

# Product show

□□□□□□□□ □□□□ □ □□□□□□□  
□□□□□□ □□ □□□□□ 10 □ □□□□ □□□  
□□□□ □ □□□  
□ □□ 2.2 □ □□ 2.0 □ □□ 1.8 □ □□□  
2.5mm □ 2.8 □□□ 3.0 □ □□  
□□ 1130 □ □□□□□ □□□□□□  
□□ 1000/1050 □ □□□□ □□□  
□□□ 660 □ □□□□□ □□□□□□  
□□□□□ 3 □ □□□□□□□  
□□□□□□□□ □ □□□□□□□



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

# More Types

## 1130 corrugaetd sheets



## 1130 trapezoidal sheets



## 900 high wave



## 980 high wave



# PVC accessories



ZXC New Material Technology Co., Ltd. 專業生產各種 PVC 及 ASA 等各種 FRP 及 UPVC 等各種 .S 等各種 .



# Our Factory





# Engineering case







# Exhibition





# Packaging














# More Types







# resin roof tile accessories

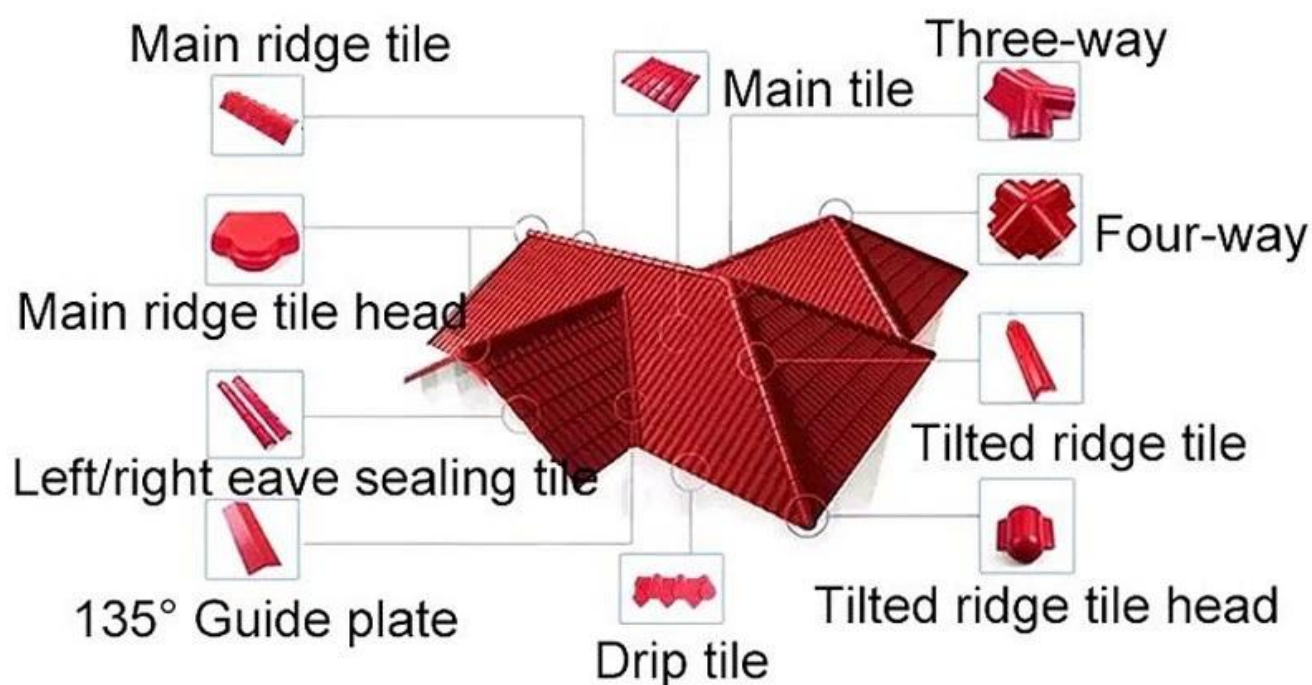

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6



# Our Factory





Engineering case



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	—	The color of tile should be uniform. There should be no stains, cracks or visible impurities on the surface. Edge of the tile should be clean without dust. Weathering should be less, and hydrolysis rate average.	Confirmed	Pass
2	Walk resistance	mm	≤ 5	8	Pass
3	Thickness deviation	mm	± 0.2	± 0.12	Pass
4	Skewness	mm/m <sup>2</sup>	—	0.00	Pass
5	Streak strength	N/m <sup>2</sup>	≥ 20	30	Pass
6	Flexural strength	%	≥ 10	10	Pass
7	Water absorption (1h, 20°C)	%	≤ 0.5	0.4	Pass
8	Acid resistance (20%, H <sub>2</sub> SO <sub>4</sub> , 24h)	—	No obvious color change or delamination phenomenon.	Confirmed	Pass
9	Alkali resistance (20%, NaOH, 24h)	—	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Freeze-thaw resistance (5 cycles, 20°C)	—	No obvious color change or delamination phenomenon.	Confirmed	Pass
11	Impact resistance (1kg, 1m)	—	≤ 10	12	Pass
12	Change index	%	≤ 0.1	0.06	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	—	The surface should be smooth with uniform coloration and no visible cracks, pits, scratch marks, surface pitting, color spots.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Streak strength	N/m <sup>2</sup>	≥ 20	26	Pass
4	Streak index	%	≤ 10	8	Pass
5	Flexural strength	N/m <sup>2</sup>	≥ 10	13	Pass
6	Flexural ductility index	%	≥ 100	160	Pass
7	Skewness	mm/m <sup>2</sup>	—	0.04	Pass
8	Water absorption (1h, 20°C)	%	≤ 0.5	0.4	Pass
9	Water absorption (3h, 20°C)	%	≤ 1.5	1.1	Pass
10	Water absorption (24h, 20°C)	%	≤ 6.0	4.8	Pass
11	Water absorption (3h, 20°C) (1h, 2h, 3h)	%	≤ 1.5	1.1	Pass
12	Water absorption (24h, 20°C)	%	≤ 6.0	4.8	Pass
13	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
14	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
15	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
16	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
17	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
18	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
19	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass
20	Water absorption (24h, 20°C) (1h, 2h, 3h)	%	≤ 6.0	4.8	Pass





# Packaging





\* 本公司所有產品均為現貨

\* 本公司所有產品均為現貨，如有需要請洽本公司。

\* 本公司所有產品均為現貨，如有需要請洽本公司。

\* 本公司所有產品均為現貨，如有需要請洽本公司。本公司所有產品均為現貨，如有需要請洽本公司。

\* 本公司所有產品均為現貨，如有需要請洽本公司。

\* 本公司所有產品均為現貨，如有需要請洽本公司。

30 天內退換，如有需要請洽本公司。

本公司所有產品均為現貨，如有需要請洽本公司。FOB: Foshan □ Guangzhou □ Shenzhen