





ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

# FRP LIGHTING ROOF TILE



***10-year  
warranty***




| الخصائص                                | القيمة                                              |
|----------------------------------------|-----------------------------------------------------|
| الرقم                                  | 01-000                                              |
| الاسم                                  | البلات                                              |
| الكمية                                 | 6000 بلاط / 11800 م <sup>2</sup>                    |
| الوصف                                  | البلات المصنوعة من الألياف الزجاجية                 |
| السمك                                  | 930 مم                                              |
| اللون                                  | 840 مم                                              |
| الوزن                                  | 660 مم                                              |
| المتانة                                | 1.0 ± 0.1 مم                                        |
|                                        | 1.2±0.1 مم                                          |
|                                        | 1.5±0.1 مم                                          |
|                                        | 2.0 ± 0.1 مم                                        |
| المتانة                                | 1.7±0.1 20/000                                      |
|                                        | 2.1±0.1 20/000                                      |
|                                        | 2.6±0.1 20/000                                      |
|                                        | 3.0±0.1 20/000                                      |
| الخصائص الفنية                         |                                                     |
| <b>SQ.M./20 FCL (21 م<sup>2</sup>)</b> | <b>40/0000 م<sup>2</sup> FCL (26 م<sup>2</sup>)</b> |
| 12000 م <sup>2</sup>                   | 15000 م <sup>2</sup>                                |
| 10000 م <sup>2</sup>                   | 12300 م <sup>2</sup>                                |
| 8000 م <sup>2</sup>                    | 10000 م <sup>2</sup>                                |
| 7000 م <sup>2</sup>                    | 8600 م <sup>2</sup>                                 |

انقر [مصنعي بلاط السقف من الألياف الزجاجية](#) لتعلم المزيد

# CUSTOMER CASE SHOW

Has more than ten years of production experience

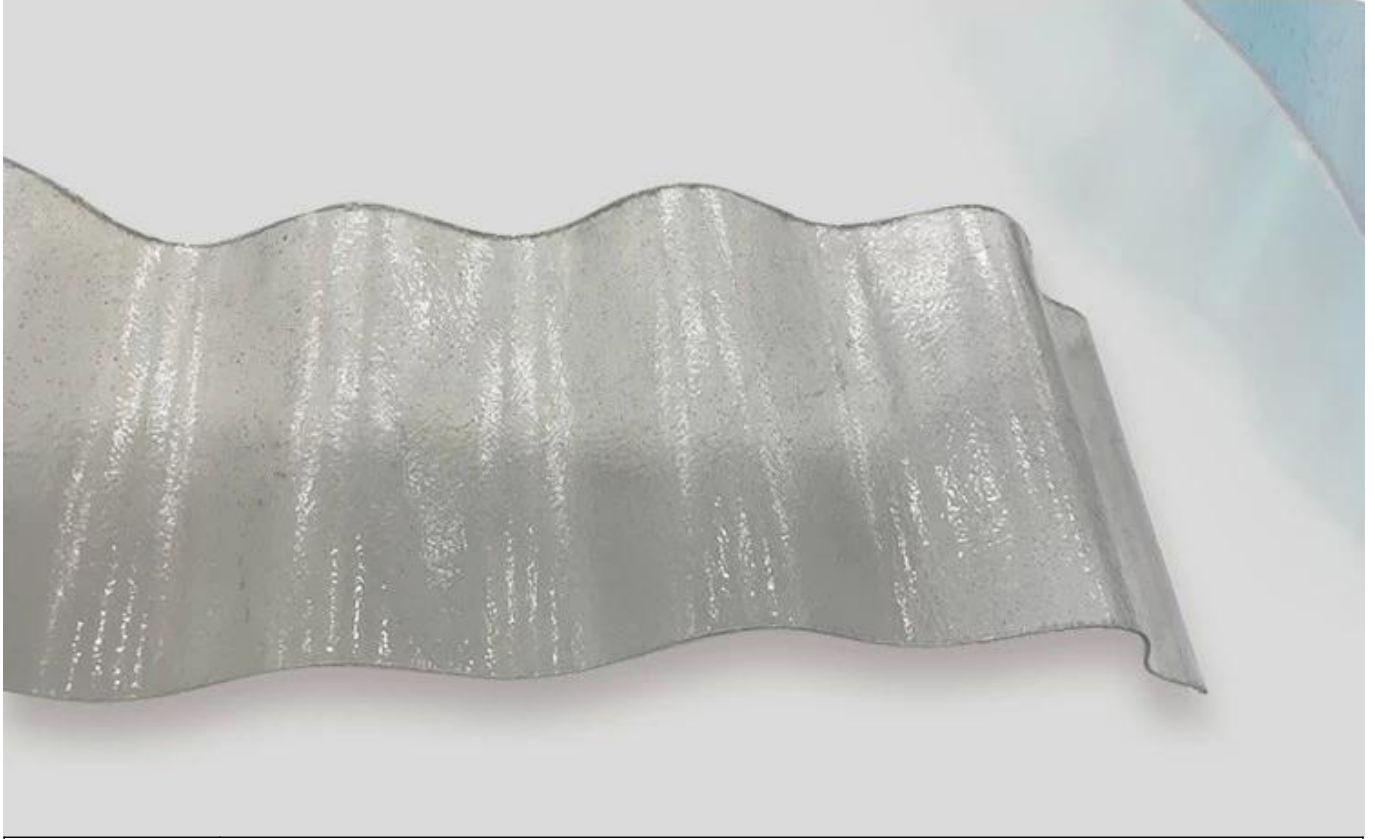

|       |                        |
|-------|------------------------|
| 厚度:   | 1.0 mm 2.8 - mm        |
| 宽度:   | 1130/ 930/ 900/ 840 mm |
| 长度:   | 可定制长度                  |
| 重量:   | 可定制重量                  |
| 表面处理: | 可定制                    |
| 其他要求: | 可定制其他要求                |

# A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

---

# PRODUCT DISPLAY

Authentic product photography highlights the quality of details



# CUSTOMER CASE SHOW

More than ten years of production experience



# APPLICABLE SCENE DISPLAY

scope of application

~



## *planting shed*

Rainproof, constant temperature  
moisturizing space, transparent



## *roof*

Good light transmission  
performance, no rain leakage



## *Villa shed*

Bright colors, more class



## *Recreation area*

Color unevenness due to weathering



# SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered



*sound  
insulation*

*Anti  
-corrosion*

*insulation*


*High  
temperature  
resistance*

*anti  
-stress*



# “ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

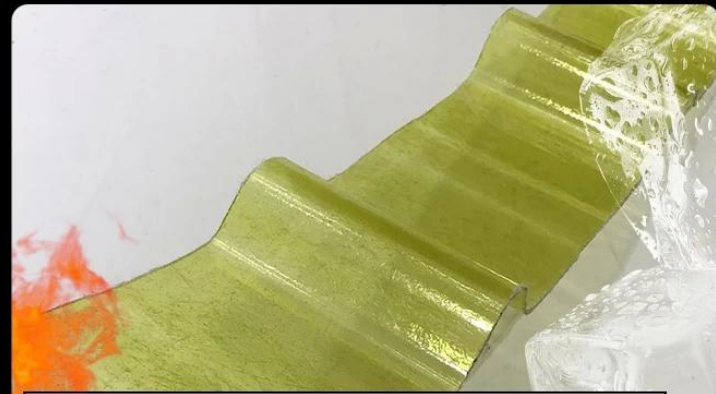

**01** High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



**02** Strong bearing capacity, more impact resistance

Add high quality glass fiber



**03** Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



## **04** Impact resistance

Shock resistant, not easy to break



## **05** Good flame retardant performance


Maintain stable performance in the temperature range of  $-40^{\circ}$ - $120^{\circ}$  without softening





# FACTORY REAL SHOT DISPLAY

Professional production to do every step

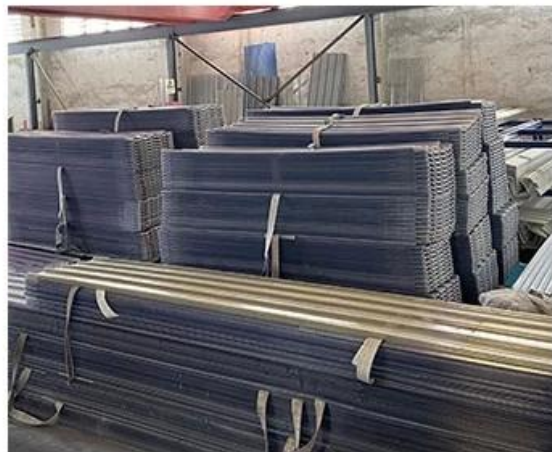

# Sampling and testing each batch of products to ensure quality

X



DISPLAY

# CUSTOM PROCESS

Easy shopping, quality assurance,  
after-sales rest assured



01

## ONLINE CONSULTATION

Provide professional product  
consultation



02

## PROVIDE PRICING

Provide reasonable price for  
product performance

03

## PREPAID CUSTOMIZATION

Deposit in advance according  
to different proportions







— **04** —

**ORDER  
PRODUCTION**

Professional and rapid production  
of multiple production lines


— **05** —

**AFTER  
DELIVERY**

Intimate and assured after-sales  
service



**Exhibition**

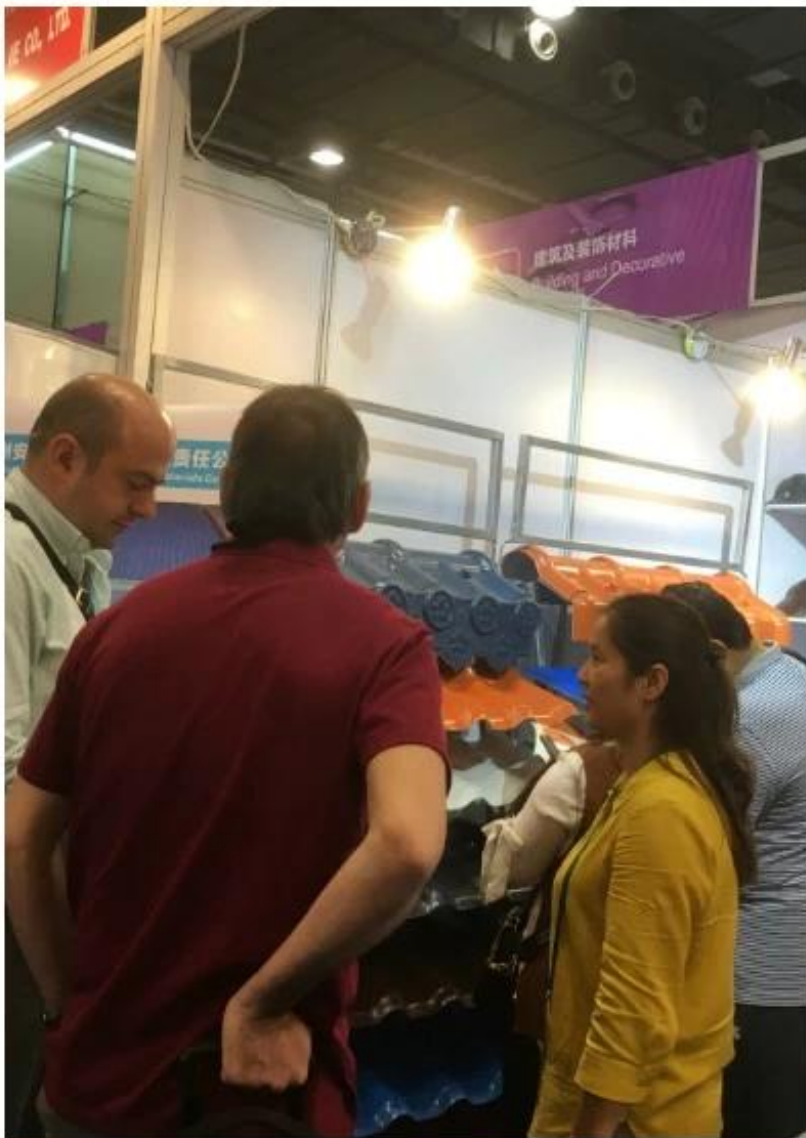

# Certificate



# Packaging



# FAQ

\* 00000 00 0000 000 00  
 0000 000 0000 000 00000 000 000 .000000 00000 00 00000 00 000000 00000 00000000 000000 000 00000 \*  
 .000000 000000 000000 00000 0000 00 00000 000 0000000000 000000 000000 0000000

00000 000000 00 0000 0000 000000 000 0000000 00\*  
 .0000000000 00000000 000000 0000000000 000000 000000 000000 00000 000000 00000 000000 000000\*

000000000 000 0000000 0000000000 000000000 000 000000 00 \*

..... \*  
.....

..... \*  
.....\*

..... \*  
..... \*

..... \*  
..... \*: T/T 30% .....  
..... 30 ..... 7 ..... •  
..... :..... •