

# Product show

FRP 产品 **ZXC FRP** : 纤维增强塑料 产品

FRP 产品 具有 强度高 重量 轻 耐腐蚀 使用寿命长 易于安装 拆卸 维护 方便 等特点。广泛应用于 化工 石油 冶金 电力 市政 建筑 等领域。

FRP 产品 特点:

FRP 产品 具有 强度高 重量 轻 耐腐蚀 使用寿命长 易于安装 拆卸 维护 方便 等特点。广泛应用于 化工 石油 冶金 电力 市政 建筑 等领域。

FRP 产品 特点:

FRP 产品 具有 强度高 重量 轻 耐腐蚀 使用寿命长 易于安装 拆卸 维护 方便 等特点。广泛应用于 化工 石油 冶金 电力 市政 建筑 等领域。

FRP 产品 具有 强度高 重量 轻 耐腐蚀 使用寿命长 易于安装 拆卸 维护 方便 等特点。广泛应用于 化工 石油 冶金 电力 市政 建筑 等领域。

FRP 产品 特点:

FRP 产品 具有 强度高 重量 轻 耐腐蚀 使用寿命长 易于安装 拆卸 维护 方便 等特点。广泛应用于 化工 石油 冶金 电力 市政 建筑 等领域。

ZXC 产品 具有 强度高 重量 轻 耐腐蚀 使用寿命长 易于安装 拆卸 维护 方便 等特点。广泛应用于 化工 石油 冶金 电力 市政 建筑 等领域。



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

# FRP LIGHTING ROOF TILE



***10-year  
warranty***




الخصائص	القيمة
الرقم	01-000
الوصف	المنتجات
الكمية	6000 منتجات / 11800 متر مربع
الوزن	المنتجات / 930 متر مربع
الارتفاع	840 متر
العرض	660 متر
السمك	1.0 ± 0.1 مم
	1.2±0.1 مم
	1.5±0.1 مم
	2.0 ± 0.1 مم
اللون	1.7±0.1 20/100
	2.1±0.1 20/100
	2.6±0.1 20/100
	3.0±0.1 20/100
المنتجات / 40/1000 متر مربع	
<b>SQ.M./20 FCL (21 متر)</b>	<b>40/1000 متر FCL (26 متر)</b>
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

[الشفافة لتعلم المزيد frp انقر الشركة المصنعة لألواح التسقيف](#)

# CUSTOMER CASE SHOW

Has more than ten years of production experience

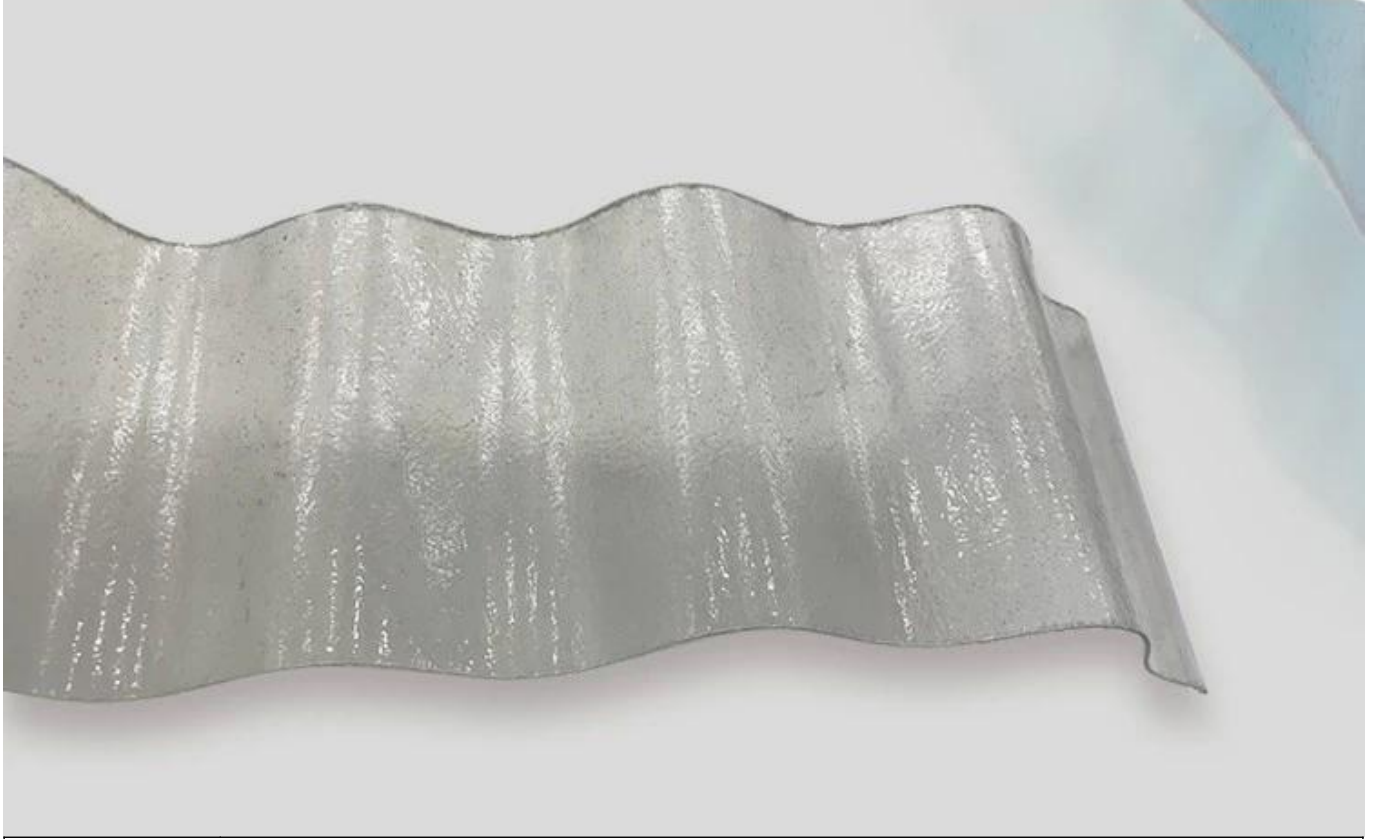

厚度:	1.0 mm 2.8 - mm
宽度:	1130/ 930/ 900/ 840 mm
长度:	可定制长度
重量:	可定制重量
表面处理:	可定制
其他要求:	可定制其他要求

# A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

---

# PRODUCT DISPLAY

Authentic product photography highlights the quality of details



# CUSTOMER CASE SHOW

More than ten years of production experience



# APPLICABLE SCENE DISPLAY

scope of application

~



***planting shed***

Rainproof, constant temperature  
moisturizing space, transparent



***roof***

Good light transmission  
performance, no rain leakage



***Villa shed***

Bright colors, more class



***Recreation area***

Color unevenness due to weathering



# SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered



*sound  
insulation*

*Anti  
-corrosion*

*insulation*

*High  
temperature  
resistance*

*anti  
-stress*



# “ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



**01** High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



**02** Strong bearing capacity, more impact resistance

Add high quality glass fiber



**03** Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



## **04** Impact resistance

Shock resistant, not easy to break



## **05** Good flame retardant performance

Maintain stable performance in the temperature range of  $-40^{\circ}$ - $120^{\circ}$  without softening



**06**

## Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.


# Our Factory

本公司 Zhongxingcheng New Material Co., Ltd. 专业生产各种塑料材料，包括 ASA、APVC、PVC、FRP、PC 等。我们拥有先进的生产设备和专业的技术团队，致力于为客户提供高质量的产品和优质的服务。



# FACTORY REAL SHOT DISPLAY

Professional production to do every step

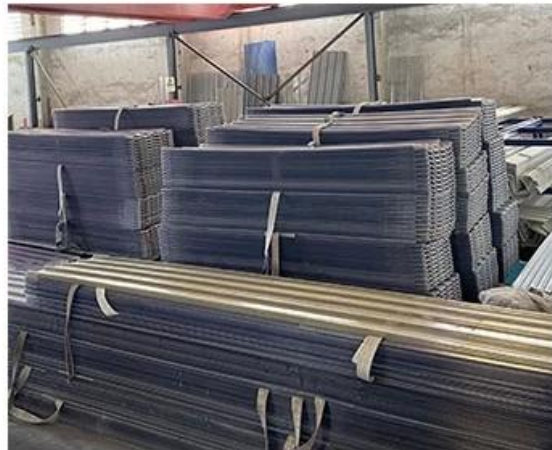

# Sampling and testing each batch of products to ensure quality

X



DISPLAY

# CUSTOM PROCESS

Easy shopping, quality assurance,  
after-sales rest assured



01

## ONLINE CONSULTATION

Provide professional product  
consultation



02

## PROVIDE PRICING

Provide reasonable price for  
product performance

03

## PREPAID CUSTOMIZATION

Deposit in advance according  
to different proportions







— **04** —

**ORDER  
PRODUCTION**

Professional and rapid production  
of multiple production lines

— **05** —

**AFTER  
DELIVERY**

Intimate and assured after-sales  
service



**Exhibition**



# Certificate

# Security sense of authoritative testing

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



# Packaging



# FAQ

\* 00000 00 0000 000 00  
 0000 000 0000 000 00000 000 000 .000000 00000 00 00000 00 000000 0000 00000000 000000 000 0000 \*  
 .000000 000000 000000 00000 0000 00 00000 000 0000000000 000000 000000 0000000

00000 000000 00 0000 0000 000000 000 0000000 00\*  
 .0000000000 00000000 000000 0000000000 000000 000000 000000 00000 000000 00000 000000 000000\*

000000000 000 0000000 0000000000 000000000 000 000000 00 \*

..... \*  
.....

..... \*  
.....\*

..... \*  
..... \*

..... \*  
..... \*: T/T 30% .  
..... 30 ..... 7 ..... •  
..... :..... •