





**PVC Roofing Sheet
Manufacture For 15 years**



Annual Output 5913000 m²

اللون	12-1
السمك	3.0-6.8 D/سم
العرض	1130 سم / 930 / 980 / 1050 / 1080 / سم
الارتفاع	30 سم
المادة	ASA PVC
الخواص	مقاومة الأشعة فوق البنفسجية، مقاومة الحريق، مقاومة التآكل، مقاومة التلوث، مقاومة البقع، مقاومة الخدوش، مقاومة الاصطدام، مقاومة التآكل، مقاومة التلوث، مقاومة البقع، مقاومة الخدوش، مقاومة الاصطدام
التثبيت	10
الدرجة	-10 درجة مئوية إلى 70 درجة مئوية
التوصيل	مقاومة التوصيل الكهربائي، مقاومة التوصيل الحراري، مقاومة التوصيل الصوتي
الوقت	2 إلى 3 سنوات
التكلفة	10 سم / سم

[انقر مصنعي بلاط السقف البلاستيكي لتعلم المزيد](#)


TYPE 840 PIT



900 TYPE HIGH WAVE (FLOWING WATER FAST)




980 TYPE HIGH WAVE

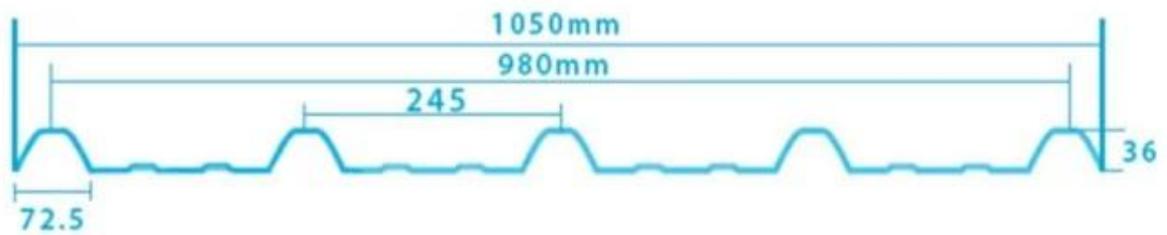


1080 TYPE HIGH WAVE

(FLOWING WATER FAST)

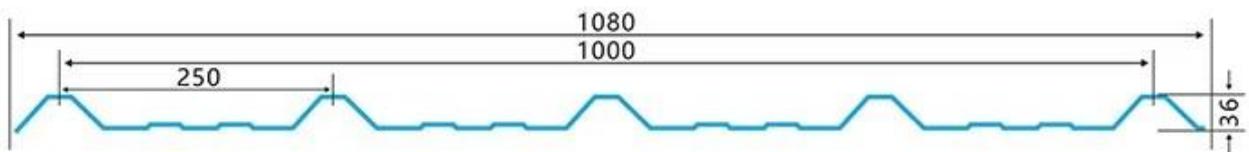



1130 TYPE WAVELET

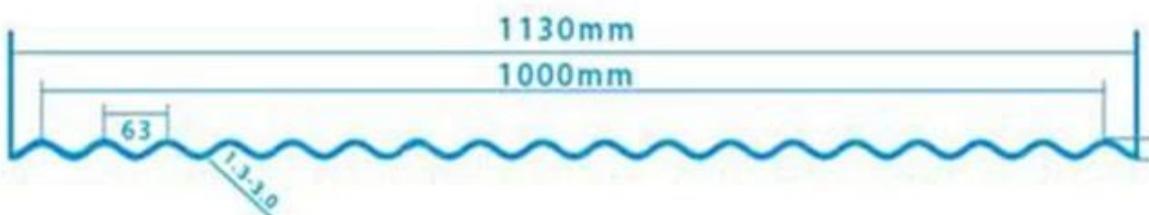


1130 TYPE PIT



1100 TYPE HIGH CIRCULAR WAVE

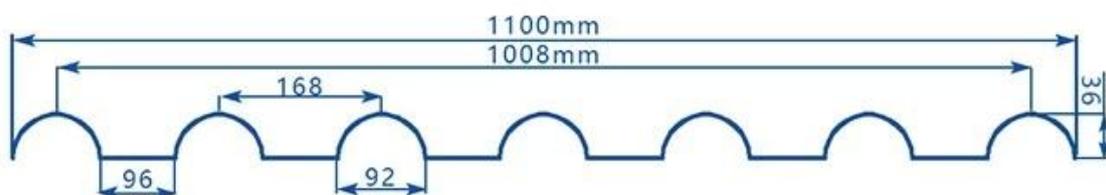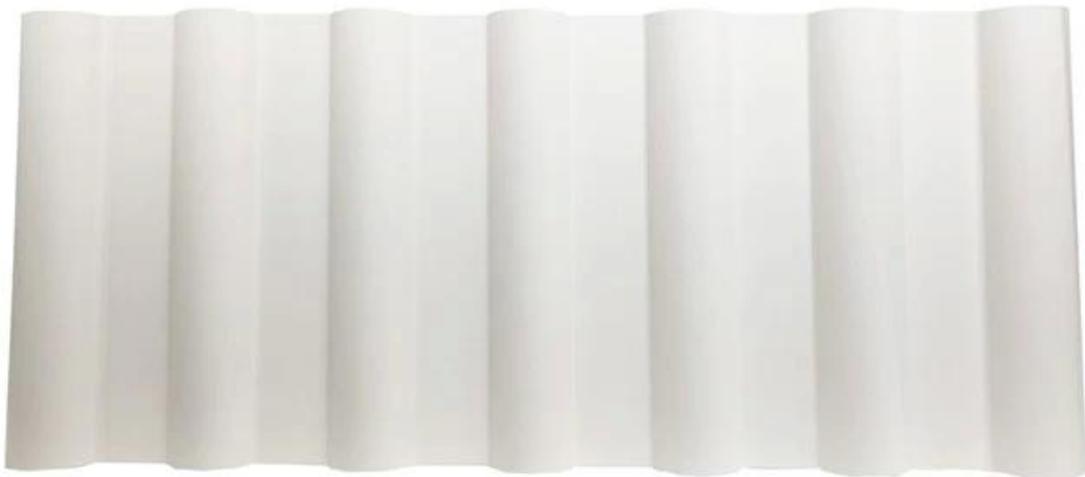

HOLLOW ROOF TILE

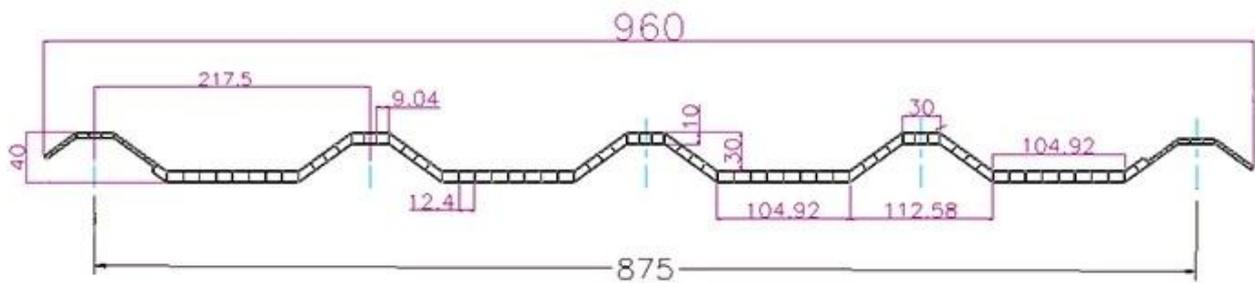

Our Factory

本公司 Zhongxingcheng New Material Co., Ltd. 专业生产各种规格的空心瓦、ASA、APVC、PVC、FRP、PC 等。我们拥有先进的生产设备和专业的技术团队，为您提供高质量的产品和优质的服务。我们的工厂位于中国，交通便利，欢迎各界人士垂询。






Delivery time **5 DAYS**
About **7000m²** per cabinet
About **28m³**



All new material
No recycled material



Hardness Testing

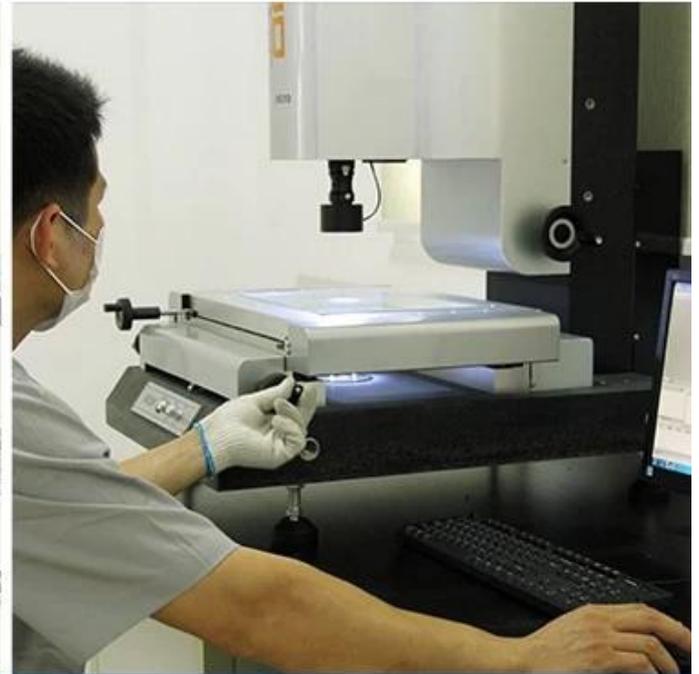

ASA Surface Thickness Test




Impact Resistance



Tensile Test



Measure product thickness
The product thickness is 2mm

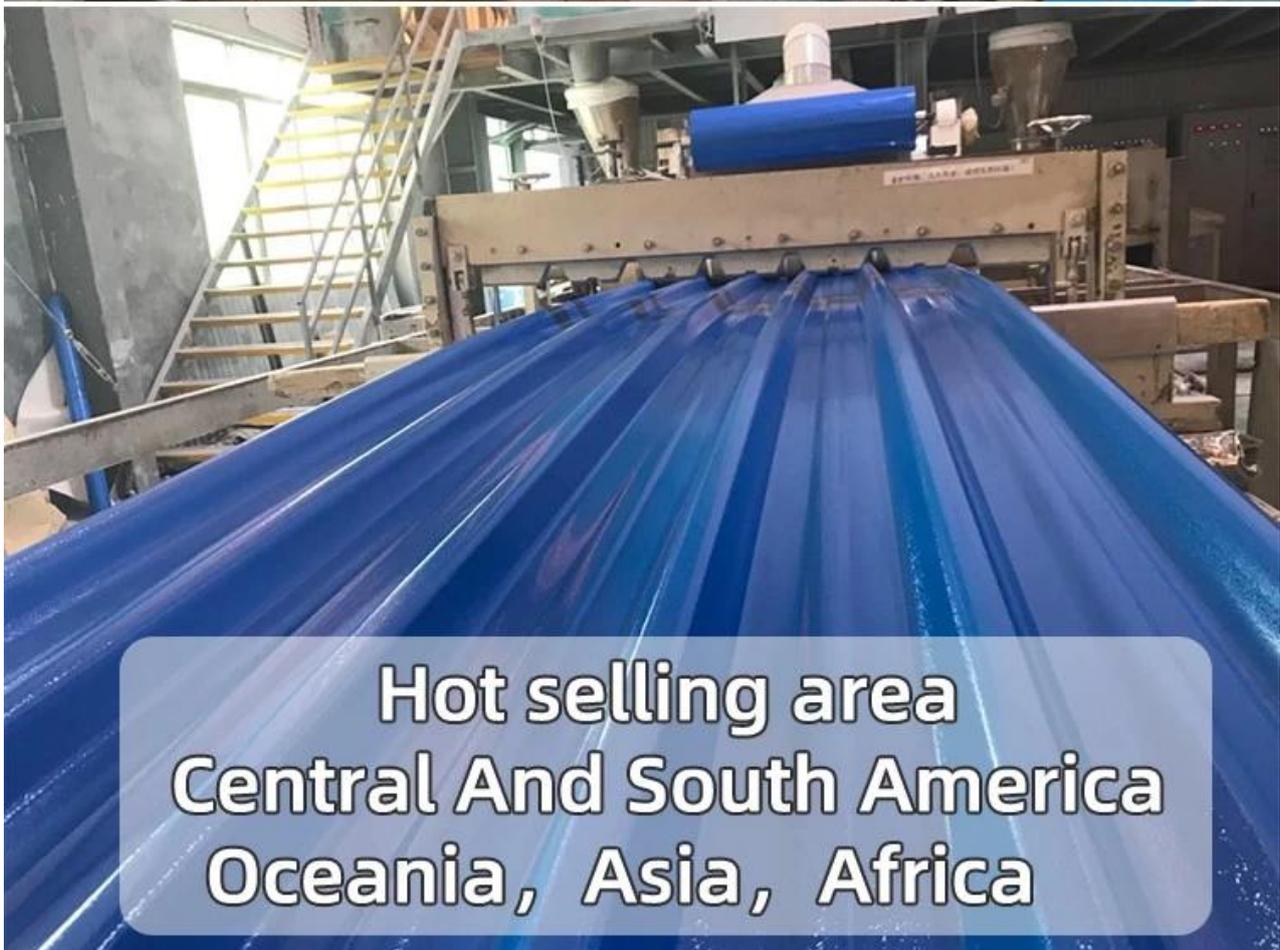

Hot selling area
Central And South America
Oceania, Asia, Africa

PVC plastic steel tile PK iron sheet tile



QUALITY

Has superior corrosion resistance



Rusty and perishable



HEAT INSULATION

**New material plastic steel tile
Good thermal insulation**



**Direct sunlight iron tile
Temperature too high**



COLOUR

**ASA PVC ROOF SHEET
Long lasting and non fading**



Severe fading



Usage scenarios: factories
farms, chemical plants



Use scene:greenhouse,
residence,pergola



Exhibition



Certificate

