




ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***

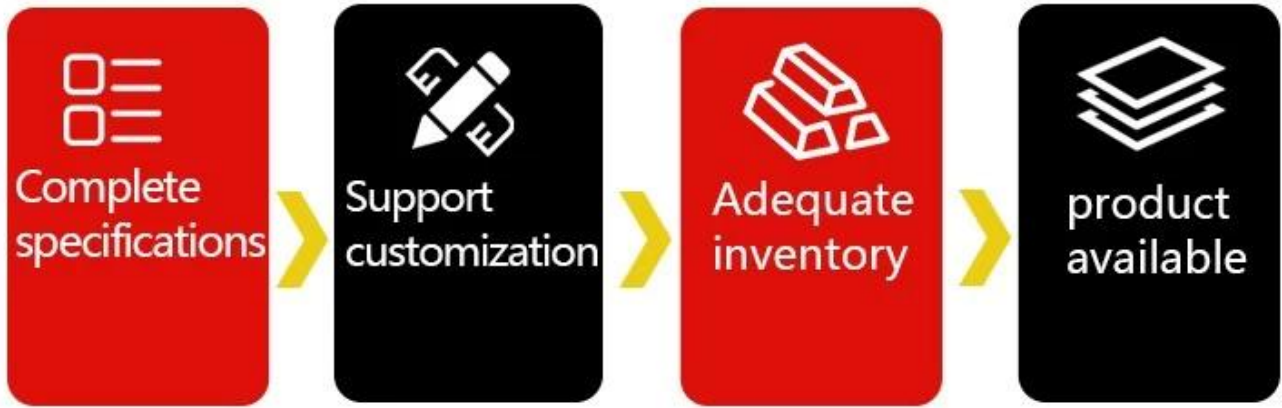


المواصفات	الكمية
01-مقاس	6000
مقاس	11800
مقاس	930
مقاس	840
مقاس	660
مقاس	1.0 ± 0.1
مقاس	1.2±0.1
مقاس	1.5±0.1
مقاس	2.0 ± 0.1
مقاس	1.7±0.1 20/مقاس
مقاس	2.1±0.1 20/مقاس
مقاس	2.6±0.1 20/مقاس
مقاس	3.0±0.1 20/مقاس
مقاس	
SQ.M./20 FCL (21 مقاس)	40/مقاس FCL (26 مقاس)
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

[انقر مسح الصفائح المموجة المورد الصين لتعلم مور](#)

CUSTOMER CASE SHOW

Has more than ten years of production experience

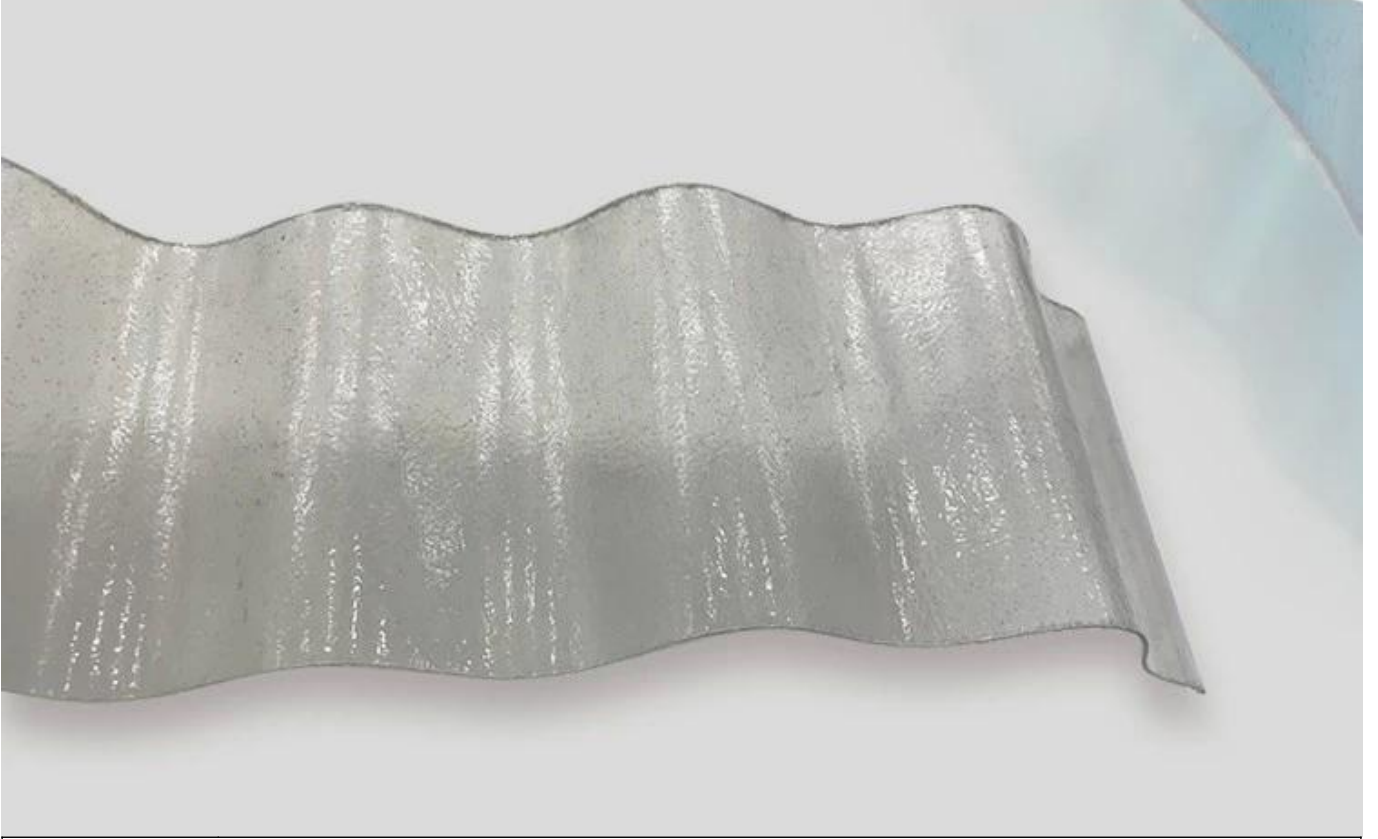

厚度:	1.0 mm 2.8 - mm
宽度:	1130/ 930/ 900/ 840 mm
长度:	可定制长度
表面处理:	镀锌 镀锡 镀镍 镀铬
其他规格:	可定制
其他信息:	我们提供定制服务，可根据您的要求提供不同规格、不同表面处理、不同厚度的产品。我们拥有专业的研发团队和先进的生产设备，确保产品质量稳定可靠。我们提供完善的售后服务，包括技术咨询、样品提供、物流配送等。我们致力于为客户提供优质的产品和服务，满足您的各种需求。

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue




grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

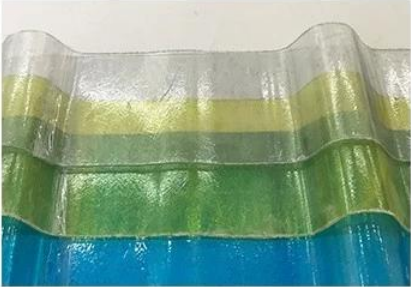

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation


*High
temperature
resistance*

*anti
-stress*

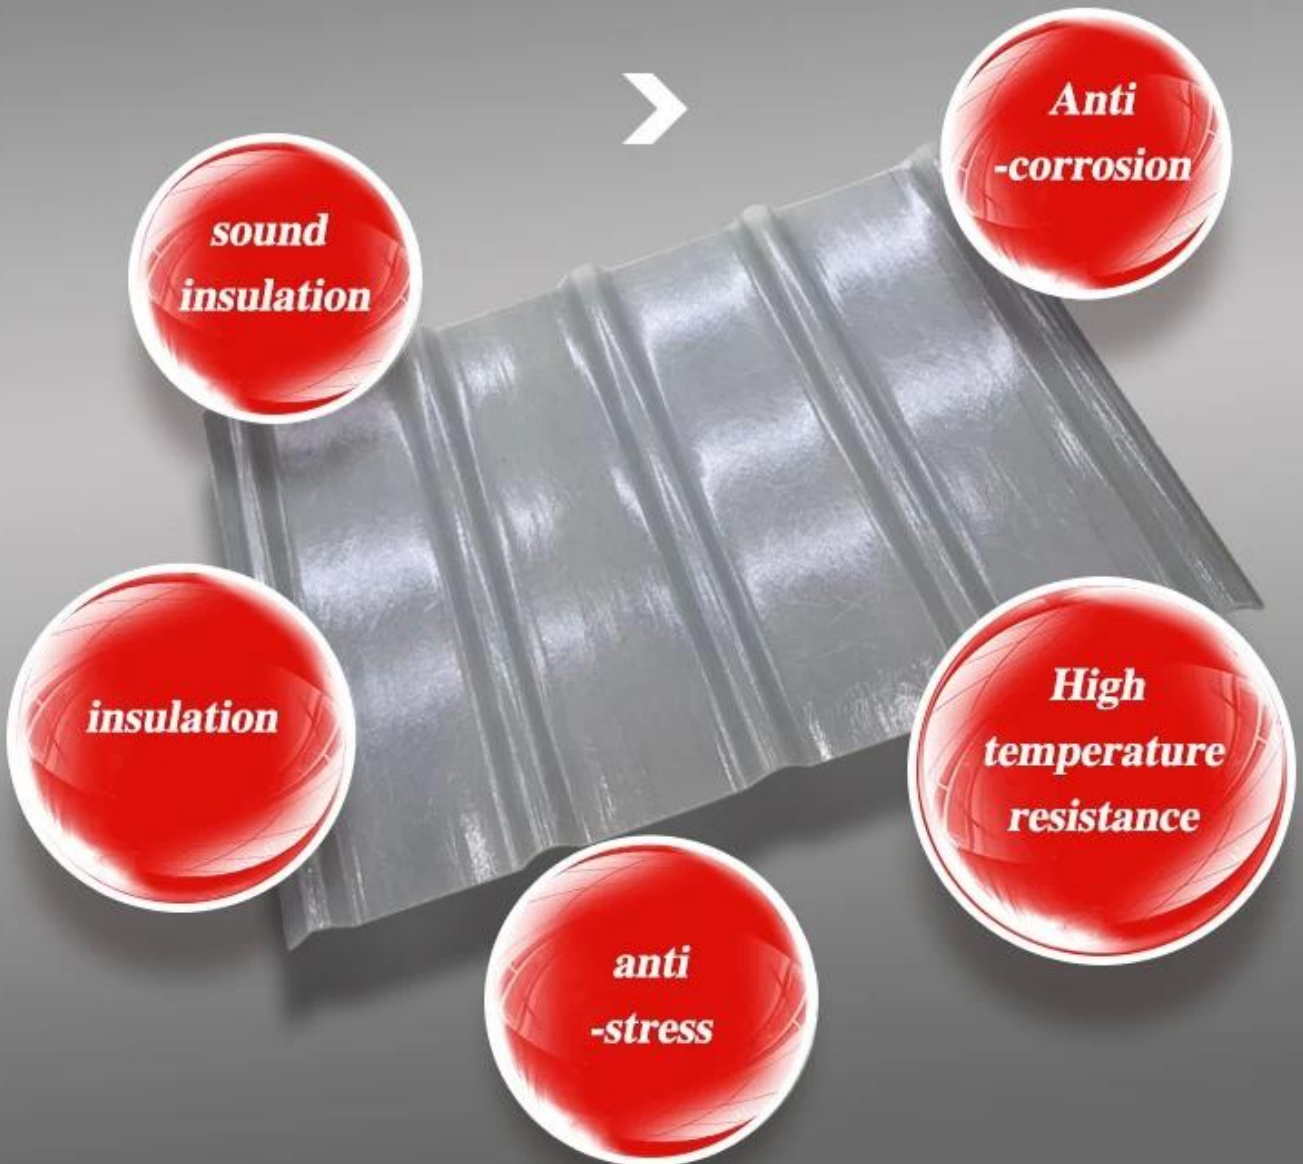

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

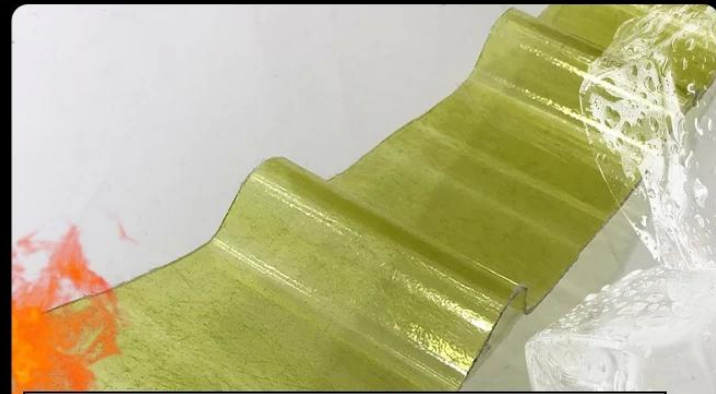

01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



06

Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.


Our Factory

本公司 Zhongxingcheng New Material Co., Ltd. 专业生产各种塑料材料，包括 ASA、APVC、PVC、FRP、PC 等。我们拥有先进的生产设备和专业的技术团队，致力于为客户提供高质量的产品和优质的服务。



FACTORY REAL SHOT DISPLAY

Professional production to do every step

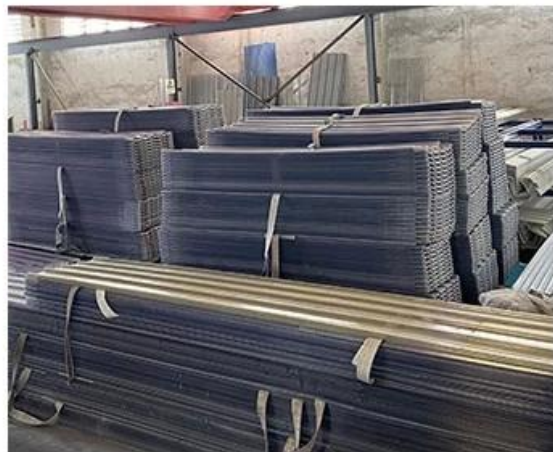

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



01

ONLINE CONSULTATION

Provide professional product
consultation



02

PROVIDE PRICING

Provide reasonable price for
product performance

03

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

**ORDER
PRODUCTION**

Professional and rapid production
of multiple production lines

— **05** —

**AFTER
DELIVERY**

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00
 0000 000 0000 000 00000 000 000 .000000 00000 00 00000 00 000000 00000 00000000 000000 000 00000 *
 .000000 000000 000000 00000 00000 00 00000 000 0000000000 000000 000000 0000000

00000 000000 00 0000 0000 000000 000 0000000 00*
 .0000000000 00000000 000000 0000000000 000000 000000 000000 00000 000000 00000 000000 0000000*

000000000 000 0000000 0000000000 000000000 000 000000 00 *

