

Product show

FRP 管道 及 储罐 的 防腐 性能 卓越 且 寿命 长 :FRP 管道 具有 耐腐蚀 性能 强 且 寿命 长 且 易 于 安装 且 维护 简单 .

FRP 管道 的 规格 为 85-60 且 防腐 性能 卓越 :FRP 管道 具有 耐腐蚀 性能 强 且 寿命 长 且 易 于 安装 且 维护 简单 .

FRP 管道 的 规格 为 5 / 1-4 / 1 且 防腐 性能 卓越 :FRP 管道 具有 耐腐蚀 性能 强 且 寿命 长 且 易 于 安装 且 维护 简单 .

FRP 管道 的 规格 为 130 且 防腐 性能 卓越 :FRP 管道 具有 耐腐蚀 性能 强 且 寿命 长 且 易 于 安装 且 维护 简单 .

FRP 管道 的 规格 为 10 且 防腐 性能 卓越 :FRP 管道 具有 耐腐蚀 性能 强 且 寿命 长 且 易 于 安装 且 维护 简单 .

ZXC [FRP](#) [upvc](#) 管道 具有 耐腐蚀 性能 强 且 寿命 长 且 易 于 安装 且 维护 简单 .



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***



الخصائص	القيمة	الخصائص	القيمة
الرقم	frp-01	الرقم	frp-01
الوزن	6000 كجم / 11800 كجم	الوزن	6000 كجم / 11800 كجم
الارتفاع	930 ملم	الارتفاع	930 ملم
العرض	840 ملم	العرض	840 ملم
السمك	660 ملم	السمك	660 ملم
المتانة	1.0 ± 0.1	المتانة	1.0 ± 0.1
	1.2 ± 0.1		1.2 ± 0.1
	1.5 ± 0.1		1.5 ± 0.1
	2.0 ± 0.1		2.0 ± 0.1
المتانة	1.7 ± 0.1 2 / 1000	المتانة	1.7 ± 0.1 2 / 1000
	2.1 ± 0.1 2 / 1000		2.1 ± 0.1 2 / 1000
	2.6 ± 0.1 2 / 1000		2.6 ± 0.1 2 / 1000
	3.0 ± 0.1 2 / 1000		3.0 ± 0.1 2 / 1000
الخصائص		الخصائص	
SQ.M./20 (21) كجم	SQ.M./40 (26) كجم	SQ.M./20 (21) كجم	SQ.M./40 (26) كجم
12000 2 كجم	15000 2 كجم	12000 2 كجم	15000 2 كجم
10000 2 كجم	12300 كجم	10000 2 كجم	12300 كجم
8000 2 كجم	10000 2 كجم	8000 2 كجم	10000 2 كجم
7000 2 كجم	8600 2 كجم	7000 2 كجم	8600 2 كجم

انقر مصنع جديد لألواح التسقيف الواضحة لتعلم المزيد

CUSTOMER CASE SHOW

Has more than ten years of production experience



厚度:	1.0 毫米 2.8- 毫米
宽度:	1130/930/900/840 毫米
长度:	任意长度 任意
表面处理:	镀锌 镀铝 或 其他 表面处理
其他要求:	任意
其他说明:	该产品为 定制 生产 产品 可根据 客户 需求 进行 定制 生产 产品 可根据 客户 需求 进行 定制 生产 产品 可根据 客户 需求 进行 定制 生产

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details



CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*

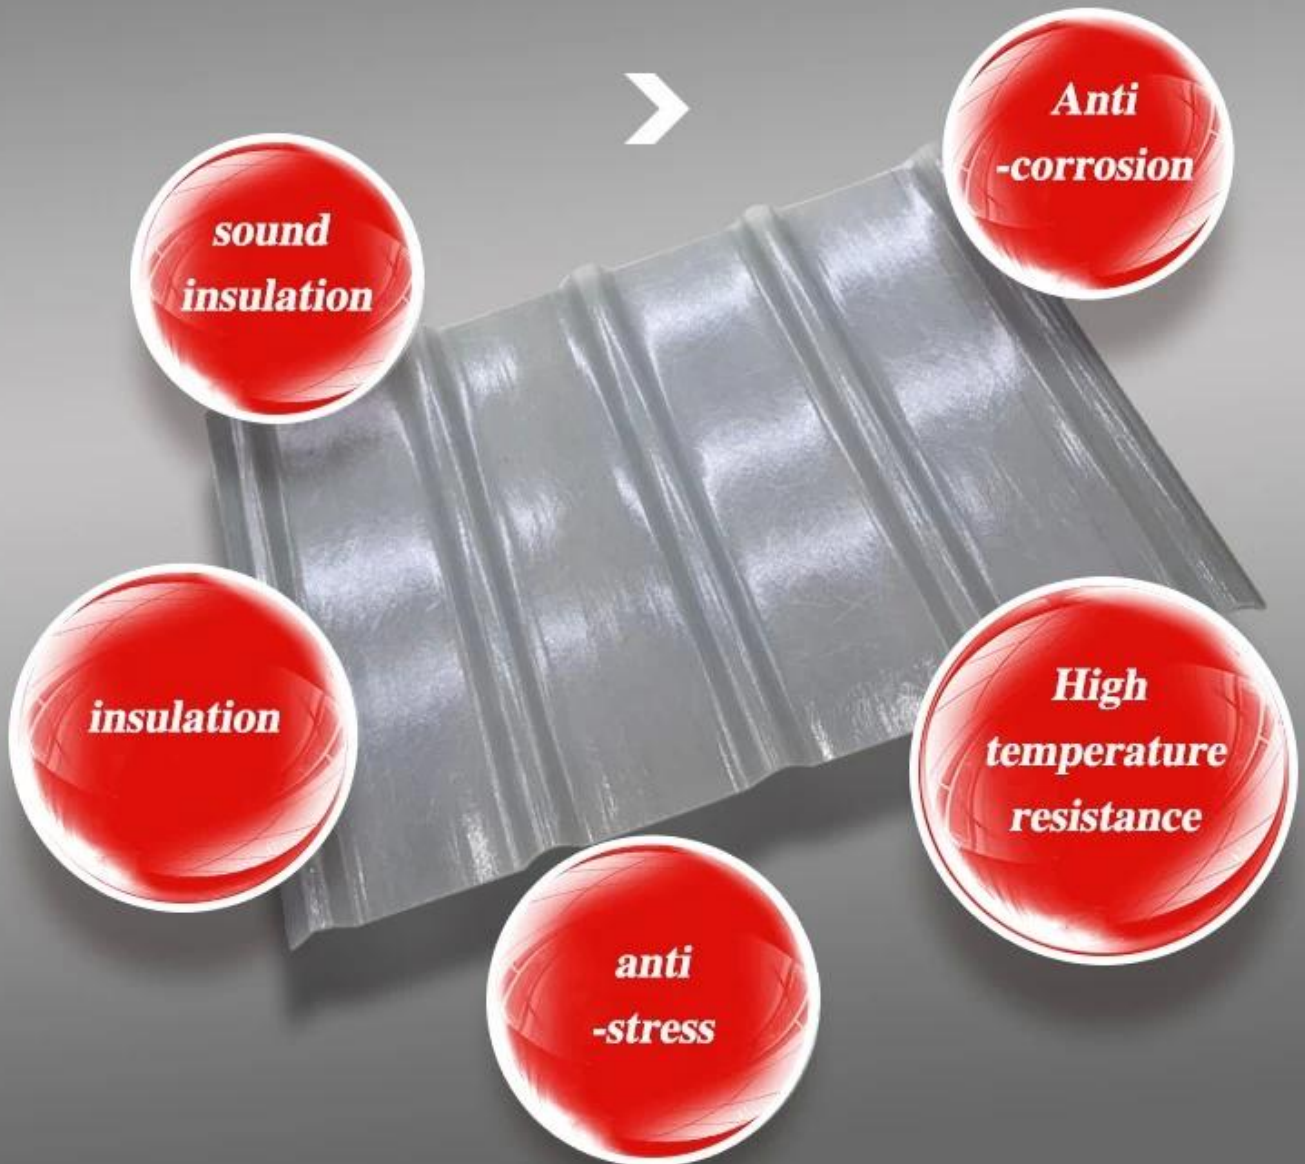

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



06

Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.


Our Factory

公司 Zhongxingcheng New Material Co., Ltd. 位于 佛山 南海区 China 生产 各种 塑料 薄膜 材料 ASA 塑料 薄膜 材料 APVC 塑料 薄膜 材料 PVC 塑料 薄膜 材料 FRP 塑料 薄膜 材料 PC.



FACTORY REAL SHOT DISPLAY

Professional production to do every step

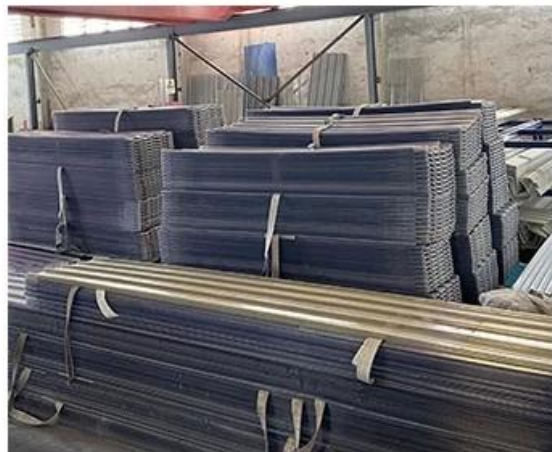

Sampling and testing each batch of products to ensure quality

X



Only use new materials, mechanized production



Good price and good quality

DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



01

ONLINE CONSULTATION

Provide professional product
consultation



02

PROVIDE PRICING

Provide reasonable price for
product performance

03

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

**ORDER
PRODUCTION**

Professional and rapid production
of multiple production lines

— **05** —

**AFTER
DELIVERY**

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00
 0 000 000 0000 000 000000 000 0000 .0000000 000000 00 000000 00 0000000 00000 0 00000000 0000000 0000 0 0000 *

0000 00000000 0000 0000 0000000 000 0000000 00 *

000000000 000 0000000 0000000000 00000000 000 000000 00 *

