

# Product show

**China pvc roofing sheet manufacturer** the main raw material is PVC with ultraviolet resistant agent and additives. Through scientific compounding, made with advanced technology.

- 1.Light weight
- 2.Environmental protection
- 3.waterproof and fireproof
- 4.Easy-installation
- 5.Anti-corrosion
- 6.Good sound insulation



zxc roofing tile industry

# After sales less is really good

Ten years of slow fading, **30** years of warranty



## GOOD CHOICE

Our advantage



Intimate service, strong product supply capacity



product available



A variety of styles and specifications sufficient stock



Support customization



Specifications and sizes can be consulted with customer service in detail, and quotations can be customized



Worry-free after sales



Manufacturers wholesale quality assurance, affordable prices, worry-free after-sales

<b>Length</b>	1m-12m
<b>Surface</b>	Matt
<b>Weight</b>	3.0-6.8kg/m
<b>Width</b>	1130mm/ 1080mm/ 1050mm/ 980mm/ 930mm
<b>Warranty</b>	30Years
<b>Model Number</b>	ASA PVC Composite Sheet
<b>Function</b>	Insulation, Flame Retardant, Heat Insulation, Anti-corrosion, Impact Resistance
<b>Shape</b>	round wave, big round wave, trepezoidal wave
<b>Fire Protection Rating</b>	B1
<b>Temperature</b>	-10 Degrees Celsius to 70 Degrees Celsius
<b>Color</b>	White, Blue, Gray, Red, customizable
<b>Layers</b>	2 or 3 layers
<b>Color Lasting</b>	10 Years no Fading

Click [asa pvc roofing manufacturer china](#) to learn more

# SOURCE MANUFACTURER #

---

>



# THE TROUBLES OF TRADITIONAL ROOF TILES

#

other products

×



## severely faded

Wind and sun soften and fade



## There is a gap

Uneven with gaps, leaking rain



## uneven color

Weathered uneven color  
phenomenon




## Fragile

Fragile and complicated  
to install

# our products ✓

Ten years of slow fading, 30 years of warranty

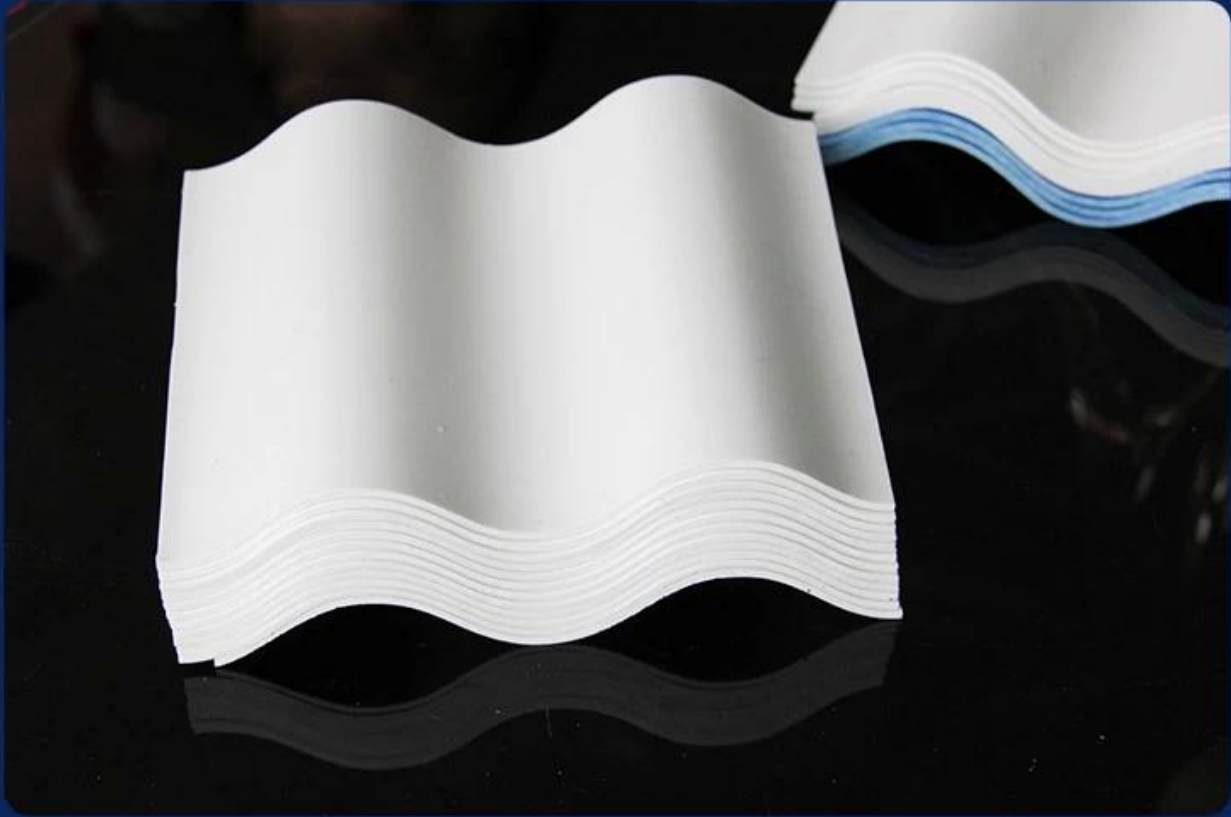

**Uniform color, durable and not easy to fade**  
Good quality, durable and bright.



high toughness



Strong pressure resistance

Effective insulation



good sound insulatio



**thermal and acoustic insulation high-quality**  
Good sound insulation effect in case of external noise



**preservative**  
Anti-acid and alkali



**flame retardant performance**  
b1 class fire performance

# PRODUCT PARAMETERS

---

#

>



<b>thickness:</b> 1.0mm-3.0mm
<b>width:</b> 1130/980/900/840/1080mm
<b>length:</b> customizable
<b>waveform:</b> big hang, small wave
<b>type:</b> asa plastic roofing tile
<b>Be applicable:</b> Factory buildings, ware houses, markets, residences, market roads, canopies, chemically corrosive factories

---



# A variety of colors, optional to build different architectural styles

More colors can be customized



<Mlight yellow>



<dark blue>




<grass green>



<Beige>

# Accessories and Installation Diagram

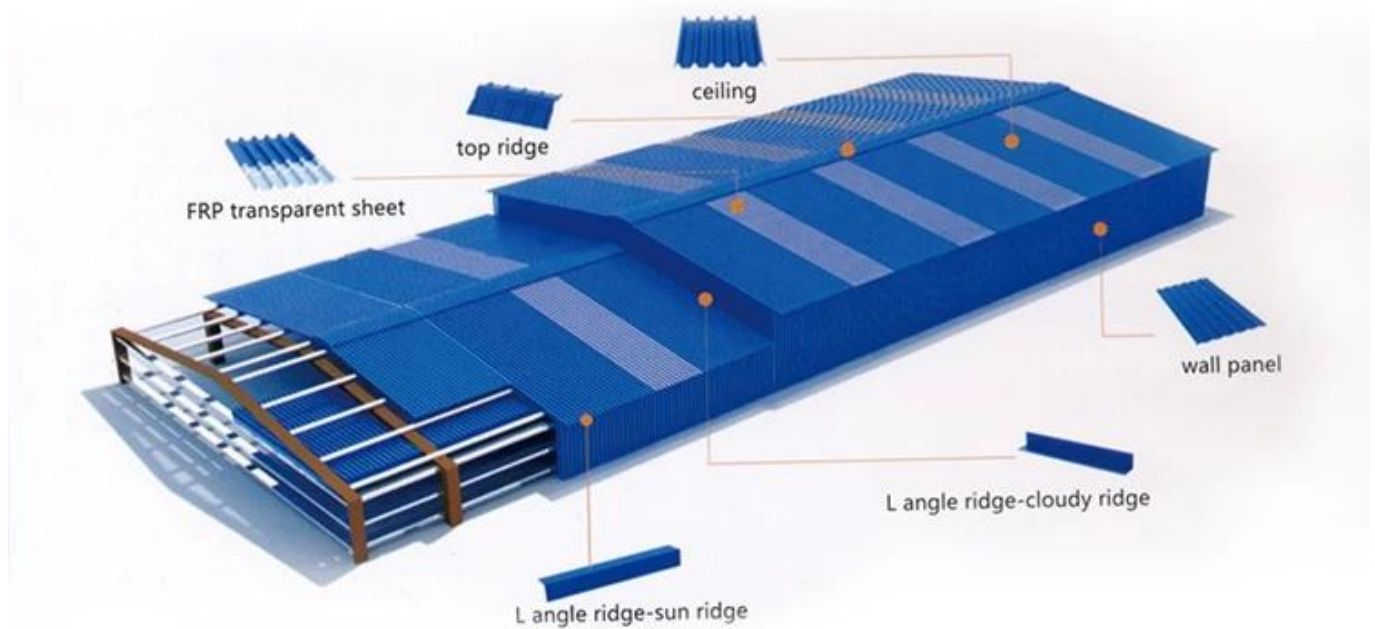

\*pvc plastic waterproof cap, used with self-tapping screws to fix the tile on the skeleton



# CUSTOMER CASE SHOW #





+

Factory renovation



Our Factory

Zhongxingcheng New Material Co., Ltd. is located in Foshan City, Nanhai District China is a manufacturer specializing in the production of ASA synthetic resin tile, APVC anti-corrosion composite tile, PVC anti-corrosion tile, PVC sink, PVC plate, Transparent FRP Roof Sheet, PVC, PC transparent tile.



## Quality inspection instruments strictly control the quality

Each batch of products has undergone rigorous testing.



Gravity testing



Hardness testing



Tensile force testing



Impact resistance testing

Factory display



In-stock inventory



Own production line



Own production line



# Exhibition





# Certificate

# Official quality inspection, quality assurance

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



佛山市质  
Foshan Supervision

佛山市质量计量监督检测中心  
检验报告

编号: QB-049-02      No: G14-WT1489  
共 2 页 第 2 页

序号	检测项目	单位	标准要求	检测结果	判定
1	外观	—	表面光滑平整, 厚度均匀, 色泽一致, 无裂纹、缺口、鼓孔、烧焦、气泡、明显麻点、杂质点	符合	合格
2	密度	g/cm <sup>3</sup>	1.45~1.65	1.64	合格
3	弯曲性能	mm	支撑跨度800mm, 载荷40kg, 允许挠度≤50	15	合格
4	冲击性能	—	1kg重钢球, 1.5m自由落体, 冲击试样无碎裂, 试样经冲击试验后不得产生贯穿的孔穴或裂纹	符合	合格
5	吸水率	%	≥60	43	合格

审核: 王博斌      主检: 陈德聪

全部合格

佛山市质量计量监督检测中心  
No: G14-WT1489

共 2 页 第 1 页

生产日期: ————  
 编号或批号: ————  
 样品编号: ————  
 检测类别: 委托检测  
 样品数量: 2件  
 检测日期: 2019年04月24日  
 检测人: 李东平

0046标准的要素:

佛山市质量计量监督检测中心  
二〇一九年四月二十四日  
 佛山市质量计量监督检测中心  
主检: 陈德聪

## Packaging



## FAQ

**\*Are you manufacturer or trader?**

\*Yes, we are real Manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

**\*Can I order the product with i want to profile?**

\*Of course you can, also we will produce the products according to your detail requests.

**\*Can you put my company's brand on your products?**

\*Yes, we accept OEM&ODM service. But we need some information about your company.

**\*How to install the roofing sheet?**

\*Please contact our service staff, we have installation video for you.

**\*Can you provide samples for me to open the market and test quality?**

\*Yes, we can. We can provide free samples to you, could you pay the shipping cost? Please contact our service staff.

**\*What is your trade term?**

\* Payment: T/T 30% in advance, balance before shipment.

- Production Lead Time: Within 7 working days after 30% deposit
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen