

Product show



1. A variety of raw materials by a certain percentage mixing, into the hopper



2. The mixed raw materials are pre-formed and heated to become flat tiles





3. Then through the mold pressure, elastic the molding, cooling, through the traction machine slowly introduced



4. To achieve the length of customer needs cut off. after artificial out



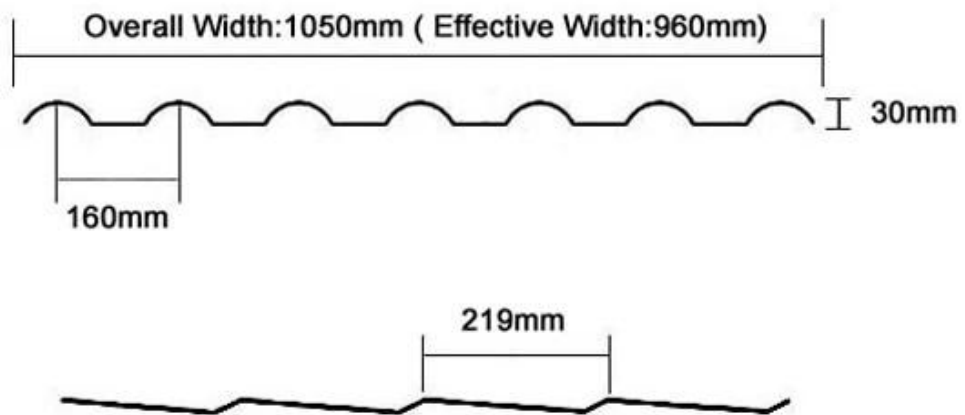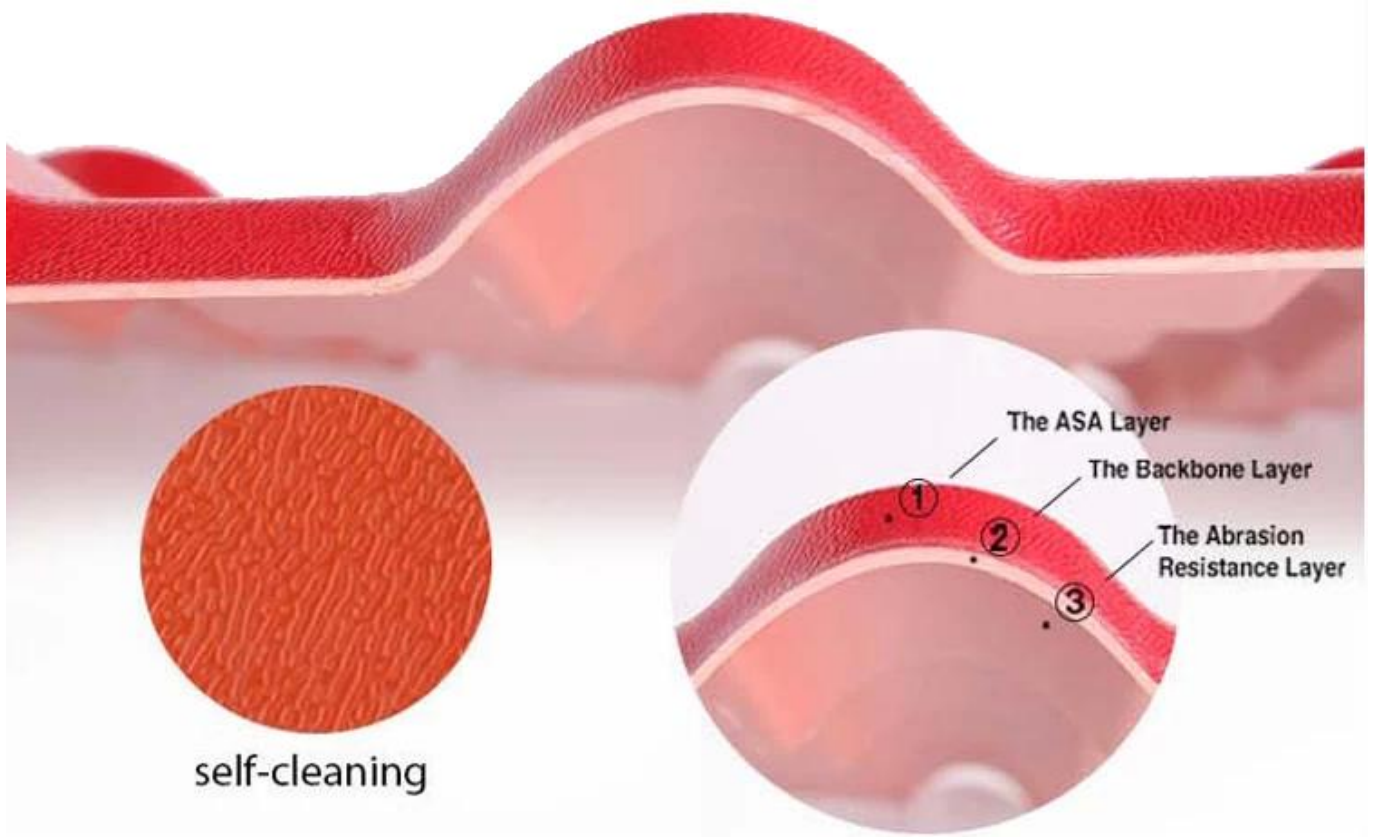

Purplish Red



Brick Red



Sky Blue










Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

Accessories





Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	—	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Wall thickness	mm	0.2	0.2	Pass
3	Thickness deviation	mm	±0.02	±0.02	Pass
4	Density	g/cm ³	—	1.170	—
5	Tensile strength	MPa	≥1.0	1.1	Pass
6	Elongation at break	%	≥2.0	3.1	Pass
7	Holding full impact	kJ/m ²	—	—	Confirmed
8	Char temperature	°C	—	—	Confirmed
9	Flammability (UL94)	—	—	—	Confirmed
10	Flammability (UL94)	—	—	—	Confirmed
11	Flammability (UL94)	—	—	—	Confirmed
12	Flammability (UL94)	—	—	—	Confirmed
13	Flammability (UL94)	—	—	—	Confirmed
14	Flammability (UL94)	—	—	—	Confirmed
15	Flammability (UL94)	—	—	—	Confirmed
16	Flammability (UL94)	—	—	—	Confirmed
17	Flammability (UL94)	—	—	—	Confirmed
18	Flammability (UL94)	—	—	—	Confirmed
19	Flammability (UL94)	—	—	—	Confirmed
20	Flammability (UL94)	—	—	—	Confirmed

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	—	The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface.	Confirmed	Pass
2	Surface roughness	mm	0.1	0.1	Pass
3	Tensile strength	MPa	≥1.0	1.1	Pass
4	Elongation at break	%	≥2.0	3.1	Pass
5	Flexural strength	MPa	≥1.0	1.1	Pass
6	Flexural modulus	MPa	≥1.0	1.1	Pass
7	Density	g/cm ³	—	1.170	—
8	Heat stability	°C	—	—	Confirmed
9	Heat stability	°C	—	—	Confirmed
10	Heat stability	°C	—	—	Confirmed
11	Heat stability	°C	—	—	Confirmed
12	Heat stability	°C	—	—	Confirmed
13	Heat stability	°C	—	—	Confirmed
14	Heat stability	°C	—	—	Confirmed
15	Heat stability	°C	—	—	Confirmed
16	Heat stability	°C	—	—	Confirmed
17	Heat stability	°C	—	—	Confirmed
18	Heat stability	°C	—	—	Confirmed
19	Heat stability	°C	—	—	Confirmed
20	Heat stability	°C	—	—	Confirmed



Our Factory





Our Customer



Packaging



FAQ

***Are you manufacturer or trader?**

***Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.**

***Can I order the product with i want to profile?**

***Of course you can, also we will produce the products according to your detail requests.**

***Can you put my company's brand on your products?**

***Yes, we accept OEM&ODM service. But we need some information about your company.**

***How to install the roofing sheet?**

***Please contact our service staff, we have installation video for you.**

***Can you provide samples for me to open the market and test quality?**

***Yes, we can. We can provide free samples to you, Could you pay the shipping cost? Please contact our service staff.**

***What is your trade term?**

*** Payment: T/T 30% in advance, balance before shipment.**

- Production Lead Time: Within 7 working days after 30% deposit**
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen**