

Product show





Product Name	Spanish Style ASA Roof Tile
Brand	ZXC
Place of Origin	Foshan city,Guangdong province,China(Mainland)
Material	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
Guarantee	25 years
Certification	ISO9001 / SGS / CE
Minimum Order Quantity	100 square meter
Delivery Time	1x20GP for 6 days,1x40GP for 7 days
Supply Ability	We have 8 produce lines,about 13500 square meter every day
Payment Terms	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,
Shipping	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Package	Pallet or PE bag
Port	Guangzhou / Shenzhen / Foshan
Application	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc

Model Number	#1050-160-30
Type	Spanish Style
Overall Width	1050mm

Effective Width	960mm
Thickness	2.3mm / 2.5mm / 2.8mm / 3.0mm
Length	Must be a multiple of section
Color	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Wave Height	30mm
Section Length	219mm

Structure

Surface:Imported ASA raw materials from the world's top 500 GE company,Super weather resistance, truly 10 years don,t have color fading.The standard is that the thickness of the surface reaches 0.15mm,We can reach 0.15-0.18mm.

Medium:The material is Polyvinyl chloride and Calcium powder,the proportion is 1:1.This is the best ratio after many trials.This ratio guarantees the strength and toughness of the product.


Bottom:The important material also is Polyvinyl chloride and Calcium powder,but add other chemical materials.We are make the same color as the surface color and white color.Gloss of products is best in the industry.

Feature

- **Long-lasting Color (at least 10 years)**
 - The product features ultra durability in natural environment.Even under tough conditions of exposure to UV,high temperature and freezing coldness,it still keeps stable color.
- **Excllent Anti-corrosion performance**
 - Synthetic Resin Tile can resist longterm acid ,alkali and salt corrosion ,etc.Tests have proved that there would be no chemical reaction after soaking in salt and alikali and various acid under 60% .It is ideal for application in areas where acid rain is common.
- **Good Waterproofing Performance**
 - Synthetic Resin Tile selects highly weater-resistant resin,which is dense and absorbing no water,with no pore penetration problem.The product is 45% wider than traditional tiles with less roof contact,so synthetic resin,s waterproof performance has greatly increased than traditional tiles.
- **Strong Fire Resistance**
 - Belonging flame retardant material,with fire resistance \geq B1 as tested by national authoritative departments according to GBB8624-2006 standard.
- **Excellent Heat Insulating Property**
 - The heat conductivity coefficient is 0.325w/m.k,about 1/300 of clay tile ,1/50 of cement tile,and 1/2000 of thick color steel tile.Therefore without condidering ading heat-preserving layer ,the heat insulation and heat preservation of synthetic resin tile can still be optimized.
- **Good sound insulation**
 - Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

Our Type

Product Shape :

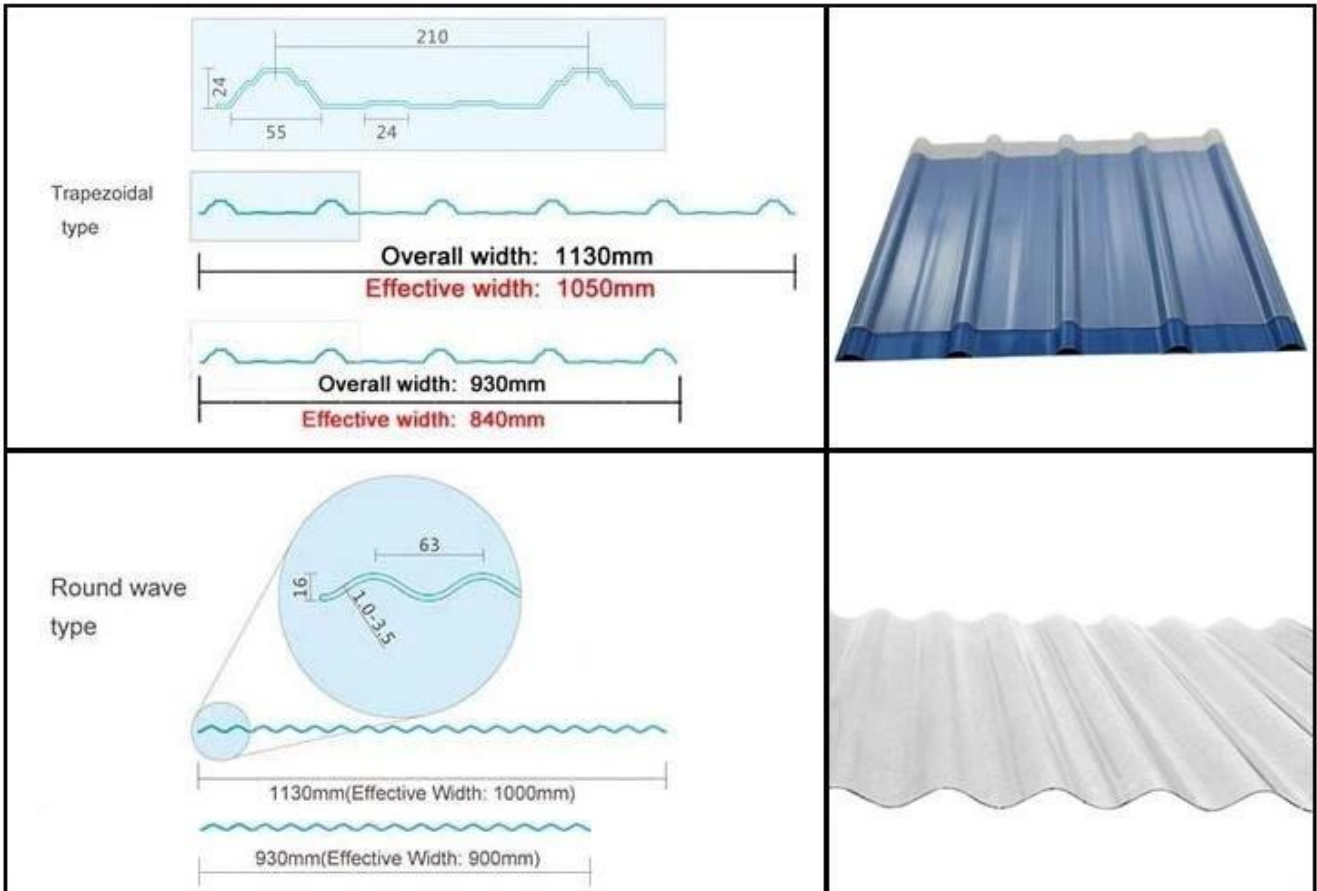

Fiberglass Transparent
Roofing Sheet



Project



Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	—	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Wall thickness	mm	0.2	0.2	Pass
3	Thickness deviation	mm	±0.02	±0.02	Pass
4	Density	g/cm ³	—	1.170	—
5	Tensile strength	MPa	≥1.0	1.1	Pass
6	Elongation at break	%	≥1.0	1.1	Pass
7	Falling ball impact	J/kg	—	—	Confirmed
8	Heat resistance	—	—	—	Confirmed
9	Flammability	—	—	—	Confirmed
10	Flame retardance	—	—	—	Confirmed
11	Flame retardance	—	—	—	Confirmed
12	Flame retardance	—	—	—	Confirmed
13	Flame retardance	—	—	—	Confirmed
14	Flame retardance	—	—	—	Confirmed
15	Flame retardance	—	—	—	Confirmed
16	Flame retardance	—	—	—	Confirmed
17	Flame retardance	—	—	—	Confirmed
18	Flame retardance	—	—	—	Confirmed
19	Flame retardance	—	—	—	Confirmed
20	Flame retardance	—	—	—	Confirmed

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	—	The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface.	Confirmed	Pass
2	Surface roughness	mm	0.1	0.1	Pass
3	Tensile strength	MPa	≥1.0	1.1	Pass
4	Elongation at break	%	≥1.0	1.1	Pass
5	Flexural strength	MPa	≥1.0	1.1	Pass
6	Flexural modulus	MPa	≥1.0	1.1	Pass
7	Density	g/cm ³	—	1.170	—
8	Heat resistance	—	—	—	Confirmed
9	Flammability	—	—	—	Confirmed
10	Flame retardance	—	—	—	Confirmed
11	Flame retardance	—	—	—	Confirmed
12	Flame retardance	—	—	—	Confirmed
13	Flame retardance	—	—	—	Confirmed
14	Flame retardance	—	—	—	Confirmed
15	Flame retardance	—	—	—	Confirmed
16	Flame retardance	—	—	—	Confirmed
17	Flame retardance	—	—	—	Confirmed
18	Flame retardance	—	—	—	Confirmed
19	Flame retardance	—	—	—	Confirmed
20	Flame retardance	—	—	—	Confirmed



Our Factory





Our Customer



Packaging



FAQ

***Are you manufacturer or trader?**

***Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.**

***Can I order the product with i want to profile?**

***Of course you can, also we will produce the products according to your detail requests.**

***Can you put my company's brand on your products?**

***Yes, we accept OEM&ODM service. But we need some information about your company.**

***How to install the roofing sheet?**

***Please contact our service staff, we have installation video for you.**

***Can you provide samples for me to open the market and test quality?**

***Yes, we can. We can provide free samples to you, could you pay the shipping cost? Please contact our service staff.**

***What is your trade term?**

*** Payment: T/T 30% in advance, balance before shipment.**

• Production Lead Time: Within 7 working days after 30% deposit

• FOB Shipping Port: Foshan, Guangzhou, Shenzhen