

# Product show

Design□Spanish style  
Color Lasting□10 years no fading  
Length□customized  
Thickness□1.8mm,2.0mm□2.2mm□2.5mm,2.8mm,3.0mm  
Overall width□1130mm  
Effective width□1000/1050mm  
Purlin spacing□660mm  
Layers□3 layers  
Surface□Embossed/Smoothsurface



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

# More Types

## 1130 corrugaetd sheets



## 1130 trapezoidal sheets




## 900 high wave



## 980 high wave



# PVC accessories

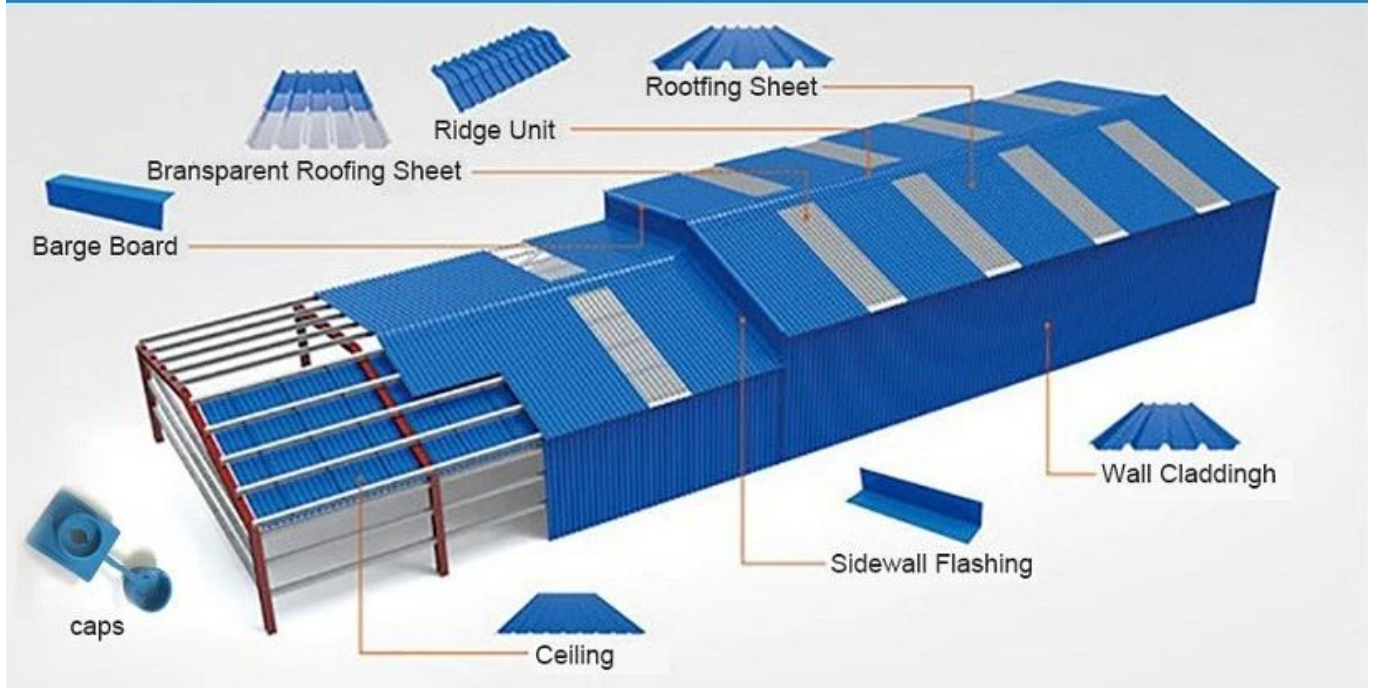

ZXC New Material Technology Co., Ltd. Our products include PVC sheets, ASA Synthetic Resin Roof Tile, FRP Roofing Tiles, gutter, upvc roofing sheets etc. If your order matches our stock size details, we can faster delivery time. Welcome Contact Us Custom.



# Our Factory





# Engineering case



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no holes, cracks or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and both sides are straight.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Density	g/cm <sup>3</sup>	---	1.98	---
5	Break strength	MPa	≥ 20	30	Pass
6	Flexural strength	%	≥ 20	30	Pass
7	Water absorption (1h, 2h)	---	No pollution, cracks or water absorption test.	Confirmed	Pass
8	Acid resistance (3% HCl, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
9	Alkali resistance (5% NaOH, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Surface impregnating agent (waterproofing)	mm	≤ 1.0	0.2	Pass
11	Change index	%	≤ 10	7.0	Pass

Total of the report: 11/11

Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no obvious cracks, holes, scratch marks, surface pitting, color spots.	Confirmed	Pass
2	Surface face thickness	mm	0.17	0.18	Pass
3	Break strength	MPa	≥ 20	26	Pass
4	Flexural strength	%	≥ 20	30	Pass
5	Water absorption	%	≤ 0.5	0.3	Pass
6	Flexural strength	MPa	≥ 20	30	Pass
7	Density	g/cm <sup>3</sup>	1.97	1.98	Pass
8	Water absorption (1h, 2h)	---	No pollution, cracks or water absorption test.	Confirmed	Pass
9	Acid resistance (3% HCl, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Alkali resistance (5% NaOH, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
11	Surface impregnating agent (waterproofing)	mm	≤ 1.0	0.2	Pass
12	Change index	%	≤ 10	7.0	Pass

Total of the report: 12/12





# Exhibition





# Packaging





# FAQ

**\*Are you manufacturer or trader?**

\*Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

**\*Can I order the product with i want to profile?**

\*Of course you can, also we will produce the products according to your detail requests.

**\*Can you put my company's brand on your products?**

\*Yes,we are accept OEM&ODM service.But we need some information about your company.

**\*How to install the roofing sheet?**

\*Please contact our service staff, we have installation video for you.

**\*Can you provide samples for me to open the market and test quality?**

\*Yes,we can.We can provide free samples to you.

**\*Could you pay the shipping cost?**

Please contact our service staff.

**\*What is your trade term?**

\* Payment: T/T 30% in advance, balance before shipment.

? Production Lead Time: Within 7 working days after 30% deposit

? FOB Shipping Port: Foshan,Guangzhou,Shenzhen