

# Product show

ZXC PVC roof tiles are made of high-quality PVC resin and are characterized by their excellent performance and long service life. They are suitable for various building types and can be used in a wide range of climates. The tiles are available in various colors and finishes to meet different aesthetic requirements.

- 1. Light weight
- 2. High strength
- 3. Easy to install
- 4. Durable
- 5. Good waterproofing
- 6. Environmental friendly

## Heat-insulating PVC plastic roof tiles




Length	12m
Width	1.2m
Weight	3.0-6.8kg/m²
Installation	1130mm/930mm/980mm/1050mm
Color	10 colors
Material	PVC resin
Application	Industrial buildings, residential buildings, warehouses, etc.
Advantages	Lightweight, strong, easy to install, long service life, etc.

מספר מודל	B1
מידות	70 ס"מ x 1130 ס"מ
סוג גל	גל, גל, גל, גל
בד	2-3 מ"מ
משקל	10 ק"ג

[ללמוד יותר](#) [PVC נקישה](#) [יצרני יריעות קירו](#)

## PVC roof tile product parameters

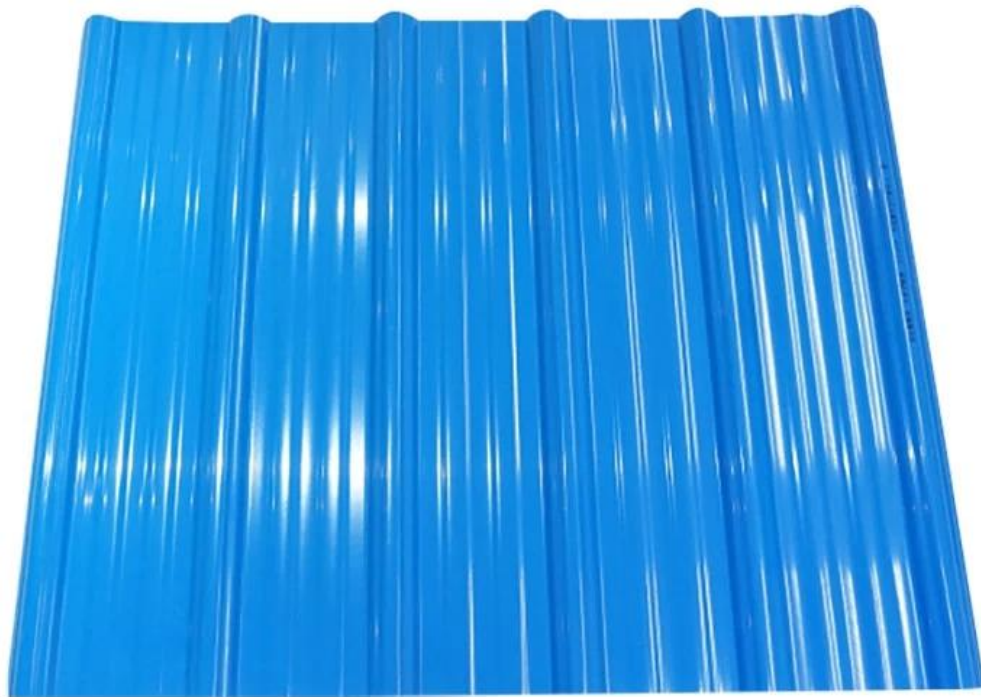

Name: PVC Roofing tile

Width: 1130mm

Thickness: 1.3-3.0mm (Customized)

Waveform: Trapezoid Type and Wavelet Type


TLength: Customizable (within 6 meters recommended)

Color: Blue, white, above 800 square meters can be customized other colors.

Apply: Corrosive workshops, pig sheds, warehouses, carports, canopies and other roofing building materials.

## Product dimension specifications

The width of the roofing tile is fixed at 1.13 meters.

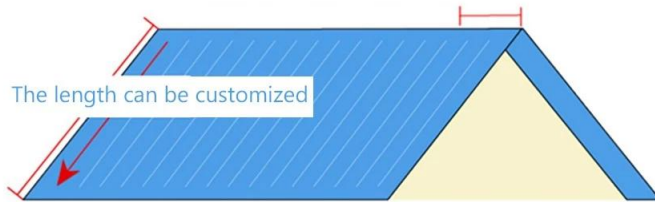



### Type 1130 Wavelet(effective width 1 meter)



### Type 1130 Trapezoid(effective width 1 meter)



### Detail show Focus on one detail well

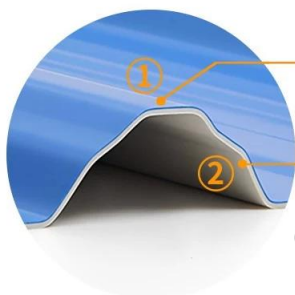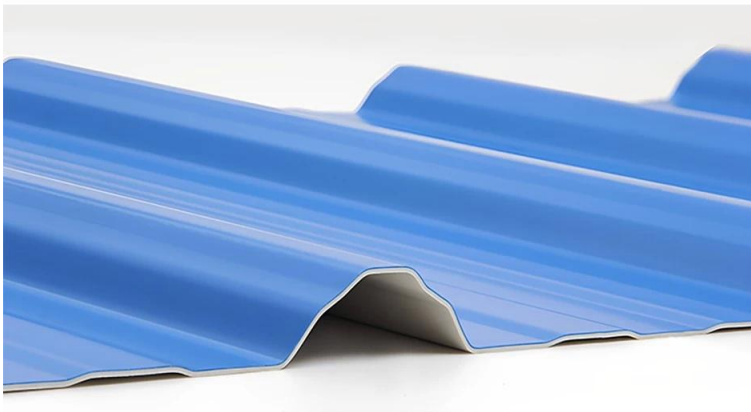

① Ordinary PVC anti-corrosion layer

Suitable for corrosive factory.

② Tough, high-strength layer

Can be made up-white and down-blue or up- blue and down-white.

Can be customized single color, two colors, three colors.



**case display**  
Learn all about our products





## PVC roof tile compared to iron roof tile

It is not afraid of acid, alkali, salt and other chemical corrosion



Iron roof tiles are prone to corrosion.



PVC is corrosion-proof and has a long service life



High maintenance cost repair once every two years



fireproof, high safety resistant to rust, long life



# Our Factory

Zhongxingcheng New Material Co., Ltd 专业生产 各种规格 各种颜色 各种厚度 ,各种规格 各种厚度 ,各种规格 各种厚度 各种规格 各种厚度 各种规格 各种厚度 ASA, 各种规格 各种厚度 各种规格 各种厚度 APVC, 各种规格 各种厚度 PVC 各种规格 各种厚度 PVC, 各种规格 各种厚度 PVC, 各种规格 各种厚度 FRP, PVC, 各种规格 各种厚度 各种规格 各种厚度.



## Quality inspection instruments strictly control the quality

Each batch of products has undergone rigorous testing.



Gravity testing



Hardness testing



Tensile force testing



Impact resistance testing



Factory display



In-stock inventory



Own production line



Own production line





# Exhibition





# Certificate

# Official quality inspection, quality assurance

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



佛山市质量计量监督检测中心  
**检验报告**  
 报告号: QB-049-02  
 样品号: G14-WT1489  
 共 2 页, 第 2 页

序号	检测项目	单位	标准要求	检测结果	判定
1	外观	—	表面光滑平整, 厚度均匀, 色泽一致, 无裂纹、缺口、破孔、烧焦、气泡、明显麻点、杂质点	符合	合格
2	密度	g/cm <sup>3</sup>	1.45~1.65	1.64	合格
3	弯曲性能	mm	支撑跨度800mm, 载荷40kg, 允许挠度≤50	15	合格
4	冲击性能	—	1kg重钢球, 1.5m自由落体, 冲击试样无碎裂, 试样经冲击试验后不得产生贯穿的孔穴或裂纹	符合	合格
5	吸水率	%	≥60	43	合格

审核: 王博斌  
 主检: 陈德聪  
**全部合格**

佛山市质  
 Foshan Supervision

佛山市质量计量监督检测中心  
 No. G14-WT1489

生产日期: —  
 生产日期: —  
 样品编号: —  
 检测日期: 2019年02月21日  
 检测人: 李博宇





.0000 000000 000000 000 00000000 00 000000 000000 00 ,00000 00000 000000\*

?0000 00000000 00 0000 000000 00 000000 00 000000 0000 0000 0000 0000\*  
000000 00000000 000000 ,00 \* OEM & ODM. .0000 000000 00 00000 0000 00000000 000000 0000

?0000 000000 00 0000000000 0000\*  
.00000000 00000000 00000000 0000 00 ,000000 0000000000 00000 00 0000 0000 0000\*

?00000000 00 00000000 000000 00 00000000 0000 0000000000 00 000000 00000 0000 0000\*  
0000 0000 0000 ?000000000 000000 00 000000 000000 0000 0000 ,000000 0000000000 00 000000 000000000 000000 .00000000 000000 ,00\*  
.000000 000000000 000000 00

?0000 00000 000000 0000\*  
00000000 \*: T/T 30% .0000000000 000000 000000 ,000000  
.30% 00 00000000 000000 00000000 0000 7 000000 :00000000 00000000 0000 •  
00000000 0000 • FOB: 000000 ,0000'0000000000 ,00000000