

Product show

Reka bentuk: Gaya Sepanyol
Warna Berkekalan: 10 Tahun Tidak Pudar
Panjang: disesuaikan
Ketebalan: 1.8mm, 2.0mm, 2.2mm,
2.5mm, 2.8mm, 3.0mm
Lebar keseluruhan: 1130mm
Lebar berkesan: 1000/1050mm
Jarak purlin: 660mm
Lapisan: 3 lapisan
Permukaan: Embossed/smoothsurface



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

More Types


1130 corrugaetd sheets




1130 trapezoidal sheets




900 high wave

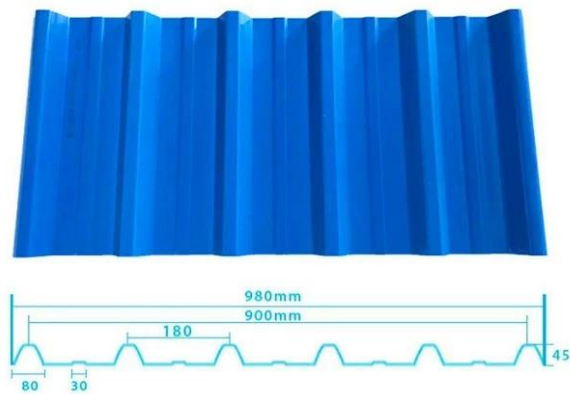

980 high wave

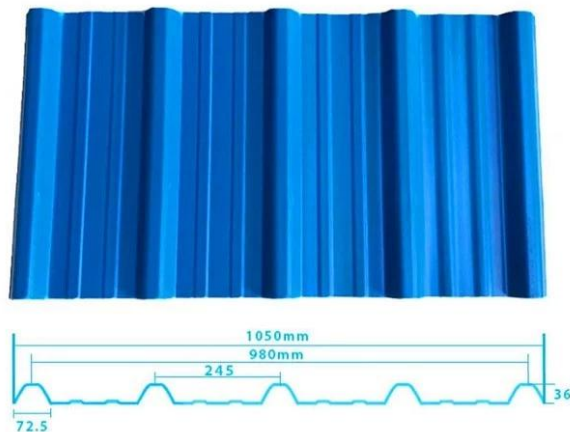

PVC accessories

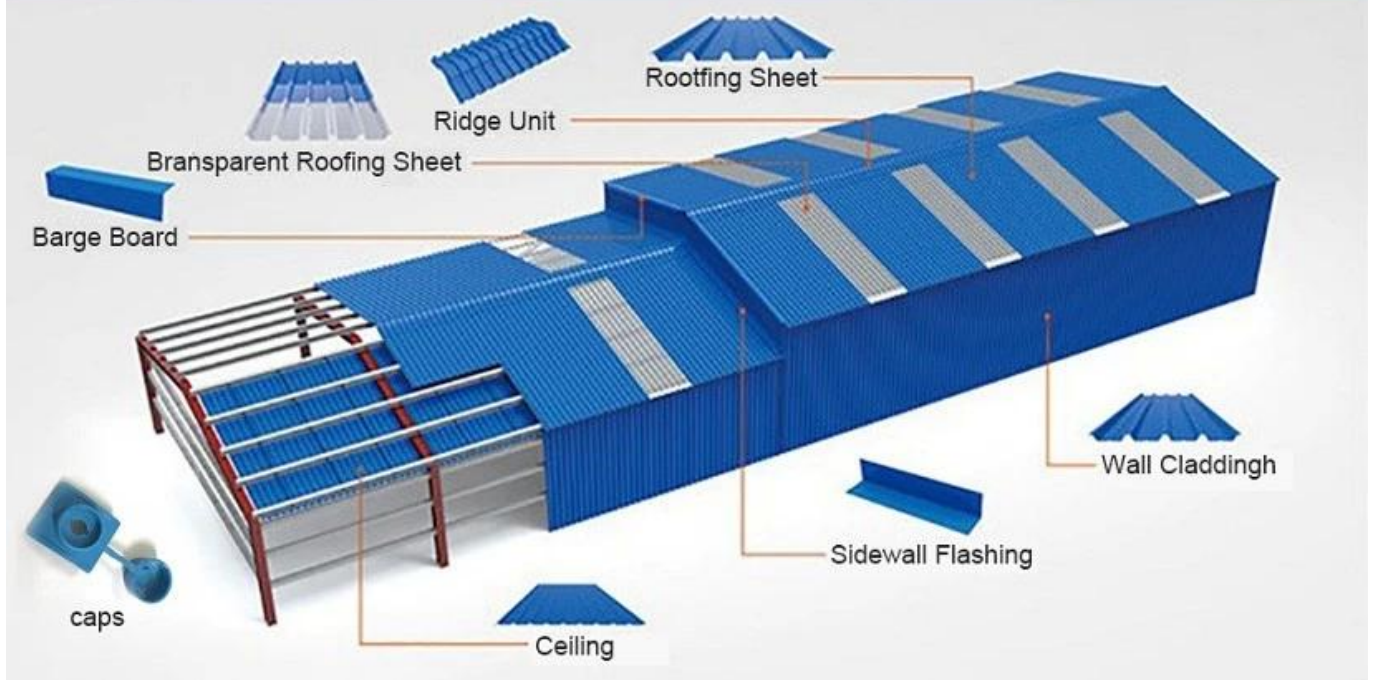


ZXC New Material Technology Co., Ltd. adalah **Pembekal Lembaran Bumbung Plastik Bergorrugated**. Produk kami termasuk lembaran PVC, jubin bumbung resin sintetik ASA, jubin bumbung FRP, longkang, lembaran bumbung UPVC dan lain -lain. Jika pesanan anda sepadanS butiran saiz stok kami, kami boleh lebih cepat masa penghantaran. Selamat Datang Hubungi Kami Custom.

Our Factory



Engineering case

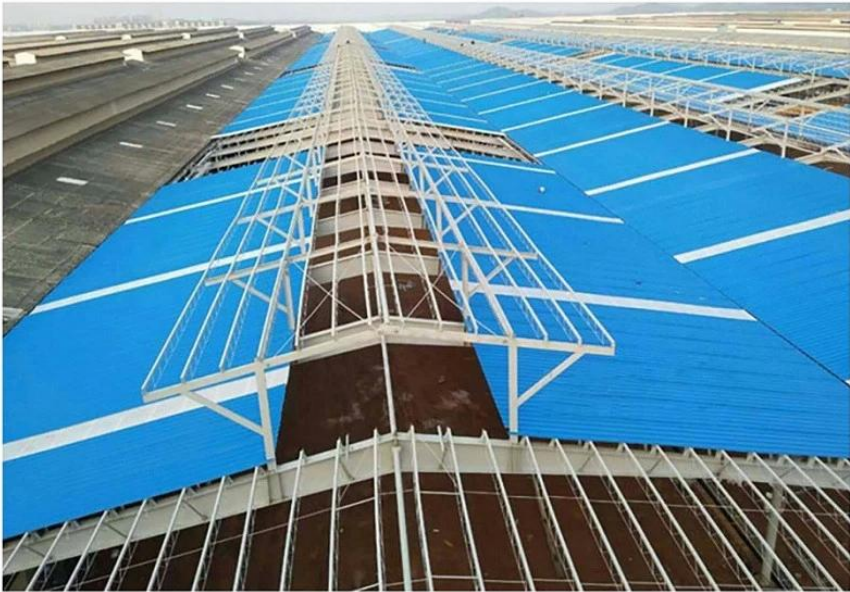

Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no stains, cracks or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and both sides are straight.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.12	Pass
4	Slip-resistance	1/100	---	170	---
5	Flexure strength	MPa	≥ 20	30	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 3h, 7d)	---	No significant change in water absorption	---	Confirmed
8	Acid resistance (5%, 10%, 20%)	---	No obvious color change in acid resistance	---	Confirmed
9	Alkali resistance (5%, 10%, 20%)	---	No obvious color change in alkali resistance	---	Confirmed
10	Impact resistance (1kg, 2kg)	---	---	478	12
11	Change index	%	≤ 0.1	0.02	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible cracks, pits, scratch marks, surface pitting, color spots.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	MPa	≥ 20	26	Pass
4	Flexure strength	MPa	≥ 20	30	Pass
5	Flexural modulus	MPa	≥ 2000	3000	Pass
6	Slip-resistance	1/100	---	170	---
7	Water absorption (1h, 3h, 7d)	---	No significant change in water absorption	---	Confirmed
8	Acid resistance (5%, 10%, 20%)	---	No obvious color change in acid resistance	---	Confirmed
9	Alkali resistance (5%, 10%, 20%)	---	No obvious color change in alkali resistance	---	Confirmed
10	Impact resistance (1kg, 2kg)	---	---	478	12
11	Change index	%	≤ 0.1	0.02	Pass



Exhibition



Packaging



FAQ

***Adakah anda pengilang atau peniaga?**

*Ya, kami adalah pengeluar sebenar, terdapat banyak gambar dalam pengenalan syarikat kami. Jika anda memerlukan produk khas lain, kami akan melakukan yang terbaik untuk membantu anda, jadi kami dapat membina hubungan perniagaan jangka panjang.

***Bolehkah saya memesan produk dengan saya mahu profil?**

*Sudah tentu anda boleh, kami juga akan menghasilkan produk mengikut permintaan terperinci anda.

***Bolehkah anda meletakkan jenama syarikat saya pada produk anda?**

*Ya, kami menerima perkhidmatan OEM & ODM. Tetapi kami memerlukan beberapa maklumat mengenai syarikat anda.

***Bagaimana cara memasang lembaran bumbung?**

*Sila hubungi kakitangan perkhidmatan kami, kami mempunyai video pemasangan untuk anda.

***Bolehkah anda memberikan sampel untuk saya membuka pasaran dan kualiti ujian?**

*Ya, kita boleh. Kami boleh memberikan sampel percuma kepada anda.

***Bolehkah anda membayar kos penghantaran?**

Sila hubungi kakitangan perkhidmatan kami.

***Apakah istilah perdagangan anda?**

* Pembayaran: T/T 30% lebih awal, baki sebelum penghantaran.

? Waktu Memimpin Pengeluaran: Dalam masa 7 hari bekerja selepas deposit 30%

? Pelabuhan Penghantaran Fob: Foshan, Guangzhou, Shenzhen