

# Product show


Bahan mentah utama ialah PVC dengan agen tahan ultraviolet dan bahan tambahan. Melalui pengkompaunan saintifik, dibuat dengan teknologi canggih.

1. ringan
2. Perlindungan alam sekitar
3. kalis air dan kalis api
4. Mudah-pemasangan
5. Anti-karat
6. penebat bunyi yang baik

ZXC [kepingan plastik pvc untuk pembekal bumbung](#)



Self-built Factory  
Factory Area **16855m<sup>2</sup>**

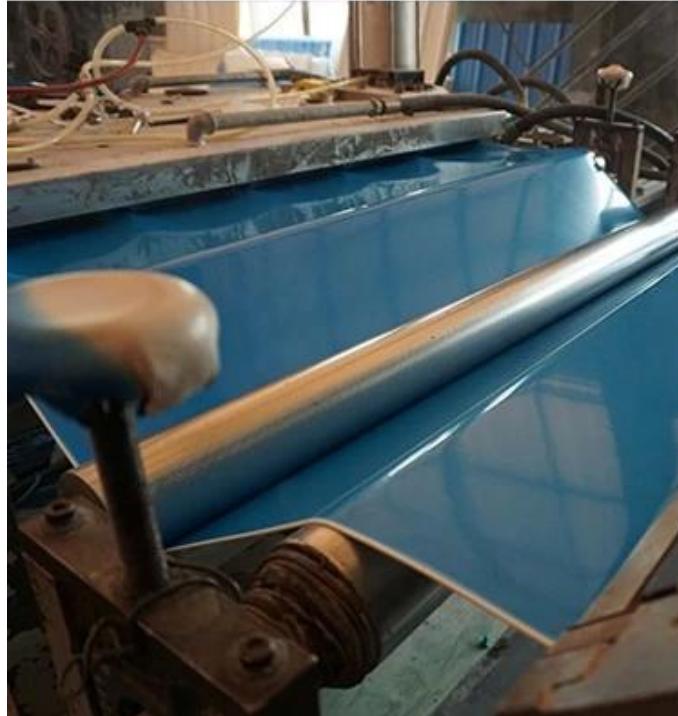



PVC Roofing Sheet  
Maunufature Fpr 15 years




Annual Output 5913000 m<sup>2</sup>

<b>Panjang</b>	1m-12m
<b>Permukaan</b>	Mat
<b>Berat badan</b>	3.0-6.8kg/m
<b>Lebar</b>	1130mm/ 1080mm/ 1050mm/ 980mm/ 930mm
<b>Waranti</b>	30 Tahun
<b>Nombor model</b>	Lembaran Komposit PVC ASA
<b>Fungsi</b>	Penebat, Kalis Api, Penebat Haba, Anti-karat, Rintangan Bentakan
<b>bentuk</b>	gelombang bulat, gelombang bulat besar, gelombang trapezium
<b>Penilaian Perlindungan Kebakaran</b>	B1
<b>Suhu</b>	-10 Darjah Celsius hingga 70 Darjah Celsius
<b>Warna</b>	Putih, Biru, Kelabu, Merah, boleh disesuaikan
<b>Lapisan</b>	2 atau 3 lapisan
<b>Warna Tahan Lama</b>	10 Tahun tiada Luntur

klik [Pemborong bumbung plastik PVC china untuk belajar lebih lagi](#)


# TYPE 840 PIT

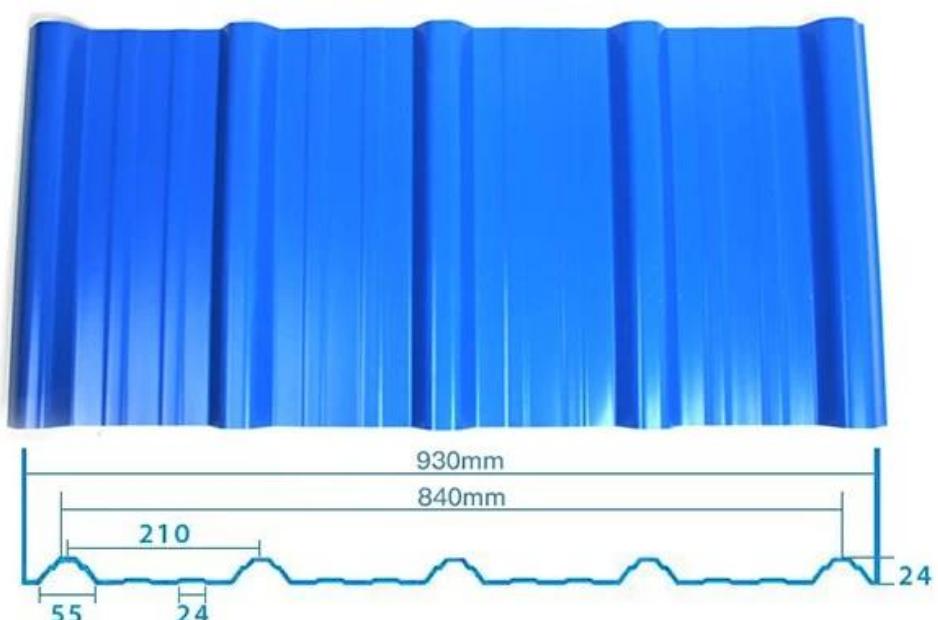


## 900 TYPE HIGH WAVE (FLOWING WATER FAST)



# 980 TYPE HIGH WAVE

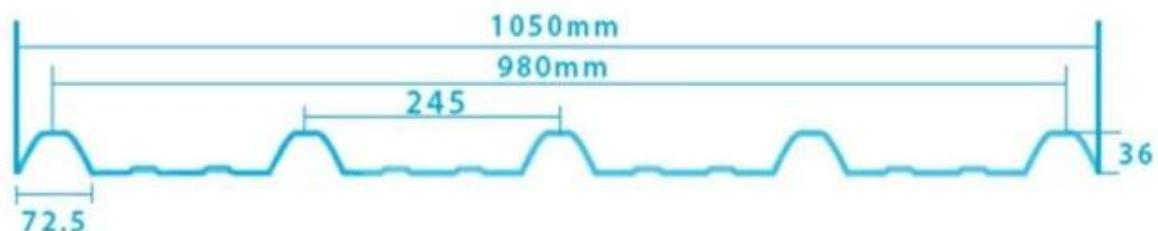

## 1080 TYPE HIGH WAVE (FLOWING WATER FAST)

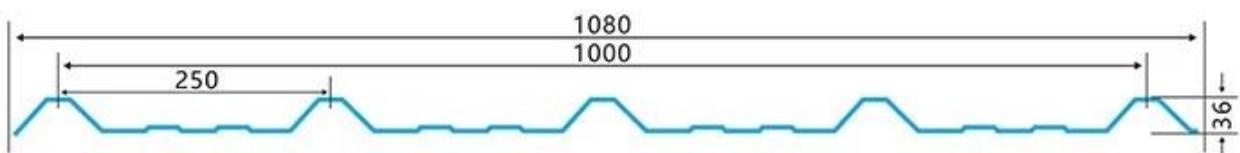



## 1130 TYPE WAVELET





# 1130 TYPE PIT



# 1100 TYPE HIGH CIRCULAR WAVE

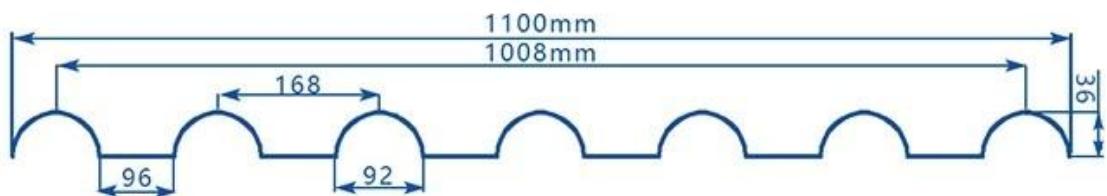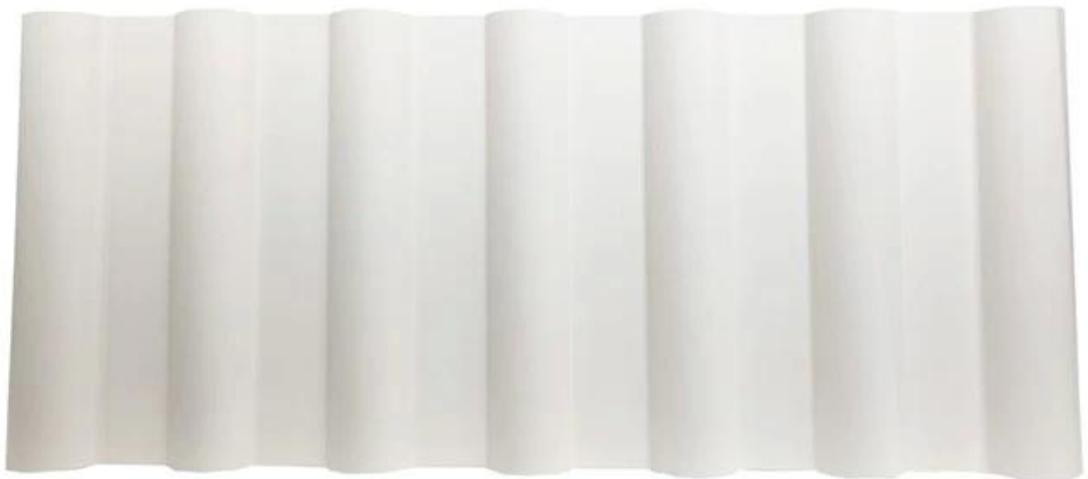

# HOLLOW ROOF TILE

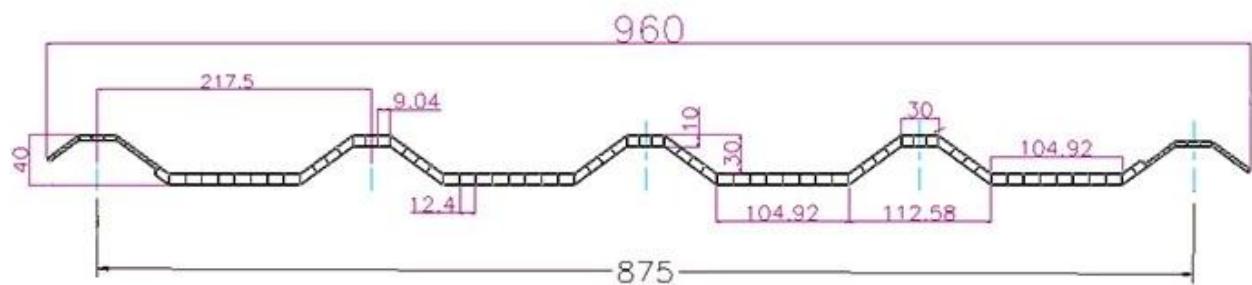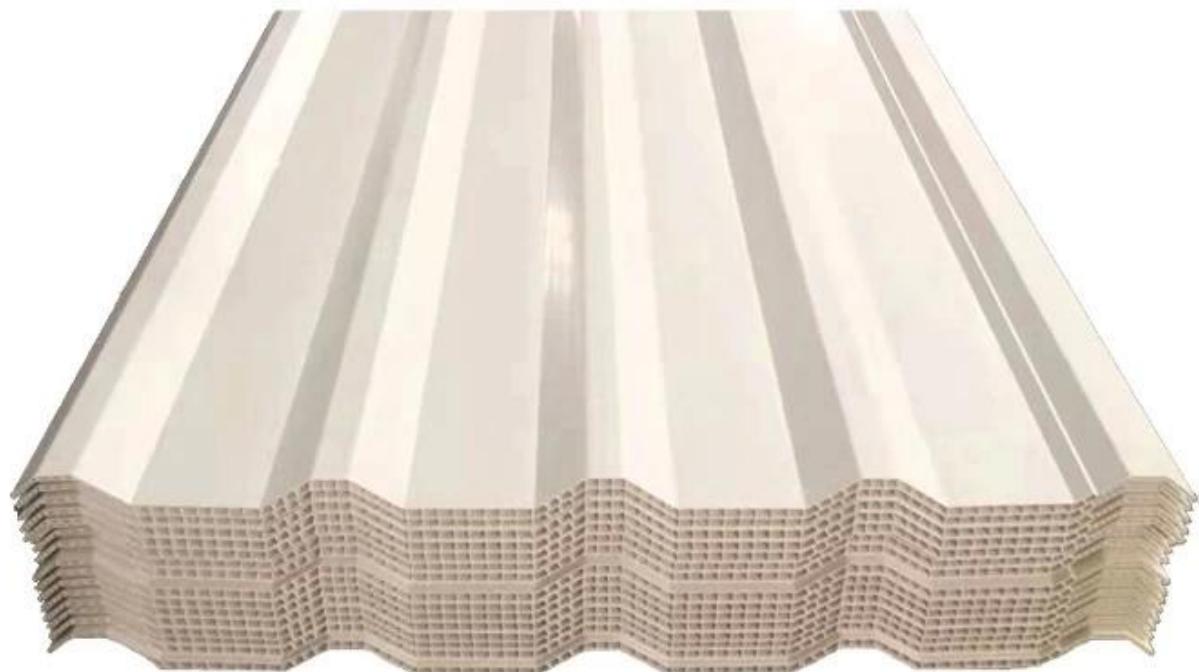

## Our Factory

Zhongxingcheng New Material Co., Ltd. terletak di Kota Foshan, Daerah Nanhai China adalah pengilang yang mengkhusus dalam pengeluaran jubin resin sintetik ASA, jubin komposit anti-karat APVC, jubin anti-karat PVC, sink PVC, plat PVC, Telus Lembaran Bumbung FRP, PVC, jubin lutsinar PC.



There are **130** employee



Delivery time **5 DAYS**  
About **7000m<sup>2</sup>** per cabinet  
About **28m<sup>3</sup>**

All new material  
No recycled material





**Hardness Testing**



**ASA Surface Thickness Test**




**Impact Resistance**



**Tensile Test**



**Measure product thickness  
The product thickness is 2mm**

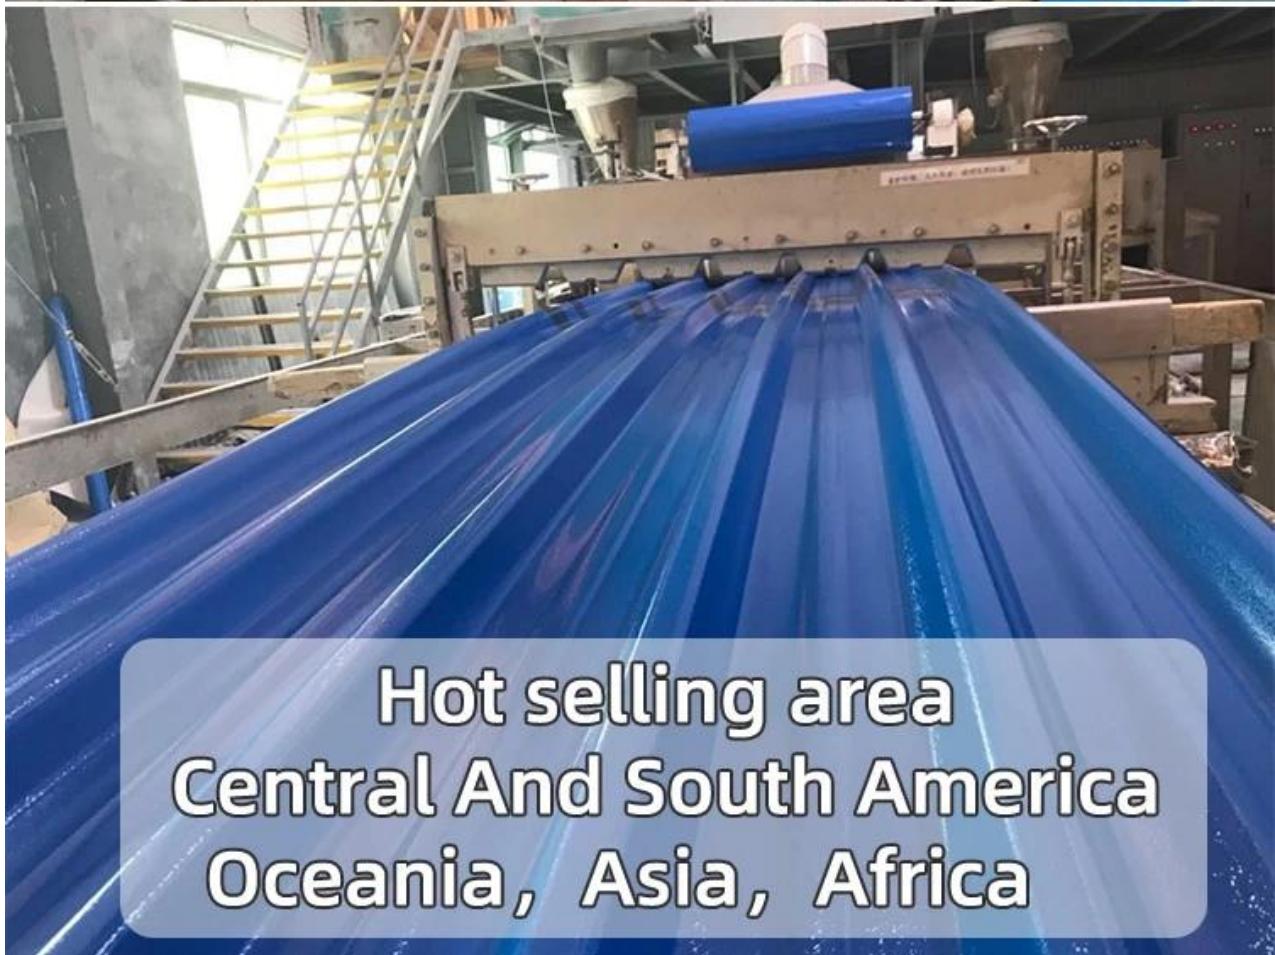

**Hot selling area  
Central And South America  
Oceania, Asia, Africa**

# PVC plastic steel tile PK iron sheet tile



QUALITY



Has superior corrosion resistance

Rusty and perishable



HEAT INSULATION



New material plastic steel tile  
Good thermal insulation

Direct sunlight iron tile  
Temperature too high



COLOUR



ASA PVC ROOF SHEET  
Long lasting and non fading

Severe fading



**Usage scenarios:factories  
farms,chemical plants**



Use scene:greenhouse,  
residence,pergola



Exhibition



## Certificate



**Foshan Supervision Testing Centre of Quality and Metrology Test Report**

Form No. QR-CX049-01/A4/10.0

Product Name	PVC anti-corrosion roofing sheet	Production Date	—
Model Name and Dimension	—	Production Batch	—
Trademark/Grade	—	Sample Number	—
Client	Foshan Zhongxing Cheng New Material Technology Co., Ltd	Test Category	Extracted Test
Client Address	Xiebian Industrial area, Danzao Town, Nanshi District, Foshan City, Guangdong China	Sample Quantity / Method of Sample	3pc(s) delivered sample
Manufacturer (As the Applicant Claimed)	—	Date of Sample Receipt	2017-03-03
Manufacturer Address (As the Applicant Claimed)	—	Sample received by	Li Dongping
Sample Character and State	Normal	Test Date	2017-03-04 ~ 2017-03-17
Test Standards	DB44/T 994-2012 Unplasticized polyvinyl chloride(U-PVC)heat insulation board/tile with a cellular core for building	Test Result refers to Page 2.	
Conclusion	Any copy of test report is invalid without official seal This report is responsible for samples only.		
Remarks			

Approved by: Checked by: Tested by:

**Foshan Supervision Testing Centre of Quality and Metrology Test Report**

Form No. QR-CX049-02/A4/10.0

No.	Item	Unit	Requirement	Result	Venict
1	Appearance	—	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Ends of the tile should be clean without burr.	Confirmed	Pass
2	Width deviation	mm	+5 0	0	Pass
3	Thickness deviation	mm	+0.2	+0.02	Pass
4	Density	kg/m³	—	1720	—
5	Tensile strength	MPa	≥20	31	Pass
6	Elongation at break	%	≥20	32	Pass
7	Falling ball impact (1kg, 1.5m)	—	No perforative cavity or crack after impact test	Confirmed	Pass
8	Acid resistance (H <sub>2</sub> SO <sub>4</sub> 20% w/w, 24h)	—	No obvious color change, no deformation phenomenon.	Confirmed	Pass
9	Alkali resistance (NaOH 20% w/w, 24h)	—	No obvious color change, no deformation phenomenon.	Confirmed	Pass
10	Flexural property (deflection supporting span 800mm, load 40kg)	mm	≤50	12	Pass
(End of the report)					

# Packaging



## FAQ

### \*Adakah anda pengilang atau peniaga?

\*Ya, kami adalah Pengeluar sebenar, terdapat banyak gambar dalam pengenalan syarikat kami jika anda memerlukan produk istimewa lain, kami akan melakukan yang terbaik untuk membantu anda, supaya kami boleh membina hubungan perniagaan jangka panjang.

### \*Bolehkah saya memesan produk dengan saya ingin membuat profil?

\* Sudah tentu anda boleh, kami juga akan menghasilkan produk mengikut permintaan butiran anda.

### \*Bolehkah anda meletakkan jenama syarikat saya pada produk anda?

\*Ya, kami menerima perkhidmatan OEM&ODM. Tetapi kami memerlukan beberapa maklumat tentang syarikat anda.

### \*Bagaimana untuk memasang lembaran bumbung?

\*Sila hubungi kakitangan perkhidmatan kami, kami mempunyai video pemasangan untuk anda.

### \*Bolehkah anda menyediakan sampel untuk saya membuka pasaran dan menguji kualiti?

\*Ya, kami boleh. Kami boleh memberikan sampel percuma kepada anda, Bolehkah anda membayar kos penghantaran? Sila hubungi kakitangan perkhidmatan kami.

### \*Apakah istilah perdagangan anda?

\* Pembayaran: T/T 30% terlebih dahulu, baki sebelum penghantaran.  
• Masa Utama Pengeluaran: Dalam tempoh 7 hari bekerja selepas deposit 30%.  
• Pelabuhan Penghantaran FOB: Foshan, Guangzhou, Shenzhen