



pangalan ng Produkto	PVC anti-corrosion plastic roof sheet
Tatak	ZXC
Lugar ng Pinagmulan	Foshan city,Guangdong province,China(Mainland)
Material	Polyvinyl chloride,Calcium powder,other chemical materials
Guarantee	10 years
Certification	ISO9001 / SGS / CE
Minimum Order Quantity	300 square meter
Oras ng paghatid	1x20GP for 6 days,1x40GP for 7 days
Supply Ability	We have 8 produce lines,about 13500 square meter every day
Kasunduan sa pagbabayad	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,
Pagpapadala	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Package	Pallet or PE bag
Port	Guangzhou / Shenzhen / Foshan
Application	Factory,Warehouse,Farm,Market,Aisle.Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant

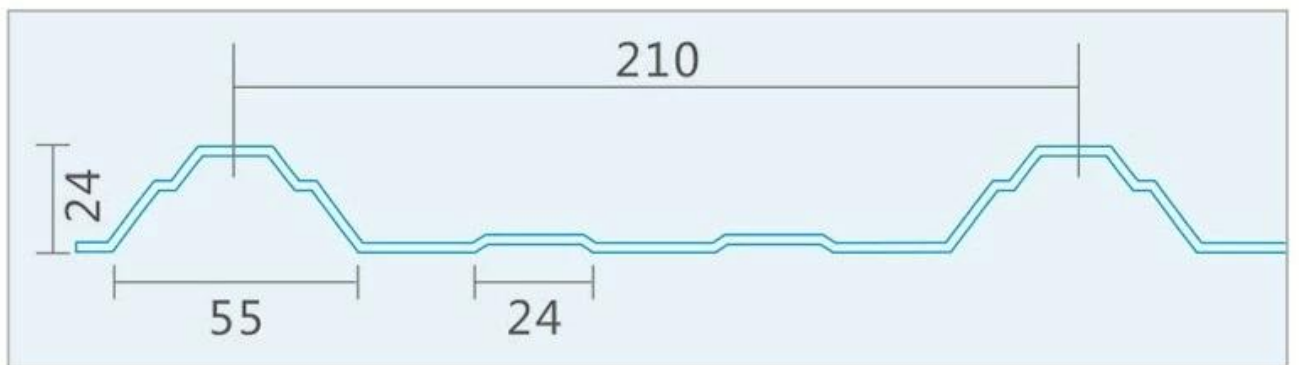


1130mm(Effective Width:1050mm)

Model Number	#1130-210-24
Type	Trapezoid type
Pangkalahatang lapad	1130mm
Effective Width	1050mm

Thickness	1.3mm / 1.5mm / 1.8mm / 2.0mm / 2.3mm / 2.5mm / 2.8mm / 3.0mm
Length	5.8meter / 11.8meter / Customized
Kulay	White / Blue / Green / Red / Customized
Wave Spacing	210mm
Wave Height	24mm
Layer	One layer / Two layers / Three layers

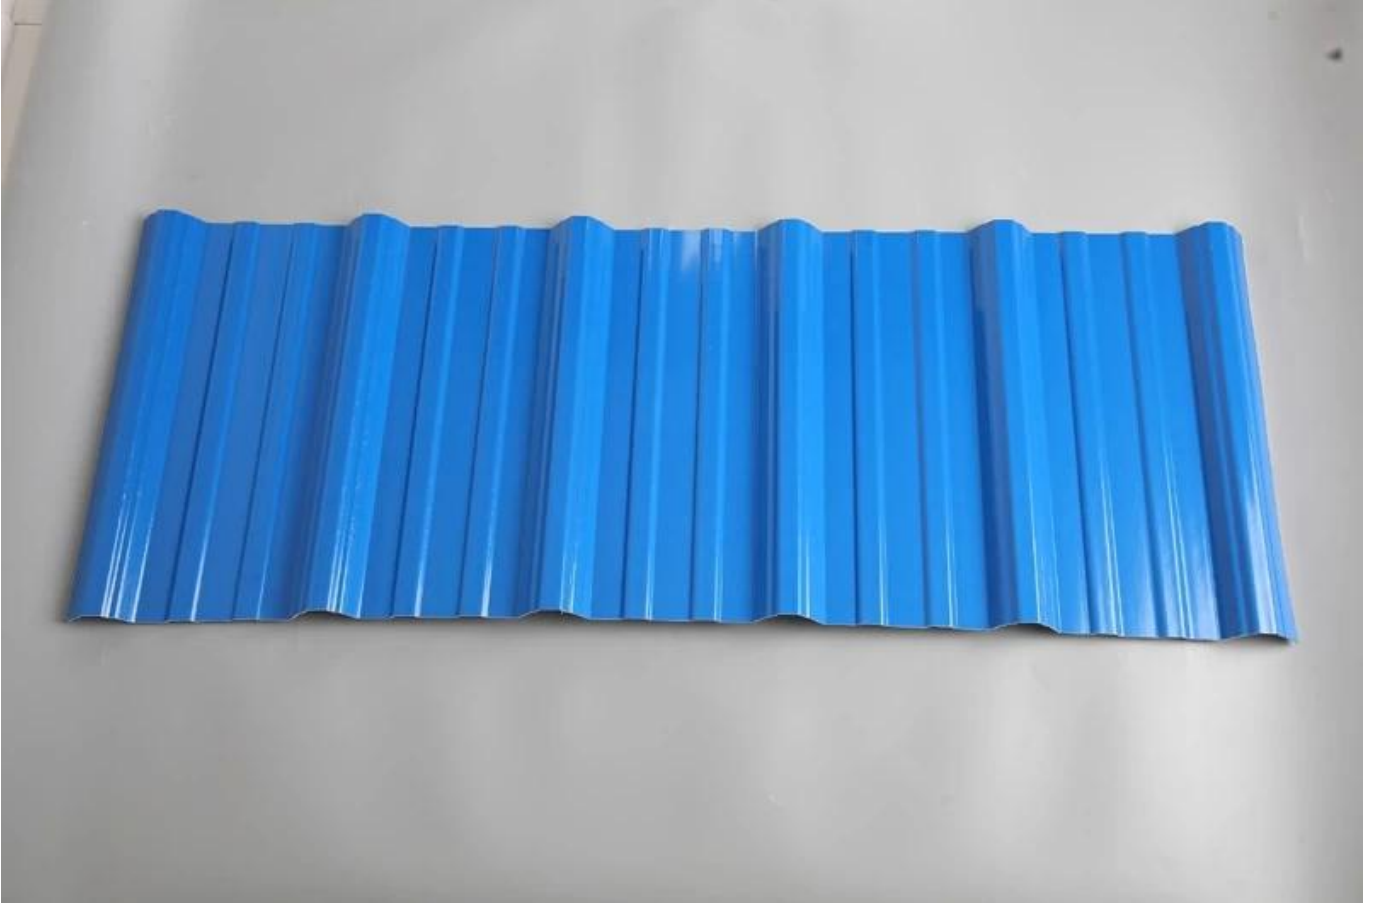



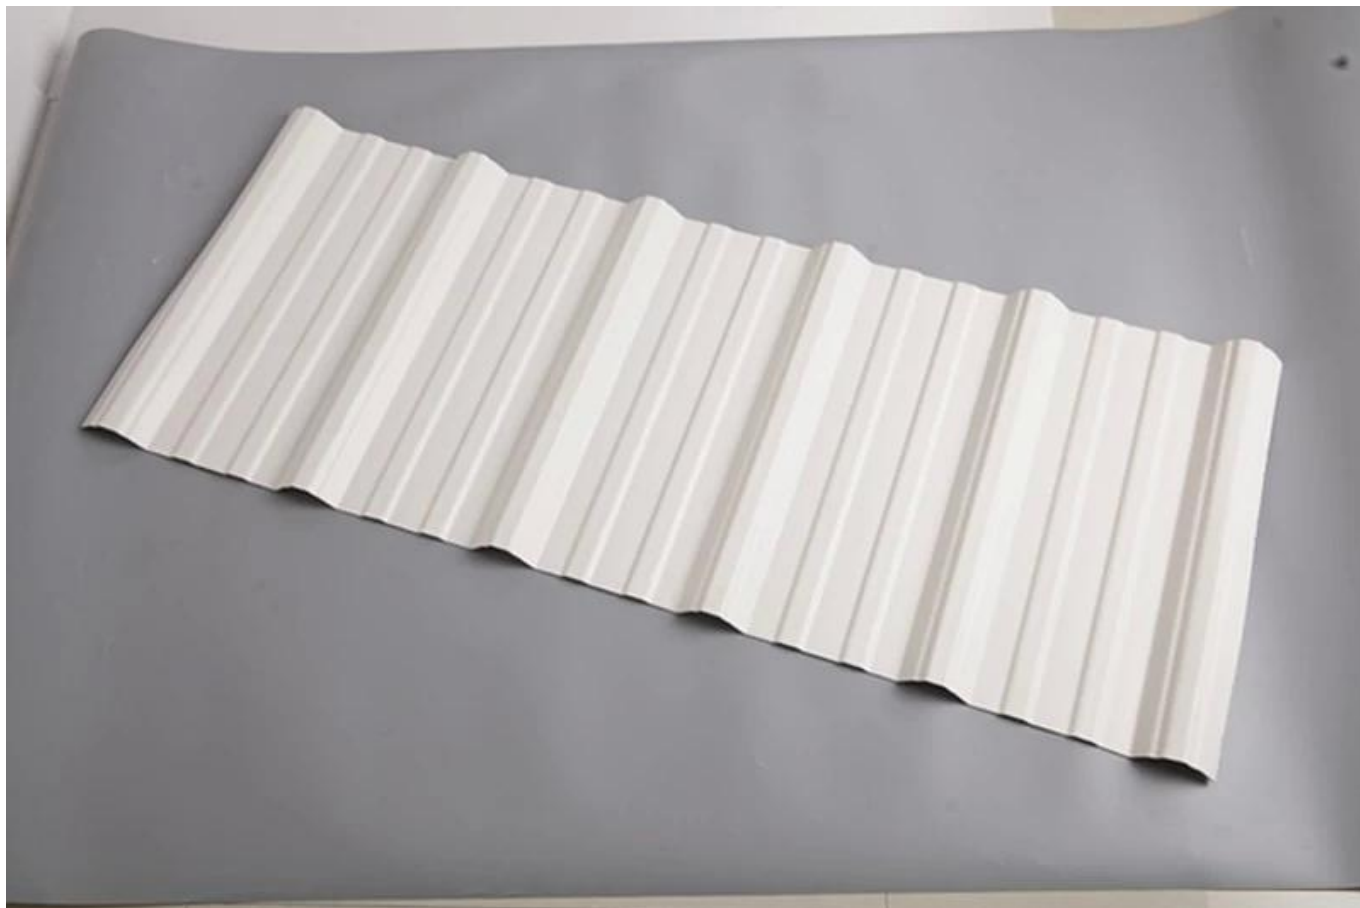

Feature

• Anti-corrosion

• ZhongXingCheng PVC plastic roofing sheet in the long term against acid, alkali, salt and other corrosive chemicals. Experiments prove that: In the salt, alkali and 60% following a 24-hour soaking in acid, no chemical reaction. Very suitable for acid rainprone areas and coastal use, the effect was particularly significant.

• Hindi nababasa

• ZhongXingCheng PVC plastic roofing sheet's surface materials is co-extruded in ultra-weather surface layer resin to ensure the durability of products (for 15 years in quality assurance).

• Fire Resistance

• ZhongXingCheng PVC plastic roofing sheet is a flame retardant materials, through the national fire authority of the department according to GB8624-2006 standards for testing, fire safety performance \geq B1 grade.

• Heat Insulation

• ZhongXingCheng PVC plastic roofing sheet's thermal conductivity coefficient is 0.325w/mk, clay tile is about 1 / 310, cement tile 1 / 5, 0.5mm thick color steel tile 1 / 2000. Therefore, without considering the case of insulation layer increases, the PVC plastic roofing sheet can still achieve the best thermal insulation properties.

• Sound Insulation

• The tests prove that: in suffering heavy rain, high winds the impact of outside noise, ZhongXingCheng PVC plastic roofing sheet has a good absorption of the noise effect, noise down 30dB than color steel tile.

