

ZXC [ASA synthetic resin roof tile](#), Mga accessory sa bubong ng sintetikong dagta na nakatagilid na tagaytay na baldosa sa ulo ng pakyawan



Matatagpuan ang Zhongxingcheng New Material Co., Ltd. sa Foshan City, Nanhai District China ay isang tagagawa na dalubhasa sa paggawa ng ASA synthetic resin tile, APVC anti-corrosion composite tile, PVC anti-corrosion tile, PVC sink, PVC plate, Transparent FRP Roof Sheet, PVC, PC transparent tile.

ABOUT US



QUALITY, INNOVATION, STRUGGLE, WIN-WIN

we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



PRODUCTION PROCESS



Raw Materials

1



Extrusion

2



Compression Molding

3



Cutting

4



Finished Product

5



Inspection

6


CERTIFICATE

ZHONGXINGCHENG

has more than 10 years experience in roof tile.



resin roof tile accessories

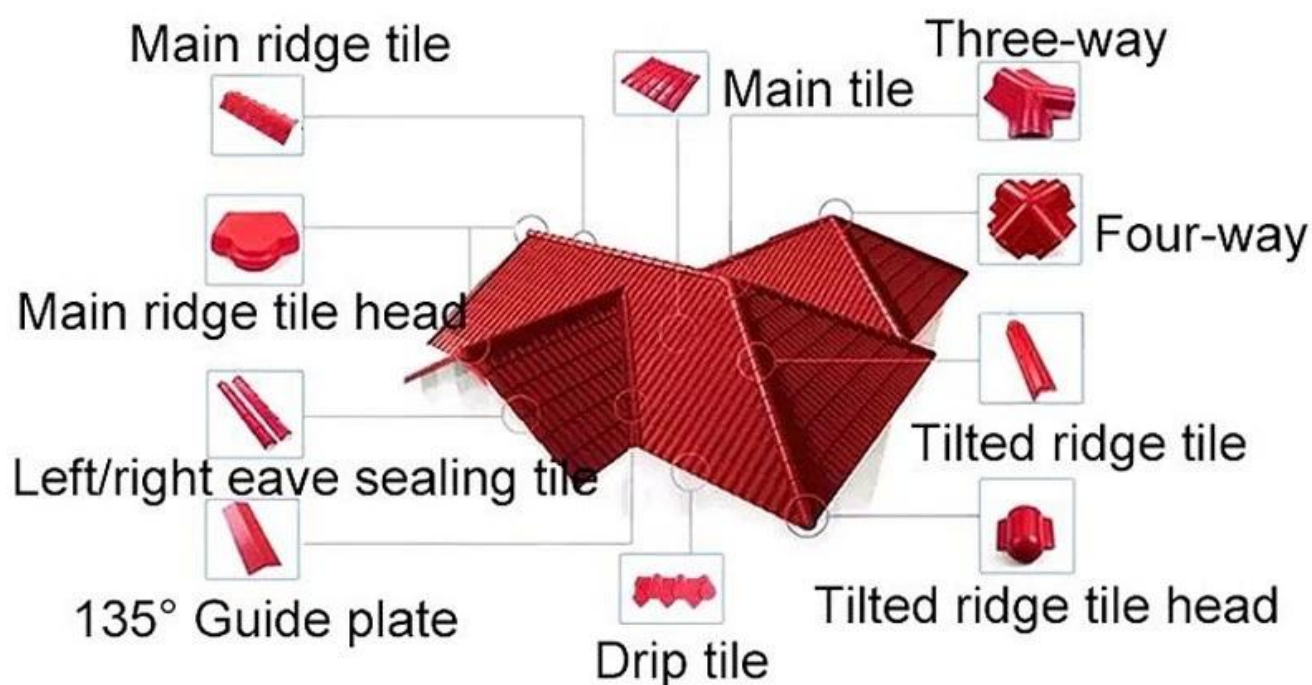

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory



Engineering case



Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no visible crack or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and tolerance on warpage.	Confirmed	Pass
2	Walk resistance	mm	≤10	8	Pass
3	Thickness deviation	mm	±0.2	0.15	Pass
4	Density	kg/m ³	---	1750	---
5	Break strength	MPa	≥1.20	1.35	Pass
6	Flexural strength	%	≥1.20	1.35	Pass
7	Water absorption (30°C)	---	No pollution marks or water absorption on the surface.	Confirmed	Pass
8	Acid resistance (20% H ₂ SO ₄ , 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
9	Acid resistance (20% HCl, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Alkali resistance (5% NaOH, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
11	Change index	%	≤0.1	0.05	Pass

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass
2	Surface layer thickness	mm	≥0.15	0.18	Pass
3	Tensile strength	MPa	≥1.20	1.35	Pass
4	Flexural strength	%	≥1.20	1.35	Pass
5	Flexural strength	MPa	≥1.20	1.35	Pass
6	Flexural strength	MPa	≥1.20	1.35	Pass
7	Density	kg/m ³	---	1750	---
8	Water absorption (30°C)	---	No pollution marks or water absorption on the surface.	Confirmed	Pass
9	Acid resistance (20% H ₂ SO ₄ , 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Acid resistance (20% HCl, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
11	Alkali resistance (5% NaOH, 24h)	---	No obvious color change or delamination phenomenon.	Confirmed	Pass
12	Change index	%	≤0.1	0.05	Pass
13	Water absorption (30°C)	---	No pollution marks or water absorption on the surface.	Confirmed	Pass
14	Water absorption (30°C)	---	No pollution marks or water absorption on the surface.	Confirmed	Pass
15	Water absorption (30°C)	---	No pollution marks or water absorption on the surface.	Confirmed	Pass



Packaging



Tampok:

1. Napakahusay Anti-corrosion Pagganap
2. Mabuti Hindi nababasa Pagganap
3. Sunog Paglaban
4. Init pagkakabukod
5. Tunog insulation
6. Panahon kabilisan, pagtanda paglaban

Package: Hubad o pamantayan i-export pakete

FAQ

*** Ikaw ba ay tagagawa o mangangalakal?**

* Oo, tayo ay totoo, maraming larawan sa pagpapakilala ng aming kumpanya. kung kailangan mo ng iba pang espesyal na produkto, gagawin namin ang aming makakaya upang matulungan ka, upang makabuo kami ng pangmatagalang relasyon sa negosyo.

*** Maaari ba akong mag-order ng produkto gamit ang gusto kong i-profile?**

* Syempre kaya mo, gagawa din kami ng mga produkto ayon sa iyong mga kahilingan sa detalye.

*** Maaari mo bang ilagay ang tatak ng aking kumpanya sa iyong mga produkto?**

* Oo, tumatanggap kami ng serbisyo ng OEM at ODM. Ngunit kailangan namin ng ilang impormasyon tungkol sa iyong kumpanya.

*** Paano i-install ang roofing sheet?**

* Mangyaring makipag-ugnayan sa aming kawani ng serbisyo, mayroon kaming video sa pag-install para sa iyo.

*** Maaari ka bang magbigay ng mga sample para mabuksan ko ang merkado at subukan kalidad?**

* Oo, kaya namin. Maaari kaming magbigay ng mga libreng sample sa iyo, Maaari mo bang bayaran ang gastos sa pagpapadala? Mangyaring makipag-ugnayan sa aming mga tauhan ng serbisyo.

*** Ano ang iyong termino sa kalakalan?**

* Pagbabayad: T/T 30% nang maaga, balanse bago ipadala.

? Production Lead Time: Sa loob ng 7 araw ng trabaho pagkatapos ng 30% na deposito

? FOB Shipping Port: Foshan, Guangzhou, Shenzhen