


pangalan ng Produkto	ZXC round wave and trapezoid PVC roofing sheet in different colors
Tatak	ZXC
Lugar ng Pinagmulan	Foshan city,Guangdong province,China(Mainland)
Material	Polyvinyl chloride,Calcium powder,other chemical materials
Guarantee	10 years
Certification	ISO9001 / SGS / CE
Minimum Order Quantity	300 square meter
Oras ng paghatid	1x20GP for 6 days,1x40GP for 7 days
Supply Ability	We have 8 produce lines,about 13500 square meter every day
Kasunduan sa pagbabayad	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,
Pagpapadala	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Package	Pallet or PE bag
Port	Guangzhou / Shenzhen / Foshan
Application	Factory,Warehouse,Farm,Market,Aisle.Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant




**1130mm(Effective Width:1050mm)**

Model Number	#1130-210-24
Type	Trapezoid type
Pangalahatang lapad	1130mm
Effective Width	1050mm

Thickness	1.3mm / 1.5mm / 1.8mm / 2.0mm / 2.3mm / 2.5mm / 2.8mm / 3.0mm
Length	5.8meter / 11.8meter / Customized
Kulay	White / Blue / Green / Red / Customized
Wave Spacing	210mm
Wave Height	24mm
Layer	One layer / Two layers / Three layers

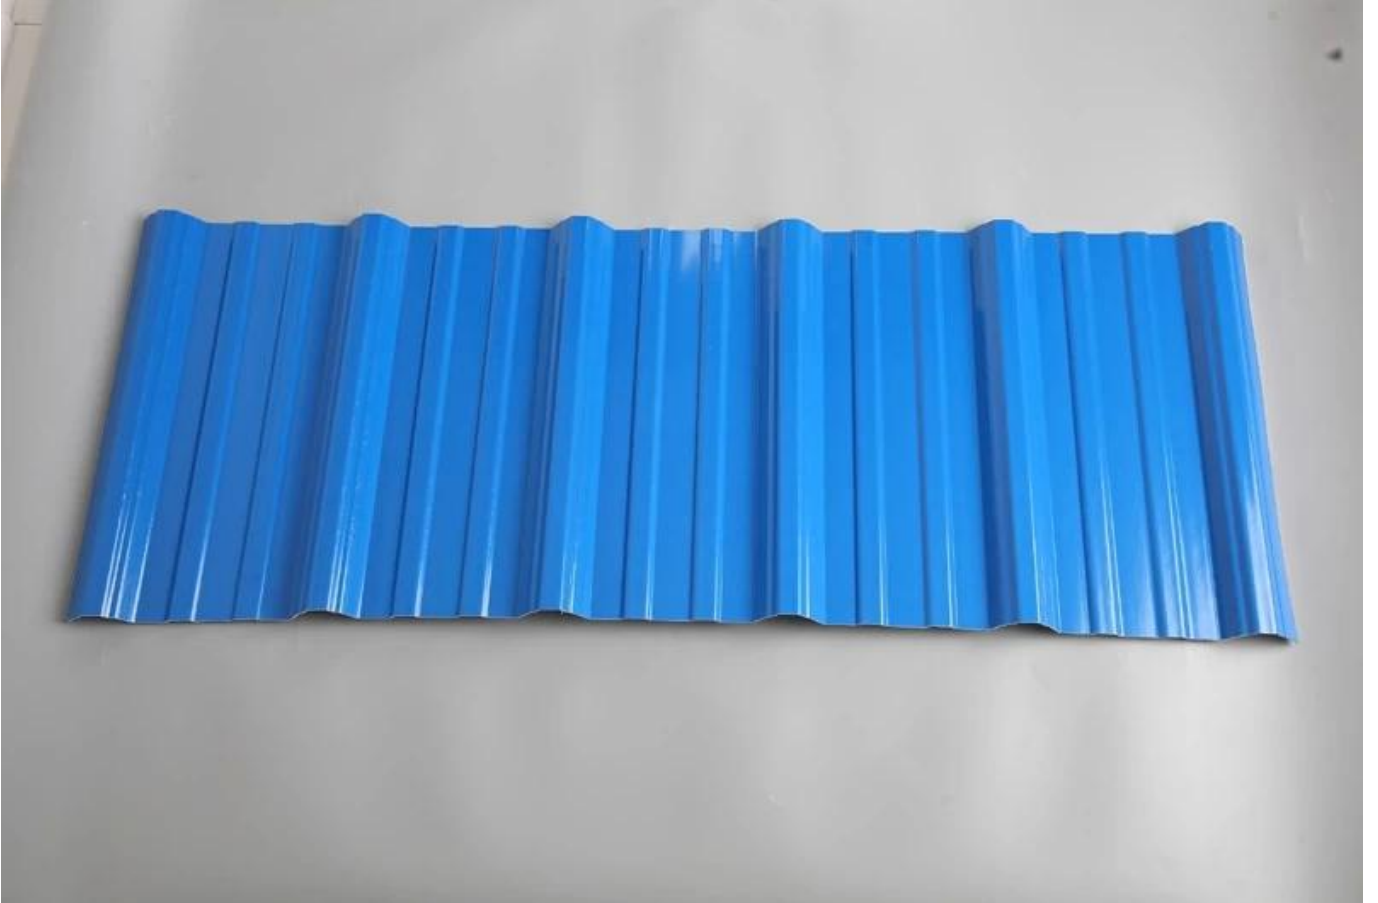

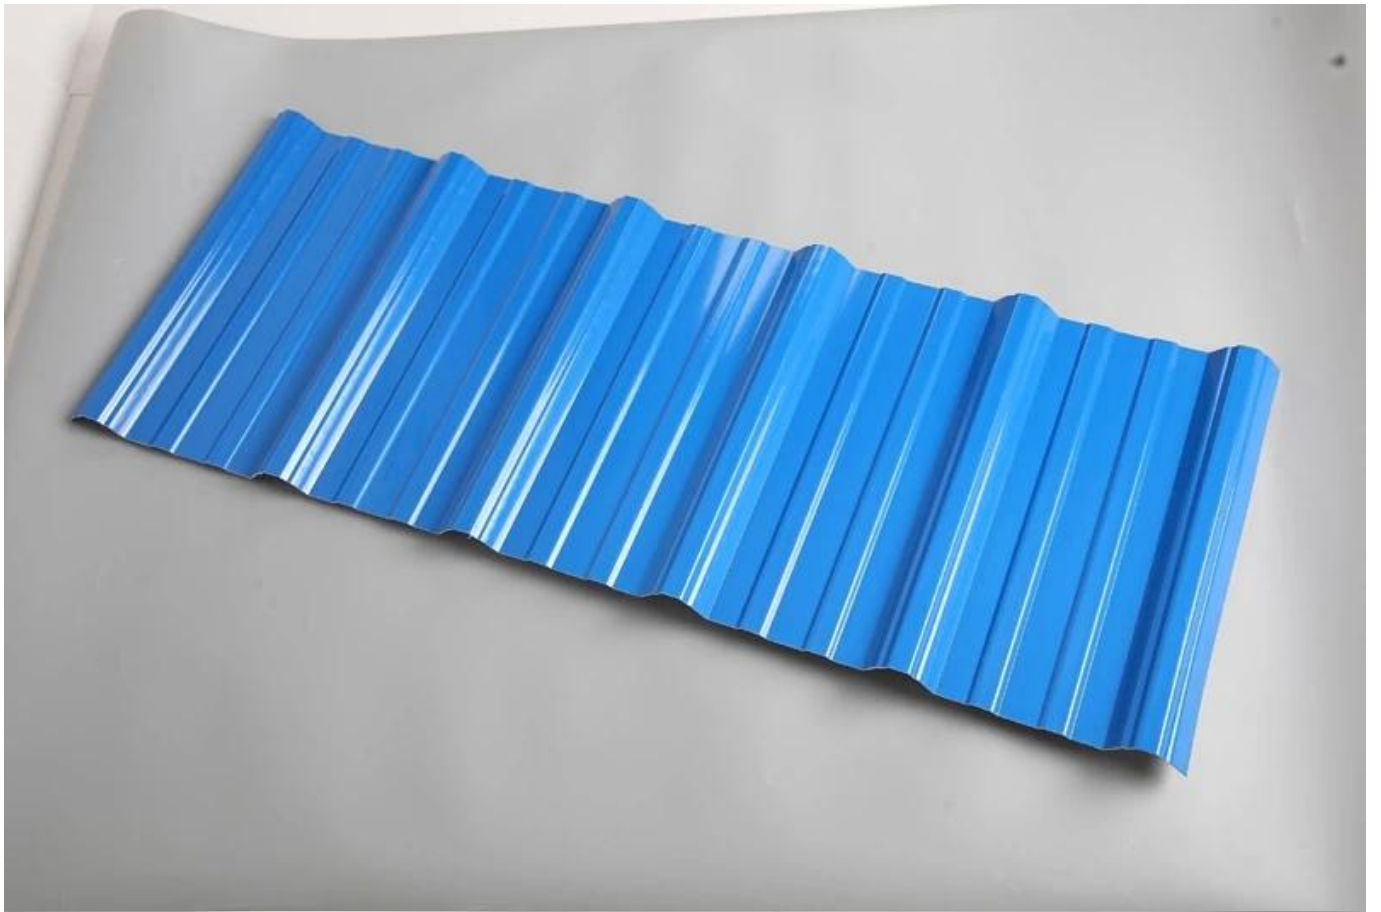



## **Feature**

### **• Anti-corrosion**

• ZhongXingCheng PVC plastic roofing sheet in the long term against acid, alkali, salt and other corrosive chemicals. Experiments prove that: In the salt, alkali and 60% following a 24-hour soaking in acid, no chemical reaction. Very suitable for acid rainprone areas and coastal use, the effect was particularly significant.

### **• Hindi nababasa**

• ZhongXingCheng PVC plastic roofing sheet's surface materials is co-extruded in ultra-weather surface layer resin to ensure the durability of products (for 15 years in quality assurance).

### **• Fire Resistance**

• ZhongXingCheng PVC plastic roofing sheet is a flame retardant materials, through the national fire authority of the department according to GB8624-2006 standards for testing, fire safety performance  $\geq$  B1 grade.

### **• Heat Insulation**

• ZhongXingCheng PVC plastic roofing sheet's thermal conductivity coefficient is 0.325w/mk, clay tile is about 1 / 310, cement tile 1 / 5, 0.5mm thick color steel tile 1 / 2000. Therefore, without considering the case of insulation layer increases, the PVC plastic roofing sheet can still achieve the best thermal insulation properties.

### **• Sound Insulation**

• The tests prove that: in suffering heavy rain, high winds the impact of outside noise, ZhongXingCheng PVC plastic roofing sheet has a good absorption of the noise effect, noise down 30dB than color steel tile.

