

Product show



1. A variety of raw materials by a certain percentage mixing, into the hopper



2. The mixed raw materials are pre-formed and heated to become flat tiles





3. Then through the mold pressure, elastic the molding, cooling, through the traction machine slowly introduced



4. To achieve the length of customer needs cut off. after artificial out



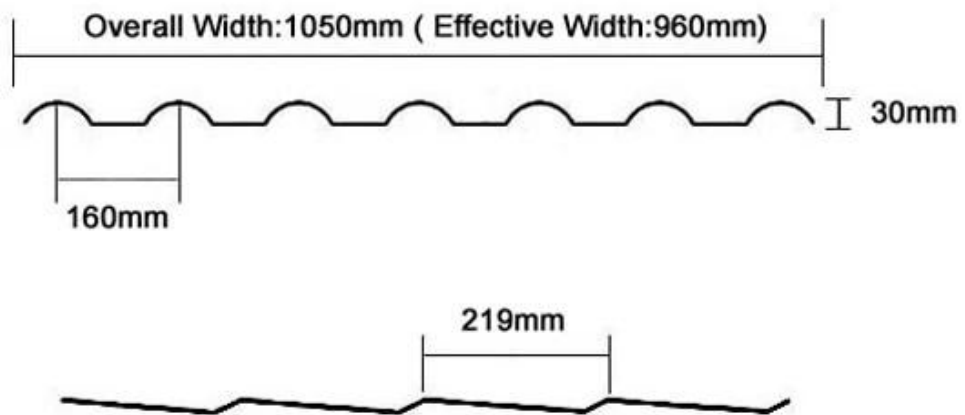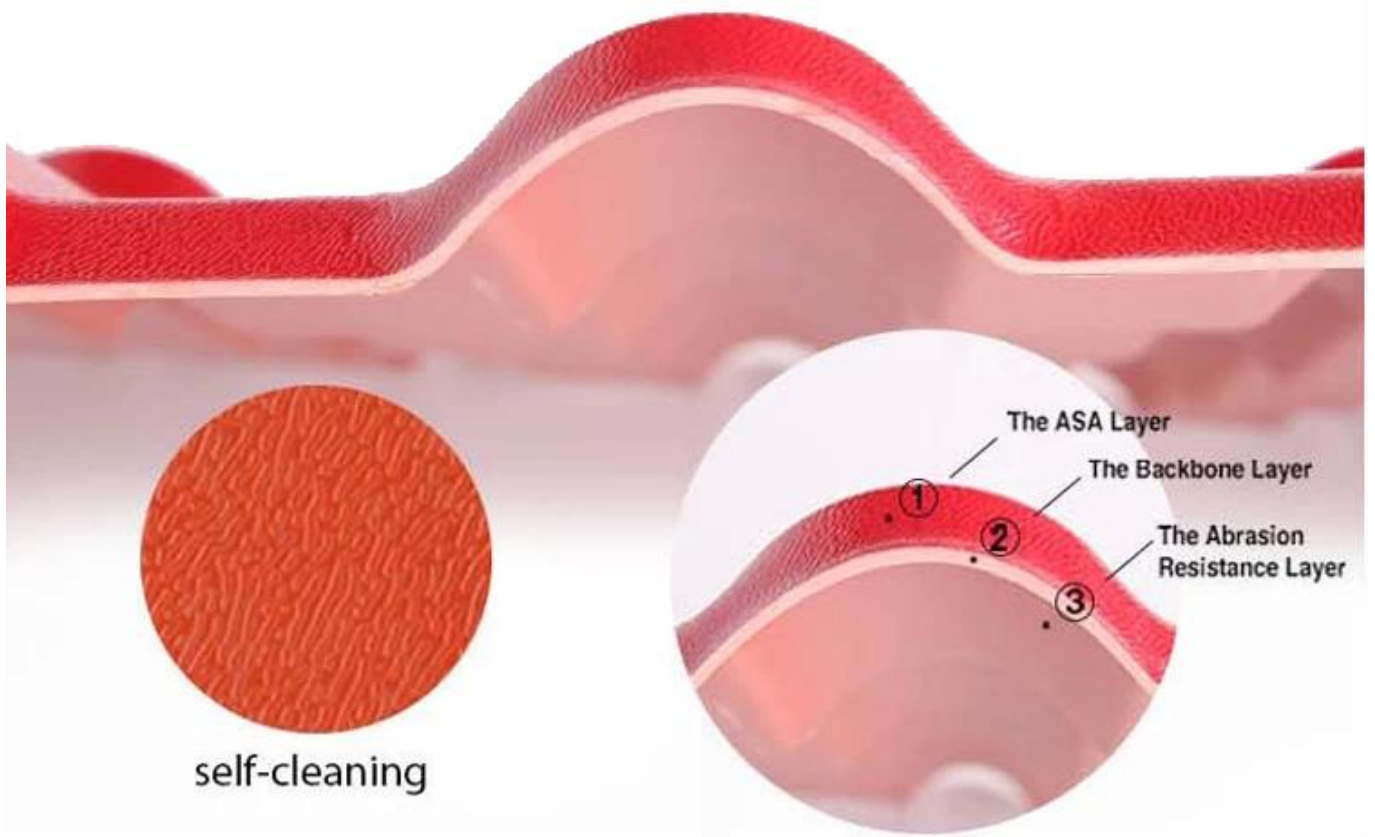

Purplish Red



Brick Red



Sky Blue














Black



Dark Green

| | | | | | |
|-------------------------|-----------------|---|-------|-------|-------|
| Product name | | ASA Synthetic Resin Roof Tile | | | |
| Material | | ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride) | | | |
| Type | | Spanish Style | | | |
| Overall Width | | 1050mm | | | |
| Effective Width | | 960mm | | | |
| Thickness | | 2.3mm—3.0mm | | | |
| Length | | Customized(According to the size of container) | | | |
| Color | | Customized | | | |
| Purlin Spacing | | 660mm | | | |
| Thickness | | 2.3mm | 2.5mm | 2.8mm | 3.0mm |
| Weight (kg/SQM) | | 4.6 | 5.0 | 5.6 | 6.0 |
| Container Load capacity | 20 GP (21 Tons) | 4500 | 4200 | 3750 | 3500 |
| | 40 GP (26 Tons) | 5600 | 5200 | 4600 | 4300 |
| Feature | | 1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance | | | |
| Package | | Nude or standard export package | | | |

| Item No. | Name | Picture | Item No. | Name | Picture |
|----------|--------------------------|---|----------|--------------------------------|---|
| 1 | ASA Synthetic Resin Tile |  | 7 | Main Ridge Tile Head |  |
| 2 | Main Ridge Tile |  | | Main Ridge Turnup |  |
| 3 | Tilted Ridge Tile |  | 8 | Four-way |  |
| 4 | Tilted Ridge Tile Head |  | 9 | Left / Right Eave Sealing Tile |  |
| | Tilted Ridge Turnup |  | 10 | Guide Plate Tile |  |
| 5 | Modern eave drip tile |  | 11 | Vertical Wall Flashing Tile |  |
| | Antique eave drip tile |  | 12 | Screw And Hat |  |
| 6 | Three-way |  | | | |

Accessories





Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

| No. | Item | Unit | Requirement | Result | Verdict |
|-----|---------------------|-------------------|--|-----------|-----------|
| 1 | Appearance | — | The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface. | Confirmed | Pass |
| 2 | Wall thickness | mm | 0.2 | 0.2 | Pass |
| 3 | Thickness deviation | mm | ±0.02 | ±0.02 | Pass |
| 4 | Density | g/cm ³ | — | 1.170 | — |
| 5 | Tensile strength | MPa | ≥1.0 | 1.1 | Pass |
| 6 | Elongation at break | % | ≥1.0 | 1.1 | Pass |
| 7 | Falling ball impact | J/kg | — | — | Confirmed |
| 8 | Heat resistance | — | — | — | Confirmed |
| 9 | Flammability | — | — | — | Confirmed |
| 10 | Flammability | — | — | — | Confirmed |
| 11 | Flammability | — | — | — | Confirmed |
| 12 | Flammability | — | — | — | Confirmed |
| 13 | Flammability | — | — | — | Confirmed |
| 14 | Flammability | — | — | — | Confirmed |
| 15 | Flammability | — | — | — | Confirmed |
| 16 | Flammability | — | — | — | Confirmed |
| 17 | Flammability | — | — | — | Confirmed |
| 18 | Flammability | — | — | — | Confirmed |
| 19 | Flammability | — | — | — | Confirmed |
| 20 | Flammability | — | — | — | Confirmed |

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

| No. | Item | Unit | Requirement | Result | Verdict |
|-----|---------------------|-------------------|--|-----------|-----------|
| 1 | Appearance | — | The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface. | Confirmed | Pass |
| 2 | Surface roughness | mm | 0.1 | 0.1 | Pass |
| 3 | Tensile strength | MPa | ≥1.0 | 1.1 | Pass |
| 4 | Elongation at break | % | ≥1.0 | 1.1 | Pass |
| 5 | Flexural strength | MPa | ≥1.0 | 1.1 | Pass |
| 6 | Flexural modulus | MPa | ≥1.0 | 1.1 | Pass |
| 7 | Density | g/cm ³ | — | 1.170 | — |
| 8 | Heat resistance | — | — | — | Confirmed |
| 9 | Flammability | — | — | — | Confirmed |
| 10 | Flammability | — | — | — | Confirmed |
| 11 | Flammability | — | — | — | Confirmed |
| 12 | Flammability | — | — | — | Confirmed |
| 13 | Flammability | — | — | — | Confirmed |
| 14 | Flammability | — | — | — | Confirmed |
| 15 | Flammability | — | — | — | Confirmed |
| 16 | Flammability | — | — | — | Confirmed |
| 17 | Flammability | — | — | — | Confirmed |
| 18 | Flammability | — | — | — | Confirmed |
| 19 | Flammability | — | — | — | Confirmed |
| 20 | Flammability | — | — | — | Confirmed |



Our Factory





Our Customer



Packaging



FAQ

***Are you manufacturer or trader?**

***Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.**

***Can I order the product with i want to profile?**

***Of course you can, also we will produce the products according to your detail requests.**

***Can you put my company's brand on your products?**

***Yes, we accept OEM&ODM service. But we need some information about your company.**

***How to install the roofing sheet?**

***Please contact our service staff, we have installation video for you.**

***Can you provide samples for me to open the market and test quality?**

***Yes, we can. We can provide free samples to you, Could you pay the shipping cost? Please contact our service staff.**

***What is your trade term?**

*** Payment: T/T 30% in advance, balance before shipment.**

- Production Lead Time: Within 7 working days after 30% deposit**
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen**