

# Parameters

本機は、標準的な電源電圧（100V）で動作し、標準的な電源周波数（50/60Hz）で動作します。電源電圧や電源周波数が異なる地域で使用される場合は、電源アダプタを別途購入する必要があります。また、本機は、標準的な電源ケーブル（電源コード）を使用する必要があります。電源ケーブルの長さや仕様は、電源アダプタの仕様書をご覧ください。

電源電圧:	100V
電源周波数:	ZXC
電源ケーブル:	標準的な電源ケーブル
筐体材質:	PVC
筐体色:	黒色
筐体サイズ:	標準的な筐体サイズ
筐体重量:	標準的な筐体重量
筐体寸法:	14 mm x 16 mm / 18 mm x 20 mm / 25 mm x 28 mm.
筐体材質:	標準的な筐体材質
筐体色:	標準的な筐体色 5 色
筐体サイズ:	標準的な筐体サイズ
筐体重量:	標準的な筐体重量
筐体寸法:	標準的な筐体寸法
筐体材質:	標準的な筐体材質
筐体色:	標準的な筐体色

# QUALITY RAIN GUTTER

Made of PVC, resistant to pressure and corrosion, durable

Feeding gutter | planting gutter | incubation gutter | rain gutter



Trust comes from quality

## PRODUCT FEATURE DISPLAY



01

**new raw material**

Using high-quality raw materials, no recycled materials, green environmental protection, long life



02

**Thickened load-bearing**

PVC material has strong bending resistance and impact toughness




03

**Resistance corrosion**

Long-term resistance to chemical substances such as acid, alkali and salt corrosion

Trust comes from quality

# Product Information

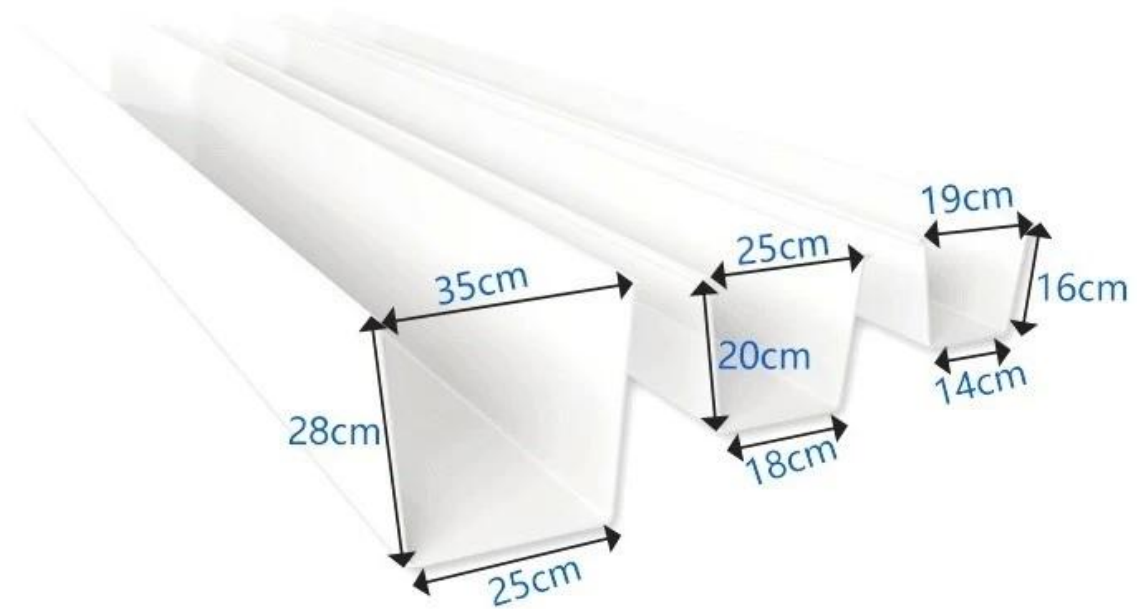

\* □□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□	□□□□□□□□□□	□□□□□□□□□□□□
□□□□□□□□□□□□	□□□□□□□□14□□.□□□16□□. □□□□□□□□19cm.□□□2.5mm	□□□□□□□ □□□□□□□□□□ □□□□□□□□□□
□□□□□□□□□□	□□□□□□□□18□□.□□□20□□. □□□□□□□□25cm.□□□2.8mm	
□□□□□□□□□□□□	□□□□□□□□25□□.□□□28□□. □□□□□□□□35cm.□□□3.8mm	

□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□

## Accessories

Trust comes from quality

# RAIN GUTTER ACCESSORIES

Complete accessories, selected quality



Joiner



End cap



90° angle



Drop outlet



Drain end cap

Advantage

# IT'S ALL RAIN GUTTERS, WHY ARE WE MORE PROFESSIONAL?

## PRODUCT COMPARISON

### ZHONGXINGCHENG RAIN GUTTERS



### OTHER PEOPLE'S FACTORY GUTTER RAIN GUTTER



2.5mm thickened small sink

4.5mm thickened large sink



Standard 2.5,  
maximum thickness 4.5



160 gutter with a thickness of 2.2m



The thickness is only 2.2,  
which is not durable



New imported raw materials



Recycled material, low cost



Excellent workmanship,  
not afraid of trampling



Cut corners and  
be easily damaged

Trust comes from quality




## GLASS GLUE PORTABLE INSTALLATION

Quick installation in 2 minutes  
Compared with traditional fixed rivets,  
it saves time, effort and worry



Trust comes from quality

# INSTALLATION INSTRUCTIONS

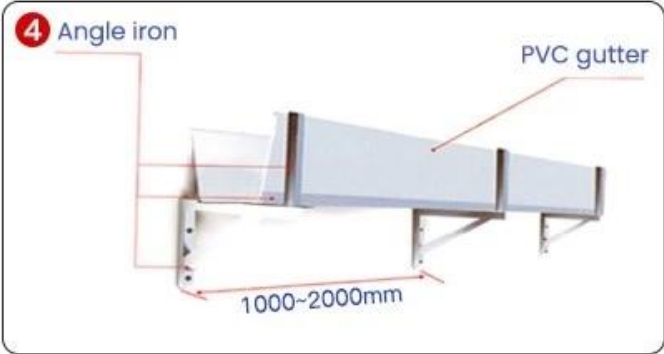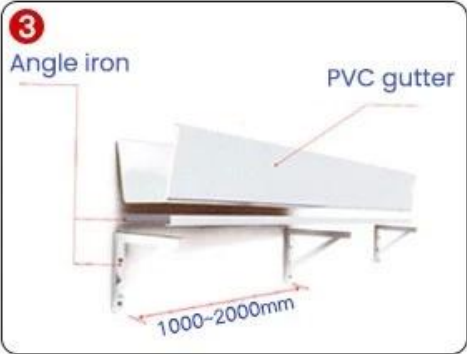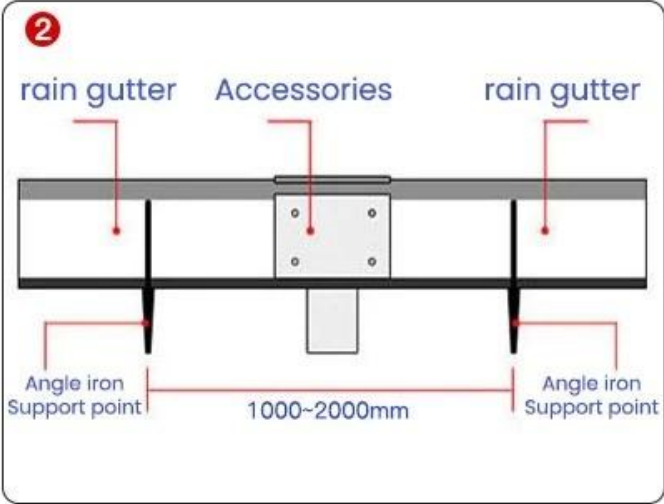

1. 安裝前請先檢查所有零件是否齊全，並請將安裝位置之屋頂清理乾淨，確保屋頂坡度在 1.5-1.8 公分之間，以利排水。

2. 將 PVC 排水槽安裝在屋頂上，並用螺絲固定。

3. 安裝排水口，並確保排水口與屋頂坡度一致。

4. 安裝角鐵，並確保角鐵與屋頂坡度一致，且每隔 1000-2000mm 安裝一個。

5. 安裝完成後，請檢查排水槽是否安裝正確，並請定期檢查排水槽是否堵塞。



# Project

Trust comes from quality

# Real case, real power

Selected engineering cases







Trust comes from quality

# THE PRODUCT IS VERY VERSATILE

Versatility leads to creative life



Family daily use



The villa receives water



Breeding gutters



Factory drainage



Agricultural irrigation



Planting hydroponics

Our Factory

# 12 YEARS OF FOCUS ON GUTTER TECHNOLOGY

...

Trust comes from quality

## SOURCE MANUFACTURER QUALITY ASSURANCE

"Win tomorrow with the trust of quality"



**12years** | **34840m<sup>2</sup>** | **25,000m**  
of industry experience | meters of factory area | average daily output

# Certificate

Trust comes from quality

# AUTHORITATIVE ORGANIZATION INSPECTION

There is a certificate and guarantee and only with strength can you rest assured





# FAQ

**1.Q:** 如何選擇合適的管徑和壁厚？

A: 根據設計要求，選擇合適的管徑和壁厚。PVC 管、PPR 管、PE 管等。

**2.Q:** 如何選擇合適的管材？

A: 根據設計要求，選擇合適的管材。Foshan City, Nanhai District, Danzao Town, Hengjiang New Road  
10 號

**3.Q:** 如何選擇合適的管材？

管徑：

(1) 管徑 (管徑 × 壁厚 × 管長, 單位)

(2) 管徑

(3) 管徑

**4.Q:** 如何選擇合適的管材？

管徑：管徑

**5.Q:** 如何選擇合適的管材？

管徑：管徑 T/T 管徑 L/C 管徑 30% 管徑 T/T, Western Uion,

**6.Q:** 如何選擇合適的管材？

管徑：管徑 5 管徑

管徑

**7.Q:** 如何選擇合適的管材？

A: 管徑

管徑

**8.Q:** 如何選擇合適的管材？

管徑：管徑 15 管徑