


公司名稱	浙江中興塑料有限公司
縮寫	ZXC
地址	Foshan City, 廣東省, 中國 (廣東省)
材料	Acrylonitrile Styrene Acrylate Copolymer, Polyvinyl Chloride 聚丙烯腈-苯乙烯-丙烯酸酯共聚物, 聚氯乙烯
厚度	25 mm
認證	ISO9001 / SGS / CE / 中國國家標準
包裝	100 個裝
規格	1x20gp 每包 6 個 1x40gp 每包 7 個
重量	每個 8 磅 每包 13500 磅
價格	t/t, 每噸 30% 折扣
運輸	門到門 (FCL) 或 門到港 (LCL) 均可
保質	PE
地點	中國 / 廣東省 / Foshan
其他	廣東省, 中國, Grange, 廣東省




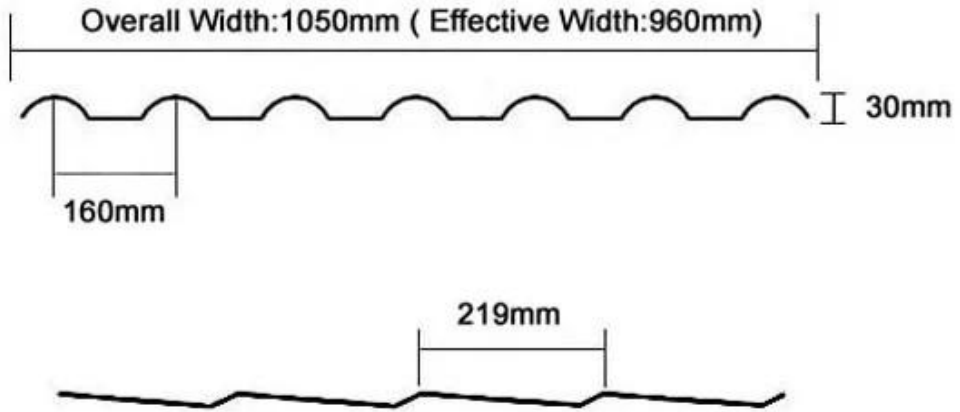

Purplish Red Brick Red Sky Blue Black Dark Green

□□□□□□□□□□	#1050-160-30
□□□□□	□□□□□□□□□□
□□□□□□□□□□□□□□	1050 □□.
□□□□□□□□□□□□□□□□□□□□	960 □□.
□□□□□□□	2.3 □□. / 2.5 □□. / 2.8 □□. / 3.0 □□.
□□□□□□□	□□□□□□□□□□□□□□□□
□□	□□□□□ / □□□ / □□□□ / □□□□□□□□□□□□□□□□□□□□□□□□□□□□ / □□□□□□□□□□□□
□□□□□□□□□□□□□□□□	160 □□.
□□□□□□□□□□□□□□	30 □□.
□□□□□□□□□□□	219 □□.



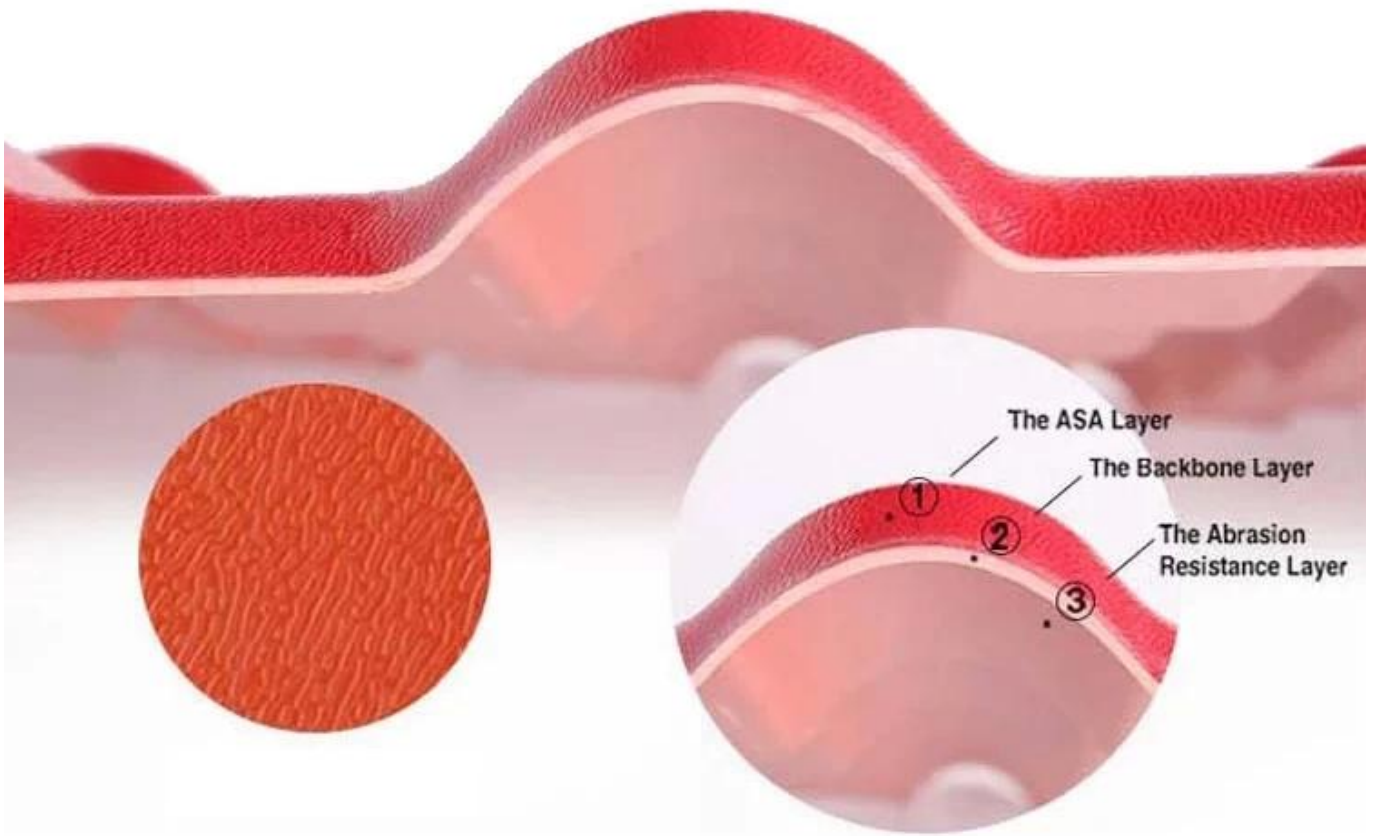

ASA 層

ASA 層: ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

ASA 層: ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

ASA 層: ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

ASA 層: ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

ASA 層

- ASA 層 (厚さ 10 mm)
- ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

ASA 層 excellent

- ASA 層 (厚さ 10 mm)
- ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

ASA 層

- ASA 層 (厚さ 10 mm)
- ASA 樹脂 (ASA) と GE 500 (Super Weather Resistance, Don 10) を配合し、T 値を 0.15 以下に調整し、0.15-0.18 の厚さを確保する。

• 屋顶防腐处理

• 屋顶防腐处理 ≥ B1

屋顶防腐处理 GB8624-2006

• 屋顶防腐处理

屋顶防腐处理 0.325W/m.k, 屋顶防腐处理 1/300 屋顶防腐处理, 屋顶防腐处理 1/50 屋顶防腐处理 1/2000 屋顶防腐处理

屋顶防腐处理

屋顶防腐处理

• 屋顶防腐处理

屋顶防腐处理

屋顶防腐处理

CT Case Show





Warranty 25-years



Warranty 25-years



Warranty 25-years



Warranty 25-years

ABOUT US




QUALITY, INNOVATION, STRUGGLE, WIN-WIN

we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



PRODUCTION PROCESS

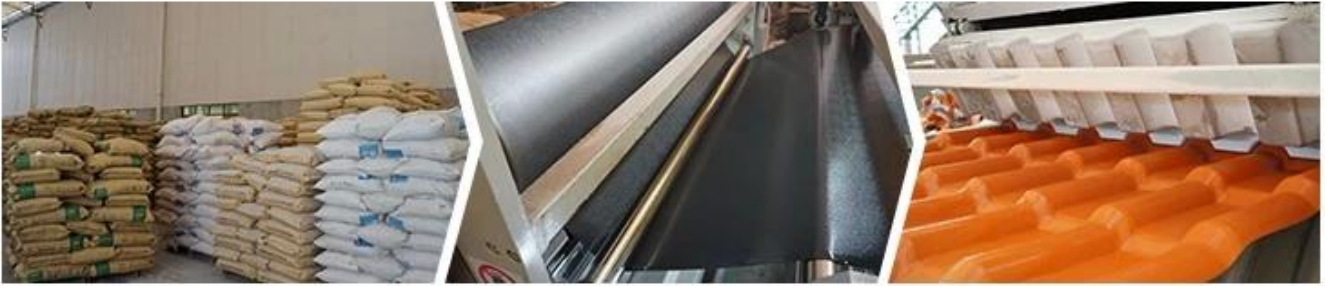

① Raw Materials

② Extrusion

③ Compression Molding



④ Cutting

⑤ Finished Product

⑥ Inspection

CERTIFICATE

Foshan Supervise Testing Centre of Quality

Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	The surface should be smooth with uniform appearance and without cracks, holes, warping, bubbles, and other defects.
2	Surface layer thickness	mm	3.0±0.1
3	Bend strength	MPa	≥20
4	Bend stress at break	N	≥300
5	Flexural strength	MPa	≥10
6	Flexural elastic modulus	MPa	≥2200
7	Density	g/cm ³	1.3±0.02
8	Water sorption (24h)	%	≤0.10
9	Water sorption (72h)	%	≤0.15
10	Water sorption (168h)	%	≤0.20
11	Water sorption (240h)	%	≤0.25
12	Water sorption (336h)	%	≤0.30
13	Water sorption (420h)	%	≤0.35
14	Water sorption (504h)	%	≤0.40
15	Water sorption (588h)	%	≤0.45
16	Water sorption (672h)	%	≤0.50
17	Water sorption (756h)	%	≤0.55
18	Water sorption (840h)	%	≤0.60
19	Water sorption (924h)	%	≤0.65
20	Water sorption (1008h)	%	≤0.70

Foshan Supervise Testing Centre of Quality

Test Report

Client: Foshan Zhongxing Plastic Factory

Product: Plastic Tile

Model: ASA-1

Test Results: All items passed.

celab

CERTIFICATE

DECLARATION OF CONFORMITY TO THE CE MARKING REQUIREMENTS

Product: Plastic Tile

Model: ASA-1

Manufacturer: FOSHAN ZHONG XING CHENG PLASTIC FACTORY

Address: No. 30, Industry Road, Daxun, Foshan, Guangdong, China

CE Marking: CE

www.celab.com

Beide

DECLARATION FOR CONSTRUCTION PRODUCTS DIRECTIVE

On behalf of

FOSHAN ZHONG XING CHENG PLASTIC FACTORY

Plastic Tile

Model: ASA-1

Issued For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY

Address: No. 30, Industry Road, Daxun, Foshan, Guangdong, China

Issued By: BEIDE (UK) PRODUCT SERVICE LIMITED

Address: Unit 101, 25 INDECOON SQUARE, LONDON, UNITED KINGDOM

Address: CHINA: SF, Binye E, Huanan 3rd Ind Zone, Xixiang, Bai' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 18, 2016

Date of Report: Mar. 11, 2016

Report Number: B-816530176

Appendix 1

Photo: [Image of Plastic Tile]

Photo: [Image of Plastic Tile]

