

Product show




1. A variety of raw materials by a certain percentage mixing, into the hopper



2. The mixed raw materials are pre-formed and heated to become flat tiles



3. Then through the mold pressure, elastic the molding, cooling, through the traction machine slowly introduced

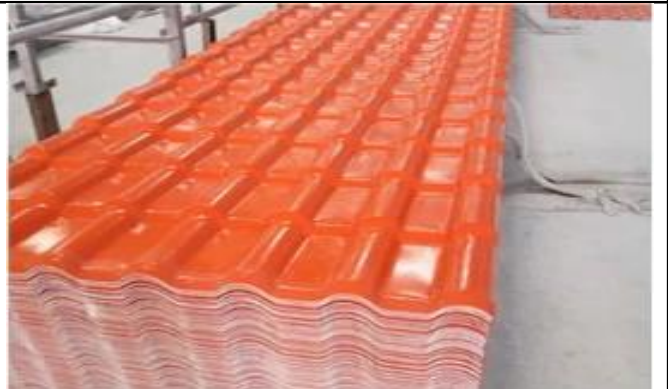

4. To achieve the length of customer needs cut off after artificial out

公司名稱	廣東省佛山市順德區均安鎮
廠址	ZXC
公司名稱	Foshan City, 廣東省佛山市, 均安鎮 (順德區)
材料	Acrylonitrile Styrene acrylate copolymer,, Polyvinyl chloride,, Calcium powder, other chemical materials
厚度	25 mm
認證	ISO9001 / SGS / CE
包裝規格	100 個裝
包裝規格	1x20gp 每包 6 個 1x40gp 每包 7 個
包裝規格	每包 8 個 每包 13500 個
包裝規格	t/t, 30% 預付, 其餘 L/C ,
運輸	海運 (FCL) 或 陸運 (LCL) 均可
材料	PE
廠址	廣東省 / 廣州市 / Foshan
廠址	廣東省, 順德區, 均安, Grange, 廣東省
電話	#1050-160-30
傳真	
地址	1050 號.

厚度 重量	960 mm.
厚度	2.3 mm. / 2.5 mm. / 2.8 mm. / 3.0 mm.
厚度	Must be a multiple of 2mm
重量	重量 / 长度 / 宽度 / 厚度 / 重量
重量	160 mm.
重量	30 mm.
重量	219 mm.

表面

Surface: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride + Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bottom: The important material also is Polyvinyl chloride + Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

特点

- **超耐久性能** (超强耐候性 10 年以上)
 - The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.
- **Excellent Anti-corrosion performance**
 - Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.
- **Good Waterproofing Performance**
 - Synthetic Resin Tile selects highly weater-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.
- **Strong Fire Resistance**
 - Belonging flame retardant material, with fire resistance \geq B1 as tested by national authoritative departments according to GB8624-2006 standard.
- **Excellent Heat Insulating Property**
 - The heat conductivity coefficient is 0.325w/m.k, about 1/300 of clay tile, 1/50 of cement tile, and 1/2000 of thick color steel tile. Therefore without considering adding heat-preserving layer, the heat insulation and heat preservation of synthetic resin tile can still be optimized.
- **Good sound insulation**
 - 优异的吸音降噪性能





Purplish Red



Brick Red



Sky Blue














Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

Accessories





Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Wall thickness	mm	0.2	0.2	Pass
3	Thickness deviation	mm	±0.02	±0.02	Pass
4	Density	g/cm ³	---	1.15	---
5	Tensile strength	MPa	≥2.0	3.0	Pass
6	Elongation at break	%	≥2.0	1.0	Pass
7	Falling ball impact	J/kg	---	---	Confirmed
8	Heat resistance	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
9	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
10	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
11	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
12	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
13	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
14	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
15	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface.	Confirmed	Pass
2	Surface roughness	mm	0.1	0.1	Pass
3	Tensile strength	MPa	≥2.0	3.0	Pass
4	Elongation at break	%	≥2.0	1.0	Pass
5	Flexural strength	MPa	≥2.0	3.0	Pass
6	Flexural modulus	MPa	≥2.0	3.0	Pass
7	Density	g/cm ³	---	1.15	---
8	Heat resistance	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
9	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
10	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
11	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
12	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
13	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
14	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass
15	Flammability	---	The material should change no color after 10h at 120°C.	Confirmed	Pass



Our Factory





Our Customer



Packaging



FAQ

***Are you manufacturer or trader?**

***Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.**

***Can I order the product with i want to profile?**

***Of course you can, also we will produce the products according to your detail requests.**

***Can you put my company's brand on your products?**

* OEM & ODM

* ?

* .

* ?

*

* ?

* T/T 30%

• 7 30%

• FOB Shipping Port: Foshan, ,