Product show



1.A variety of raw materials by a certain percentage mixing, intohe hopper



2. The mixed raw materials are pref -ormed and heated to become flat tiles



3. Then through the mold pressure, lastic the molding, cooling, throughthe traction machine slowly introduced



4.To achieve the length of customerneeds ayırmak. after artificial out

Ürün adı	Spanish Style ASA Roof Tile		
Marka	Zxc		
Anavatan	Foshan city,Guangdong province,China(Mainland)		
Malzeme	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride,		
	Calcium powder,other chemical materials		
Garanti	25 yıl		
Sertifika	ISO9001 / SGS / CE		
minimum sipariş miktarı	100 square meter		
Teslimat süresi	1x20GP for 6 days,1x40GP for 7 days		
Supply Ability	We have 8 produce lines, about 13500 square meter every day		
Ödeme şartları	T/T , firstly pay 30% deposit, before loading container pay rest of		
	payment		
	L/C ,		
Nakliye	Full Container Load (FCL) Service,We do it by myself.		
	Less than Container Load (LCL) Service,We find our agents to do it.		
Package	Pallet or PE bag		
Liman	Guangzhou / Shenzhen / Foshan		
Başvuru	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc		
	riat to slope Project, Etc		

Model numarası	#1050-160-30
Tip	Spanish Style
Overall Width	1050mm
Effective Width	960mm
Kalınlık	2.3mm / 2.5mm / 2.8mm / 3.0mm

Uzunluk	Must be a Birden çok bölüm
Renk	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Dalga yüksekliği	30mm
Section Length	219mm

Yapı

Surface:Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don,t have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride ve Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bottom:The important material also is Polyvinyl chloride ve Calcium powder,but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

Özellik

· Uzun ömürlü Renk (at en az 10 years)

• The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

· Excllent Anti-corrosion performance

· Synthetic Resin Tile can resist longterm acid ,alkali and salt corrosion ,etc.Tests have proved that there would be no chemical reaction after soaking in salt and alikali and various acid under 60% .It is ideal for application in areas where acid rain is common.

· Good Waterproofing Performance

· Synthetic Resin Tile selects highly weater-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin, s waterproof performance has greatly increased than traditional tiles.

· Strong Fire Resistance

· Belonging flame retardant material, with fire resistance ≥ B1 as tested by national authoritative departments according to GBB8624-2006 standard.

· Excellent Heat Insulating Property

• The heat conductivity coefficient is 0.325w/m.k,about 1/300 of clay tile ,1/50 of cement tile,and 1/2000 of thick color steel tile. Therefore without condidering ading heat-preserving layer ,the heat insulation and heat preservation of synthetic resin tile can still be optimized.


· Good sound insulation

• Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.







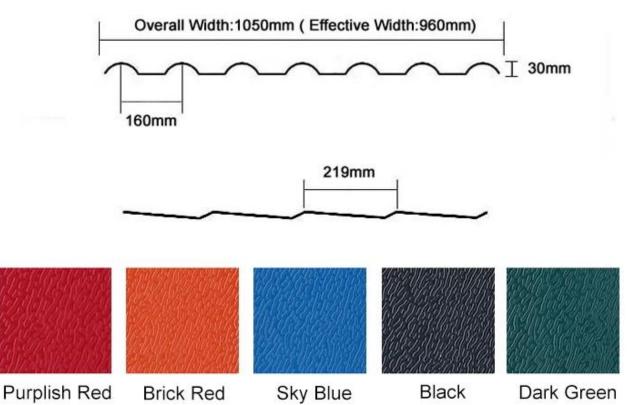

Product name		ASA Synthetic Resin Roof Tile					
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			e)		
Туре		Spanish Style					
Overall Width		1050mm					
Effective Width		960mm					
Thickness		2.3mm-3.0mm					
Length Customiz		Customized(According	stomized(According to the size of container)				
Color		Customized					
Purlin Spacing		660mm					
Thickness		2.3mm	2.5mm	2.8mm	3.0mm		
Weight (kg/SQM)		4.6	5.0	5.6	6.0		
capacity	20 GP (21 Tons)	4500	4200	3750	3500		
	40 GP (26 Tons)	5600	5200	4600	4300		
Feature		1.Excllent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness, ageing resistance					
Packa	ige	Nude or standard export package					

tem No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	1
2	Main Ridge Tile			Main Ridge Tumup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile	and the same of th	11	Vertical Wall Flashing Tile	
	Antique eave drip tile	4pipipipipis	12	Screw And Hat	
6	Three-way				

Accessories





Certificate













Our Factory











Our Customer



Packaging













FAQ

- *Are you manufacturer or trader?
- *Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.
- *Can I order the product with i want to profile?
- *Of course you can, also we will produce the products according to your detail requests.
- *Can you put my company's brand on your products?

- * Evet, OEM ve ODM hizmetini kabul ediyoruz, ancak şirketiniz hakkında bazı bilgilere ihtiyacımız var.
- *Çatı kaplama levha nasıl kurulur?
- *Lütfen servis personelimizle iletişime geçin, sizin için kurulum videomuz var.
- *Pazarı açıp test etmem için örnekler verebilir misiniz? kalite?
- *Evet, size ücretsiz örnek verebiliriz, nakliye maliyetini ödeyebilir misiniz? Lütfen servis personelimizle iletişime geçin.
- *Ticaret döneminiz nedir?
- * Ödeme: T/T% 30 önceden, sevkiyattan önce bakiye.
- Üretim teslim süresi:% 30 depozitten sonraki 7 iş günü içinde
- FOB Nakliye Limanı: Foshan, Guangzhou, Shenzhen