

Product show

□□□□ □□ **FRP** □□□□□□ □□ □□□□ □□□□ □□

[illegible]

ZXC □□□□□ □□□□ □□ □□□□ □□ □□□□□□ □□□□□□ □□ □□□□□□ □□□□ □□□□ □□□□

በጥንቃቄ ለመመረቅ በጥንቃቄ የሚሰሩ የፍትሕ ሰራተኞች %85-90 በጥንቃቄ የሚሰሩ የፍትሕ ሰራተኞች ናቸው፡፡

00000000 00 00000 000 00000000 00000 0000 05 / 1-4 / 1 000 00000000000 0000000000 02.0-1.3 000 000000000 000000000
 000000 00000000 .00000000 00000 0000000000 0000000000 0000000 0000000 000000 00000000000 FRP 80 000000 000 000
 00 00000000000 000000000 00 000000000 0000000 000000 000 00 00 130 000000 000 000000 000000 0000000 00 000
 00000 00000 00 00000000000 00000 .000000 0000000000 00 00000000000 FRP 0000000000 00000000000 00 00000000.

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible][illegible]




ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***

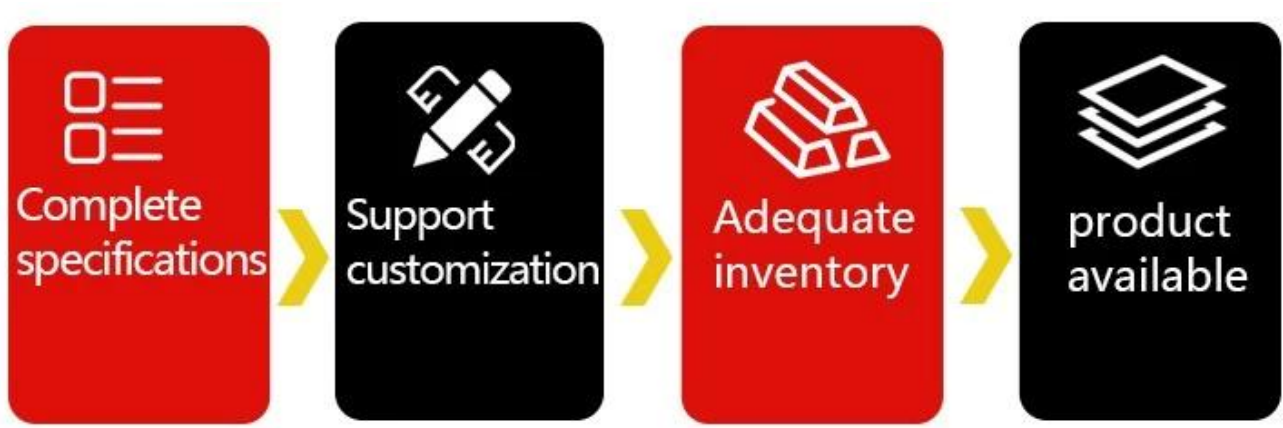

الخصائص العامة	الخصائص الفنية للمنتج
اللون	01-أبيض
السمك	السمك 2.0
الوزن	6000 كجم/متر مربع 11800 كجم/متر مربع
الارتفاع	الارتفاع 1.0 متر 1.2 متر 1.5 متر 2.0 متر
الخصائص الميكانيكية	930 كجم/متر مربع
الخصائص الكيميائية	840 كجم/متر مربع
الخصائص الحرارية	660 كجم/متر مربع
الخصائص الفيزيائية	1.0 ± 0.1 كجم/متر مربع
	1.2 ± 0.1 كجم/متر مربع
	1.5 ± 0.1 كجم/متر مربع
	2.0 ± 0.1 كجم/متر مربع
الخصائص الميكانيكية	1.7 ± 0.1 20/متر مربع
	2.1 ± 0.1 20/متر مربع
	2.6 ± 0.1 20/متر مربع
	3.0 ± 0.1 20/متر مربع
الخصائص الميكانيكية العامة	
SQ.M./20 FCL (21 كجم)	كجم 26) 40/متر مربع (كجم)
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

نحن نقدم خدمات مخصصة منخفضة السعر، إذا كان لديك أي احتياجات لبلاط السقف، فلا تتردد في الاتصال بنا للمبيعات أو ترك رسالة لنا!

CUSTOMER CASE SHOW

Has more than ten years of production experience



厚度:	1.0 mm 2.8 - mm
宽度:	1130/ 930/ 900/ 840 mm
长度:	可定制长度
表面处理:	镀锌 铝 不锈钢 铜
定制服务:	可定制
定制服务 内容:	可定制长度 可定制宽度 可定制厚度 可定制表面处理 可定制颜色 可定制形状 可定制尺寸 可定制重量 可定制数量 可定制包装 可定制运输 可定制安装 可定制维护 可定制其他

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details



CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS “ TO CHOOSE US

Iron tiles can be directly covered



*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening




Our Factory

Zhongxingcheng New Material Co., Ltd. 廠址設於中國廣東省佛山市南海區. 主要生產各種塑料薄膜, 如: ASA, APVC, PVC, FRP 等. 產品廣泛應用於建築、農業、工業等領域. 歡迎各界人士垂詢.



FACTORY REAL SHOT DISPLAY

Professional production to do every step

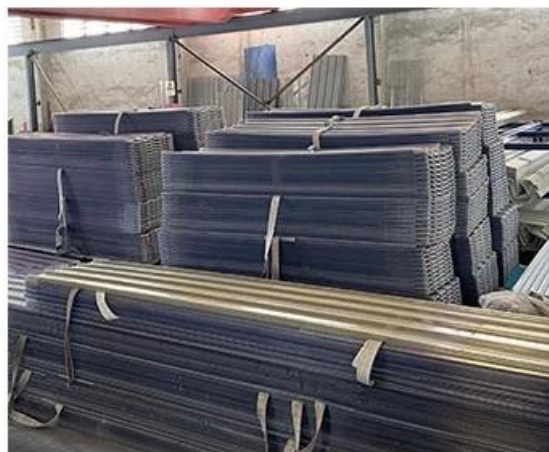

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



— 01 —

ONLINE CONSULTATION

Provide professional product
consultation



— 02 —

PROVIDE PRICING

Provide reasonable price for
product performance



— 03 —

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

ORDER PRODUCTION

Professional and rapid production
of multiple production lines

— **05** —

AFTER DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00

0000 000 0000 000 00000 000 000. 000000 00000 00 00000 00 000000 0000 00000000 000000 000 0000 *
 .000000 000000 000000 00000 0000 00 00000 000 0000000000 000000 000000 0000000

000000 0000000 00 0000 00000 0000000 000 0000000 00*

.00000000000 000000000 000000 0000000000 0000000 000000 0000000 00000 000000 000000

0000000000 000 0000000 0000000000 000000000 000 000000 00 *

.000000 000 0000000000 000 000 000000 0000000 .00000000 00000000 000000 000000 0000 0000 000 0000 *

□□□□□□□□ □□□□ □□□□□ □□□□□ *

. 00 000000 00000 00000 000000 000000 000000 000000 000000 0000*

[illegible]

. 00000 000000 000000 0000000 0000 0000000 000000 000 000000 00 000 000000 000000 000000 000000 000000 0000 *

□□□ □□□□□ □□□□□□□ □□□□□ □□ □□ *

□□□□ *: T/T 30% .□□□□ □□ □□□□ □□□□

□30 □□□□ □□ □□ □□□ 7 □□□□ □□ :□□□□□□ □□□□ •

□□□□□□ □□□□□□□□□□ □□□□□□ :□□□ □□□□□ □□□□□□ •