
Product show

مع عامل ومضافات مقاومة للأشعة فوق البنفسجية. من خلال التركيب العلمي ، PVC المادة الخام الرئيسية هي ZXC لوح تسقيف المصنوع من التكنولوجيا المتقدمة.

1. 00000 00000 00000 00000 .2 000000 000000 00000 .3 000000 000 .4 000000 000000 .5 000 000 000 .6

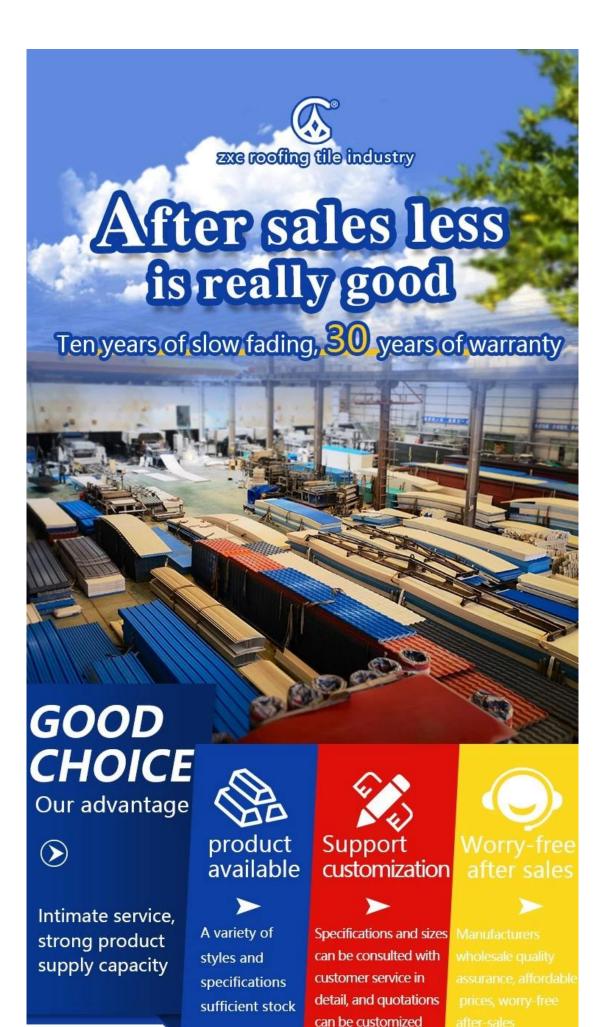

	1 🛛 12 - 🖂
000	0000 000
	3.0-6.8 🛮 / 🗓 🗎
000	1130 930 / 980 / 1050 / 1080 /
0000	30 🖂
0000000 000	0000 000 ASA PVC
00000	000000 0 000000 0 000000 0 000000 0 0000
000	0000 000 0000 00000 00000 00000 00000 0000
000000 00 0000000	1 []
00000 0000	—10 gaaga gaaa 70 aga gaaa gaaa
000	000000 0000 0 0000 0 0000 0 0000
00000	2 0000 3 00
0000 0000	10 000000 00 00000

لتعلم المزيد <u>upvc انقر الصين المورد الأغطية</u>

SOURCE MANUFACTURER

.







THE TROUBLES OF TRADITIONAL ROOF TILES

Ħ

other products





severely faded
Wind and sun soften and fade

There is a gap

Uneven with gaps, leaking rain



uneven color

Weathered uneven color phenomenon




Fragile

Fragile and complicated to install

our products √

Ten years of slow fading, 30 years of warranty

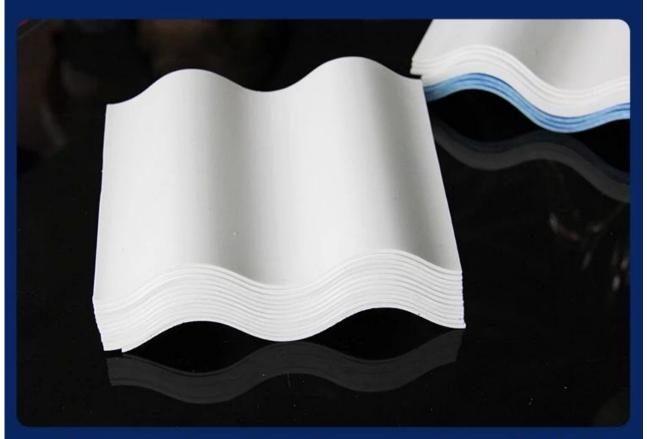

Uniform color, durable and not easy to fade Good quality, durable and bright.



high toughness



Strong pressure resistance



thermal and acoustic insulationhigh-quality
Good sound insulation effect in case of external noise



preservative
Anti-acid and alkali



flame retardant performance b1 class fire performance

PRODUCT PARAMETERS

#

>



thickness: 1.0mm-3.0mm

width: 1130/980/900/840/1080mm

length: customizable

waveform: big hang, small wave

type: asa plastic roofing tile

Be applicable: Factory buildings, ware houses,

markets, residences, market roads, canopies, chemically


corrosivefactories

A variety of colors, optional to build different architectural styles

More colors can be customized

Mlight yellow> <dark blue> <grass green> <Beige>

Accessories and Installation Diagram

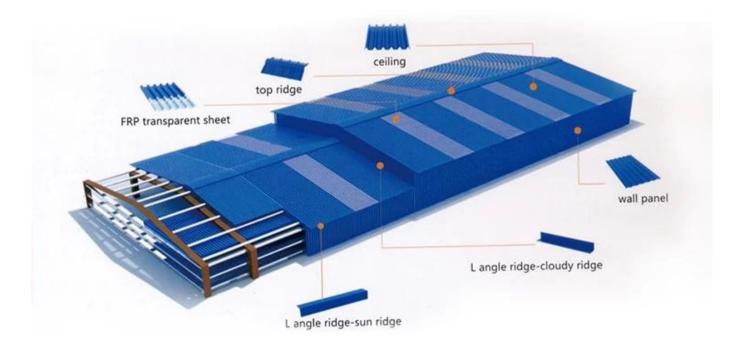

*pvc plastic waterproof cap, used with self-tapping screws to fix the tile on the skeleton







CUSTOMER CASE SHOW











Our Factory









Quality inspection instruments strictly control the quality

Each batch of products has undergone rigorous testing.



Gravity testing



Hardness testing



Tensile force testing



Impact resistance testing









Exhibition











Certificate

Official quality inspection, quality assurance

Multiple quality inspection and testing to ensure good quality.























Packaging



FAQ

- * 00000 00 0000 000 00
- $^{\circ}$
- *

_____ * OEM _ ODM _ . _ ODD _ ODDD _ ODD _ ODD _ ODD _ ODD _ ODD

00000000 000 00000 00000 *

 $^{\circ}$ 00 000000 00000 0 00000 000000 000000 *