



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***



الخصائص	القيمة	القيمة
الارتفاع	01-000	
العمق	000	
العرض	6000	11800
الوزن	الوزن الكلي للوحة الواحدة	
الوزن الكلي للوحة الواحدة	930	
الوزن الكلي للوحة الواحدة	840	
الوزن الكلي للوحة الواحدة	660	
السمك	1.0 ± 0.1	
	1.2±0.1	
	1.5±0.1	
	2.0 ± 0.1	
السمك	1.7±0.1 20/000	
	2.1±0.1 20/000	
	2.6±0.1 20/000	
	3.0±0.1 20/000	
الخصائص		
SQ.M./20 FCL (21	26	40/000
12000 2	15000 2	
10000 2	12300 2	
8000 2	10000 2	
7000 2	8600 2	

ورقة التسقيف المورد الصين، تقديم خدمات مخصصة FRP نحن منخفضة السعر، إذا كان لديك أي احتياجات لبلاط السقف، فلا تتردد في الاتصال بنا للمبيعات أو ترك رسالة لنا!

CUSTOMER CASE SHOW

Has more than ten years of production experience



厚度:	1.0 mm 2.8 - mm
规格:	1130/ 930/ 900/ 840 mm
材质:	铝
用途:	散热器
表面处理:	阳极氧化
其他信息:	该产品具有重量轻、强度高、耐腐蚀、使用寿命长等特点。广泛应用于汽车、工业、船舶等领域。

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details



CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation


*High
temperature
resistance*

*anti
-stress*

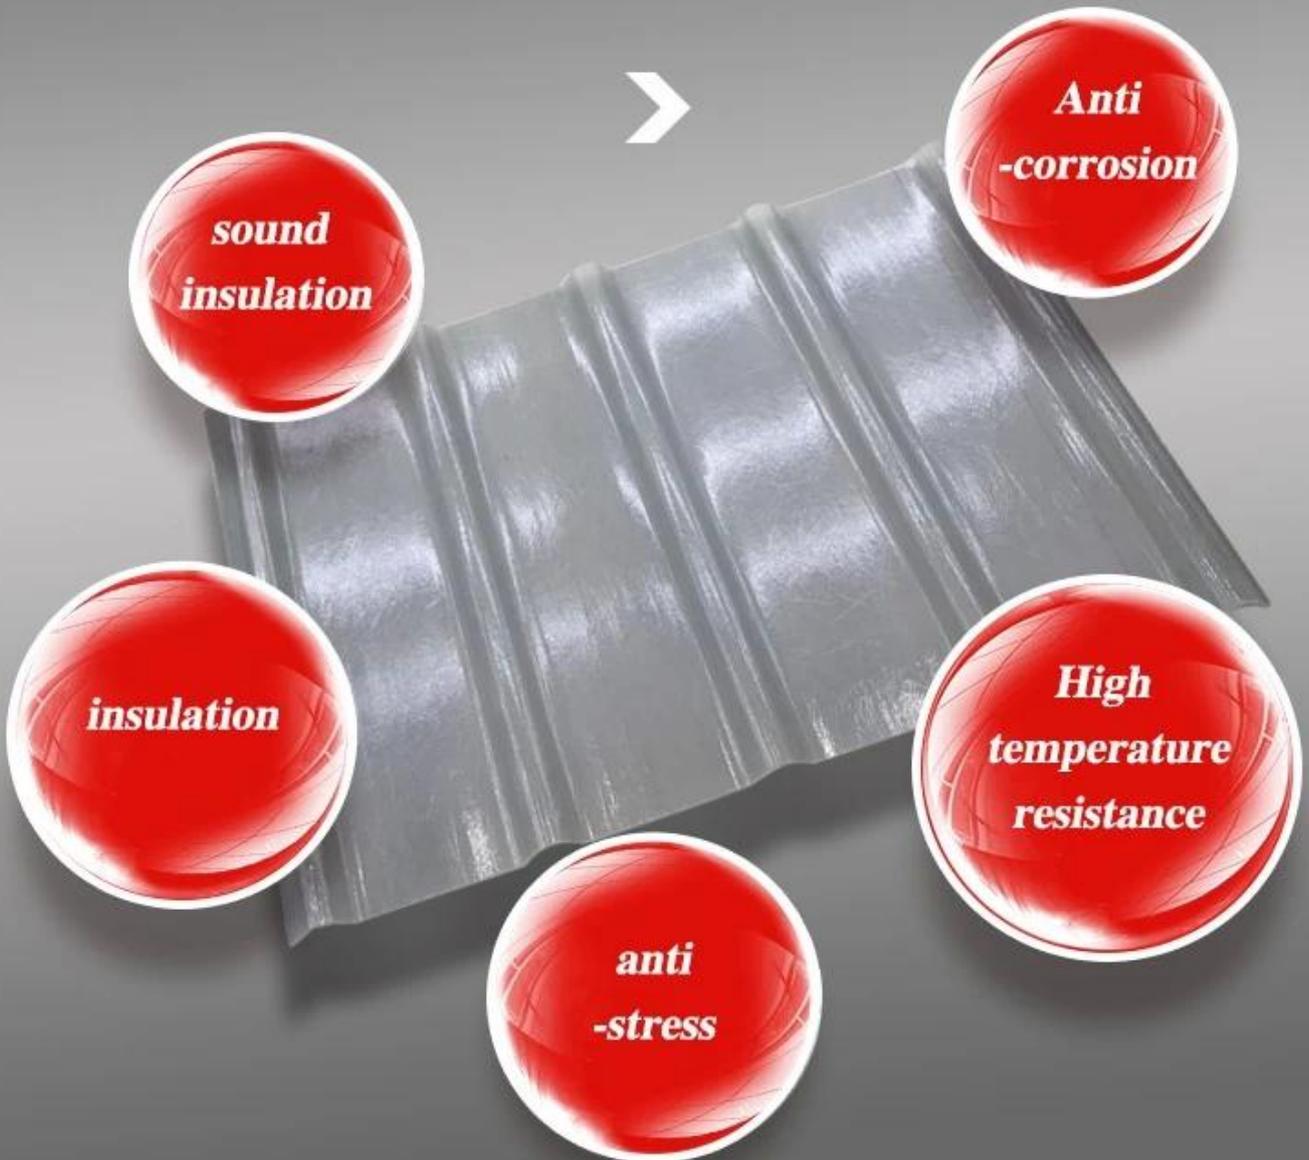

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

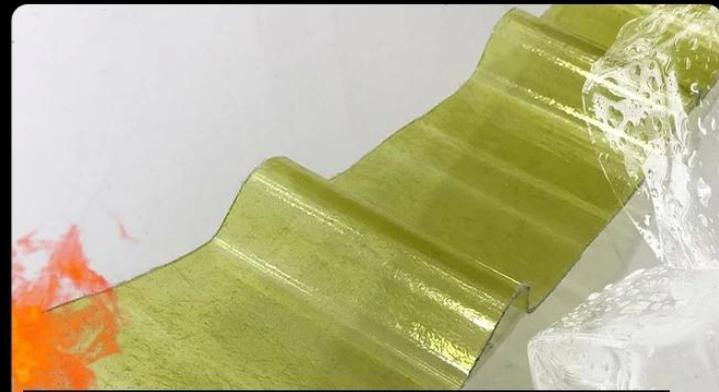

01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



06

Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.

Our Factory

Zhongxingcheng New Material Co., Ltd. 公司位于中国广东省佛山市南海区. 公司主要生产 ASA 塑料板, APVC 塑料板, PVC 塑料板, PVC 塑料管, PVC 塑料型材, FRP 玻璃钢等.



FACTORY REAL SHOT DISPLAY

Professional production to do every step



Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



01

ONLINE CONSULTATION

Provide professional product
consultation



02

PROVIDE PRICING

Provide reasonable price for
product performance

03

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

ORDER
PRODUCTION

Professional and rapid production
of multiple production lines

— **05** —

AFTER
DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 2023년 10월 10일 기준

본 페이지는 고객님들의 궁금증을 해소하기 위해 마련되었습니다. 고객님들의 문의사항에 대해 신속하게 답변드리고자 합니다. *
본 페이지는 고객님들의 문의사항에 대해 신속하게 답변드리고자 합니다.

본 페이지는 고객님들의 문의사항에 대해 신속하게 답변드리고자 합니다.*

