

Name: synthetic resin

Model:1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

Dimensional measurement method


both sides

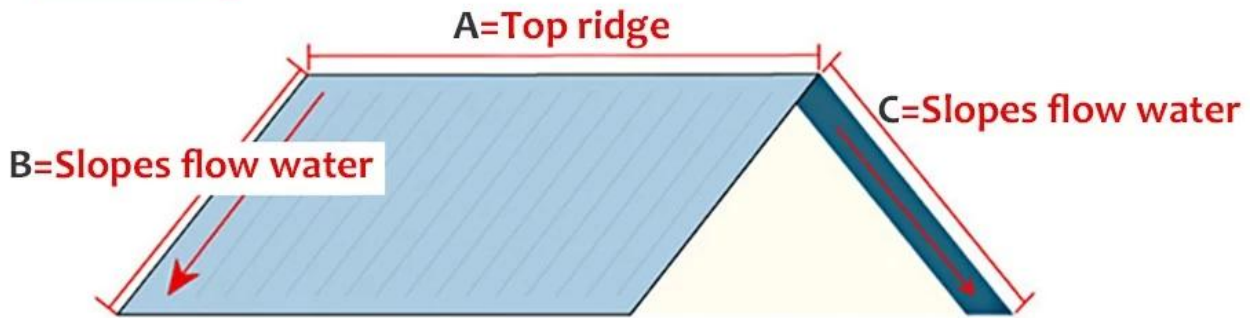

1. Measure the dimension of the A top ridge.
2. Measure the dimensions of B
3. Measure the dimensions of C

Measure all the dimensions (don't forget the eaves)


four sides

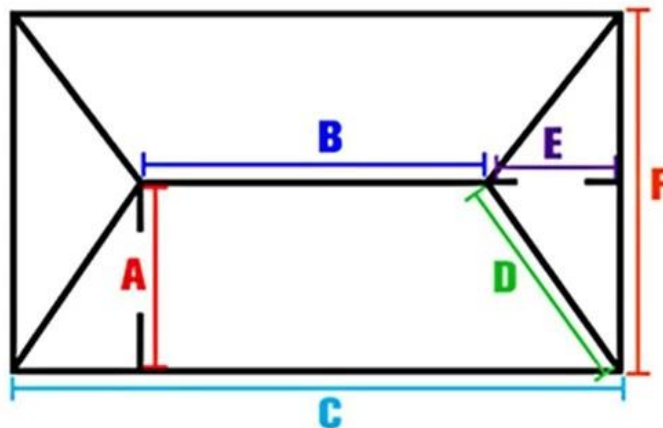

1. Measure the dimension of the B top ridge.
2. Measure the dimensions of ramp A
3. Measure the width of C
4. Measure the dimensions of the D diagonal ridge.
5. Measure the dimensions of ramp E
6. Measure the width of F

Measure all the dimensions (don't forget the eaves)

Roofing accessories

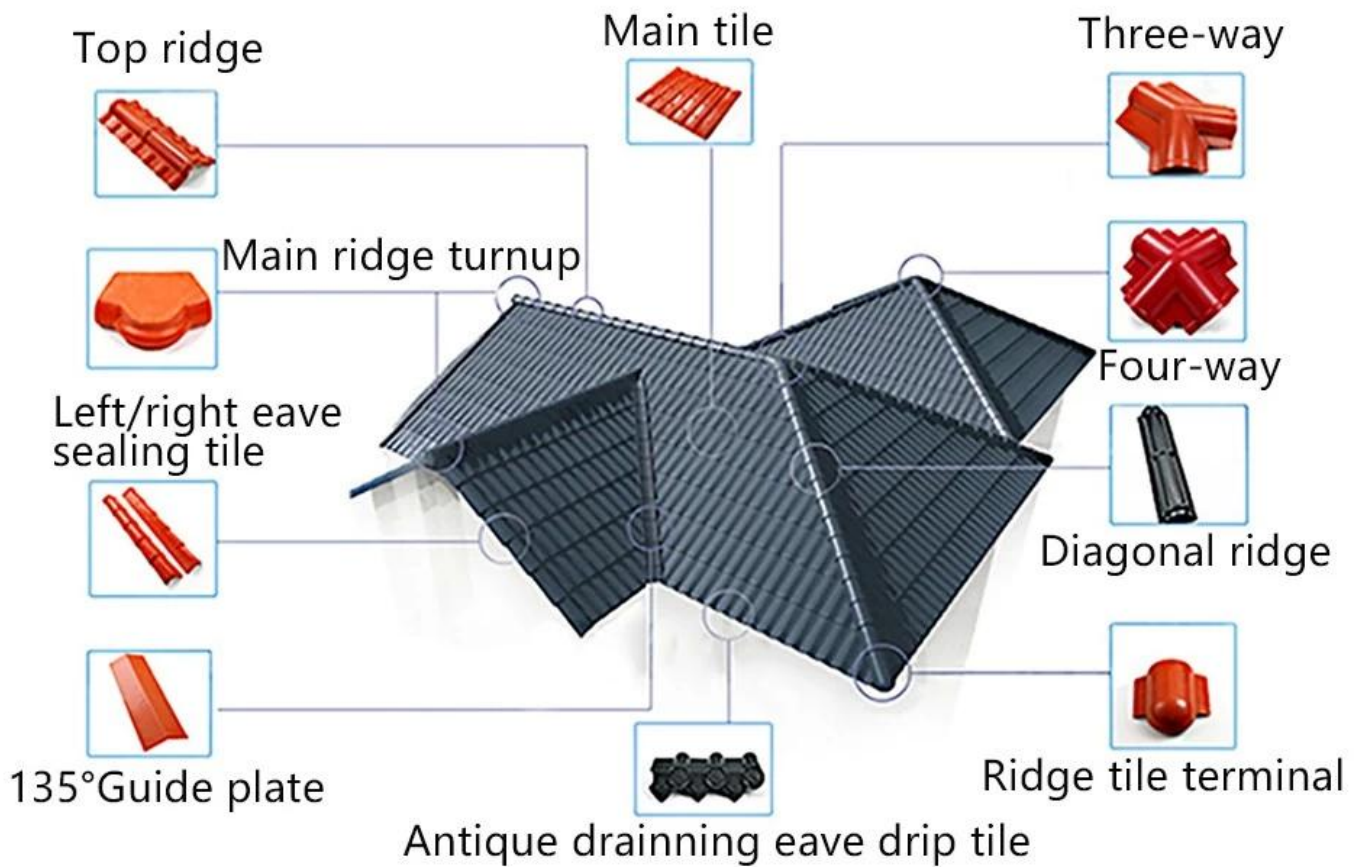

Installation considerations

1. The purlins can use square pipe (60x40x3mm)
2. The purlins can use C-shaped steel (100x50x20x3mm)
3. The purlins can use anti-corrosion wood square (60x40mm)
4. purlin spacing of 660mm

Our Factory

公司 Zhongxingcheng New Material Co., Ltd. 位于 佛山 南海区 China 公司 生产 各种
 塑料 型材 包括 ASA 塑料 型材 以及 APVC 塑料 型材 PVC 塑料 型材
 以及 FRP 塑料 型材 PVC 塑料 型材 PC 塑料 型材。



Factory display



9 production lines



Raw material warehouse



Product comparison

Learn all about our products

Dacheng resin roofing tile

Recyclable resin roofing tiles



Brand new raw materials imported
bright color, long service life
30~50 years



Recycled materials, dull color, easy
to have black spots in appearance
very short life.



Brand new material, good
plasticization, long service life



Recyclable material, reduced
toughness, many impurities,
easy to break



ASA surface thickness 0.1~0.15mm
does not foam and does not fall off



The thickness of the surface layer of
the film is 0.05~0.1mm, which is
easy to blister and fall off

Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00
 0 000 000 0000 000 00000 000 0000 .0000000 000000 00 000000 00 0000000 00000 0 00000000 0000000 0000 0 0000 *

0000 00000000 0000 0000 0000000 000 0000000 00 *

000000000 000 0000000 0000000000 00000000 000 000000 00 *

