

Product show

□□□□ □□ **FRP** □□□□□□ □□ □□□□ □□□□ □□

[illegible]

☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

[illegible]

□ □ □ □ □ □ □ □ □

00000000 00 0000 000 000000 0000 000 05 / 1-4 / 1 000 00000000 00000000 02.0-1.3 000 00000000 00000000
 00000000 000000 00000 .00000000 0000 00000000 00000000 00000 000000 00000 0000000000 **FRP** 00000 00
 00 00000000 00000000 00000 000 00 00 130 000000 000 000000 00000000 00 000 80 000000 000 000 00000000 00000000
 00000 00000 00 0000000000 00000 .000000 0000000000 00 0000000000 0000 0000000000 **FRP** 00 00000000
 00000000 0000000000.

□□□□□□□□ □□□□□□□□ □□□□□□□□ □□□□

အောက်ဖော်ပြပါ အချက်များကို) အား FRP အောက်ဖော်ပြပါ အချက်များ အတိုင်း အကောင်အထည် ဖော်ပြပါ (အောက်ဖော်ပြပါ) အချက်များ 10 အား အောက်ဖော်ပြပါ အချက်များ အတိုင်း အကောင်အထည် ဖော်ပြပါ.

[illegible]




ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***

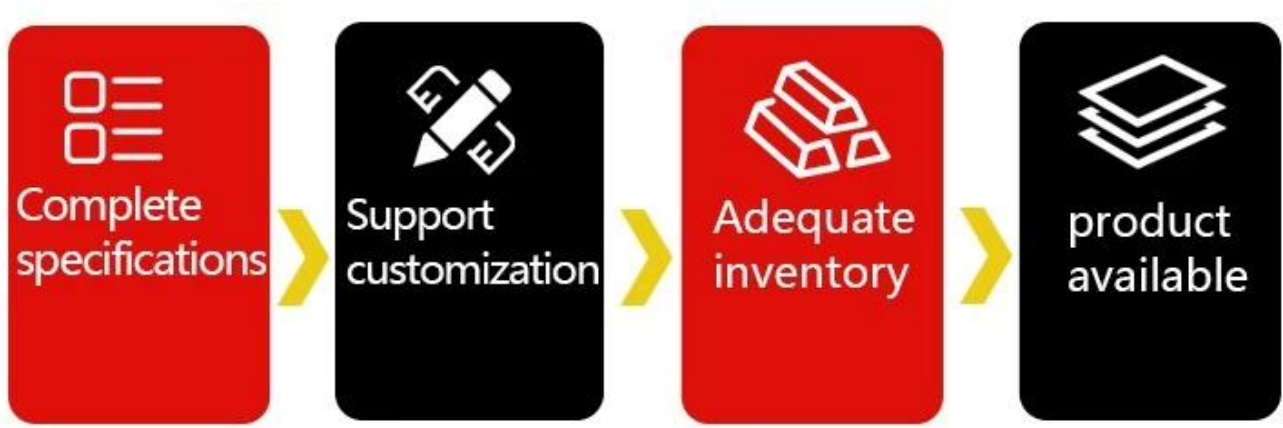

الخصائص العامة	الخصائص الفنية
النموذج	01-000
الوزن	الوزن
الارتفاع	6000 ملم / 11800 ملم
العرض	العرض
السمك	930 ملم
اللون	840 ملم
الطلاء	660 ملم
الطلاء	1.0 ± 0.1 ملم
الطلاء	1.2 ± 0.1 ملم
الطلاء	1.5 ± 0.1 ملم
الطلاء	2.0 ± 0.1 ملم
الطلاء	1.7 ± 0.1 20/1000
الطلاء	2.1 ± 0.1 20/1000
الطلاء	2.6 ± 0.1 20/1000
الطلاء	3.0 ± 0.1 20/1000
الخصائص الفنية	
SQ.M./20 FCL (21 قف)	26 قف 40/2000 قف
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

نحن نقدم خدمات مخصصة منخفضة السعر، إذا كان لديك أي احتياجات لبلاط السقف، فلا تتردد في الاتصال بنا للمبيعات أو ترك رسالة لنا!

CUSTOMER CASE SHOW

Has more than ten years of production experience



厚度:	1.0 2.8 -
规格:	1130/ 930/ 900/ 840
材质:	铝镁锰板
表面处理:	氟碳漆 粉末喷涂 阳极氧化
铝镁锰板规格:	1219
铝镁锰板厚度:	1.0 2.8 -

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue




grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

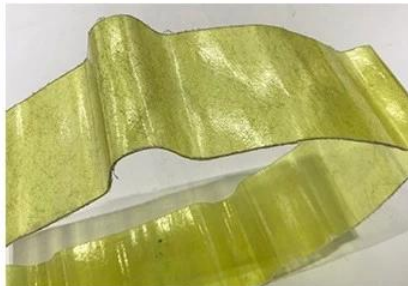

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS “ TO CHOOSE US

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*

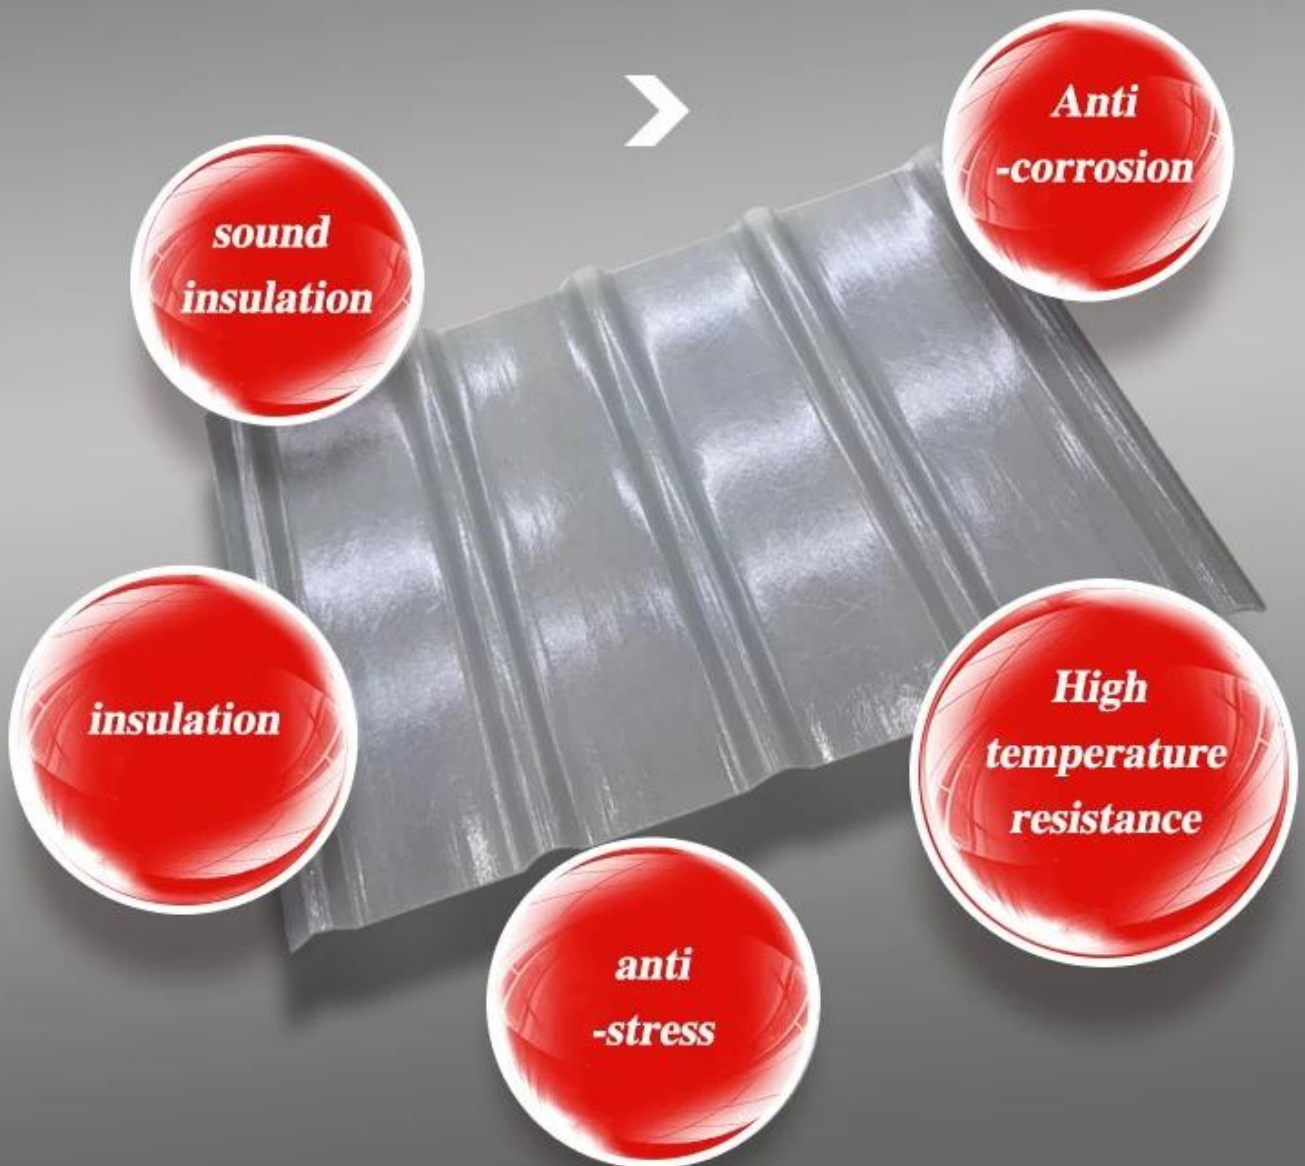

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



06

Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.


Our Factory

Zhongxingcheng New Material Co., Ltd. 廠址設於中國廣東省佛山市南海區. 主要生產各種塑料薄膜、片材、管材、異型材等。產品廣泛應用於農業、建築、交通、包裝等領域。公司擁有先進的生產設備和技術，產品質量優良，價格公道。歡迎各界人士垂詢。 產品種類包括：ASA、APVC、PVC、FRP 等。



FACTORY REAL SHOT DISPLAY

Professional production to do every step

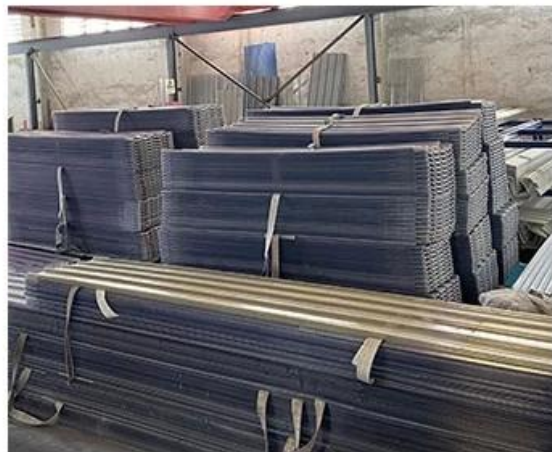

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



— 01 —

ONLINE CONSULTATION

Provide professional product
consultation



— 02 —

PROVIDE PRICING

Provide reasonable price for
product performance



— 03 —

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

ORDER PRODUCTION

Professional and rapid production
of multiple production lines

— **05** —

AFTER DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00

0000 000 0000 000 00000 000 000.000000 00000 00 00000 00 000000 0000 00000000 000000 000 0000 *
.000000 000000 000000 00000 0000 00 00000 000 000000000 00000 000000 0000000

000000 0000000 00 0000 0000 0000000 000 0000000 00*

.0000000000 00000000 000000 000000000 000000 000000 000000 00000 000000 000000

000000000 000 0000000 000000000 00000000 000 000000 00 *

.000000 000 0000000000 000 000 000000 0000000 .00000000 00000000 000000 000000 0000 0000 000 0000 *

□□□□□□□□ □□□□ □□□□□ □□□□□ *

. 00 000000 00000 00000 000000 000000 000000 000000 000000 0000*

[illegible]

. 00000 000000 000000 0000000 0000 0000000 000000 000 000000 00 000 000000 000000 000000 000000 000000 0000 *

□□□ □□□□□ □□□□□□□ □□□□□ □□ □□ *

□□□□ *: T/T 30% .□□□□ □□ □□□□ □□□□

□30 □□□□ □□ □□ □□□ 7 □□□□ □□ :□□□□□□ □□□□ •

□□□□□ □□□□□□□□□ □□□□□ :□□□ □□□□□ □□□□□ •