

Product show

[illegible]

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible]

FRP

00000000 00 00000 000 00000000 00000 0000 05 / 1-4 / 1 000 00000000000 0000000000 02.0-1.3 000 000000000 000000000
 000000 00000000 .00000000 00000 0000000000 0000000000 0000000 0000000 000000 00000000000 FRP 80 000000 000 000
 00 00000000000 000000000 00 000000000 0000000 000000 000 00 00 130 000000 000 000000 000000 0000000 00 000
 00000 00000 00 00000000000 00000 .000000 0000000000 00 00000000000 FRP 0000000000 00000000000 00 00000000.

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible][illegible]




ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***

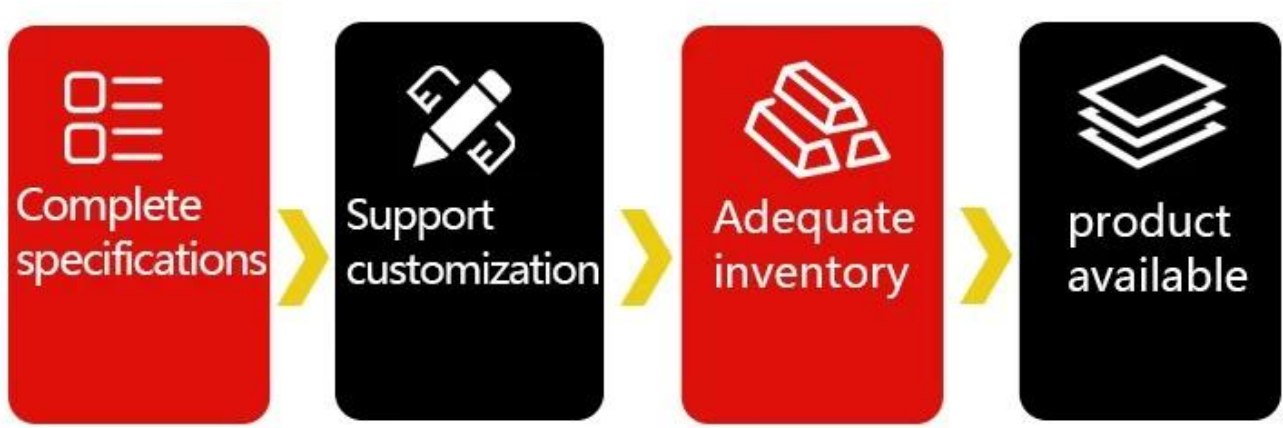

الخصائص	الخصائص
اللون	01-اللون
السمك	السمك
الوزن	6000 كجم/20 قدم 11800 كجم
الارتفاع	الارتفاع
الارتفاع	930
الارتفاع	840
الارتفاع	660
الارتفاع	1.0 ± 0.1
	1.2±0.1
	1.5±0.1
	2.0 ± 0.1
الارتفاع	1.7±0.1 20/20
	2.1±0.1 20/20
	2.6±0.1 20/20
	3.0±0.1 20/20
الارتفاع	
SQ.M./20 FCL (21 قدم)	26 قدم 40/20 قدم
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

خدمات مخصصة لألواح التسقيف البلاستيكية المموجة ذات السعر المنخفض، ZXC توفر إذا كان لديك أي احتياجات لبلاط السقف، فلا تتردد في الاتصال بنا للمبيعات أو ترك رسالة لنا!

CUSTOMER CASE SHOW

Has more than ten years of production experience

[illegible]

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details



CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS “ TO CHOOSE US

Iron tiles can be directly covered



*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*



“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



Our Factory

Zhongxingcheng New Material Co., Ltd. 廠址設於中國廣東省佛山市南海區. 主要生產各種塑料薄膜, 如: ASA, APVC, PVC, FRP 等. 產品廣泛應用於建築、農業、工業等領域. 歡迎垂詢.



FACTORY REAL SHOT DISPLAY

Professional production to do every step



Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



— 01 —

ONLINE CONSULTATION

Provide professional product
consultation



— 02 —

PROVIDE PRICING

Provide reasonable price for
product performance



— 03 —

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





—04—

ORDER PRODUCTION

Professional and rapid production
of multiple production lines

—05—

AFTER DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Multiple quality inspection and testing to ensure good quality.



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00

0000 000 0000 000 00000 000 000.000000 00000 00 00000 00 000000 0000 00000000 000000 000 0000 *

00000 000000 00 0000 0000 000000 000 000000 00*

.0000000000 00000000 00000 000000000 000000 00000 000000 0000 000000 00000 *

00000000 000 000000 000000000 00000000 000 000000 00 *

.000000 000 0000000000 000 000 000000 0000000 .00000000 00000000 000000 000000 0000 0000 000 0000 *

□□□□□□□□ □□□□ □□□□□ □□□□□ *

. 00 000000 00000 00000 000000 000000 000000 000000 000000 0000*

[illegible]

. 00000 000000 000000 0000000 0000 0000000 000000 000 000000 00 000 000000 000000 000000 000000 000000 0000 *

□□□ □□□□□ □□□□□□□ □□□□□ □□ □□ *

□□□□ *: T/T 30% .□□□□ □□ □□□□ □□□□

□30 □□□□ □□ □□ □□□ 7 □□□□ □□ :□□□□□□ □□□□ •

□□□□□ □□□□□□□□□ □□□□□ :□□□ □□□□□ □□□□□ •