

Name: synthetic resin

Model:1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

## Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

# Dimensional measurement method


## both sides

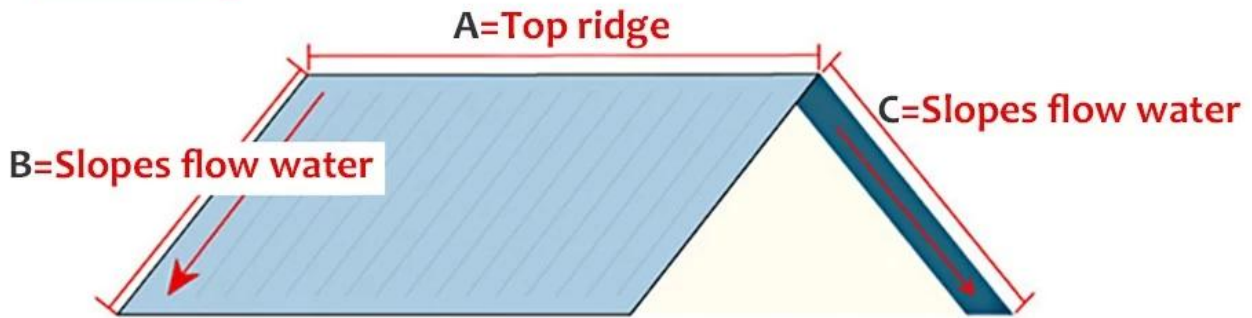

1. Measure the dimension of the A top ridge.
2. Measure the dimensions of B
3. Measure the dimensions of C

Measure all the dimensions (don't forget the eaves)


## four sides

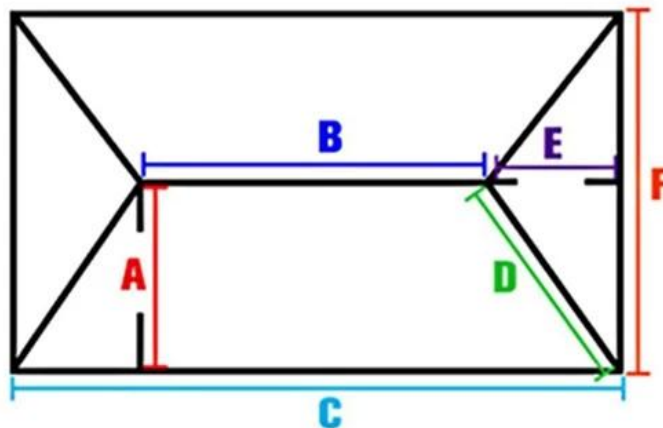

1. Measure the dimension of the B top ridge.
2. Measure the dimensions of ramp A
3. Measure the width of C
4. Measure the dimensions of the D diagonal ridge.
5. Measure the dimensions of ramp E
6. Measure the width of F

Measure all the dimensions (don't forget the eaves)

# Roofing accessories

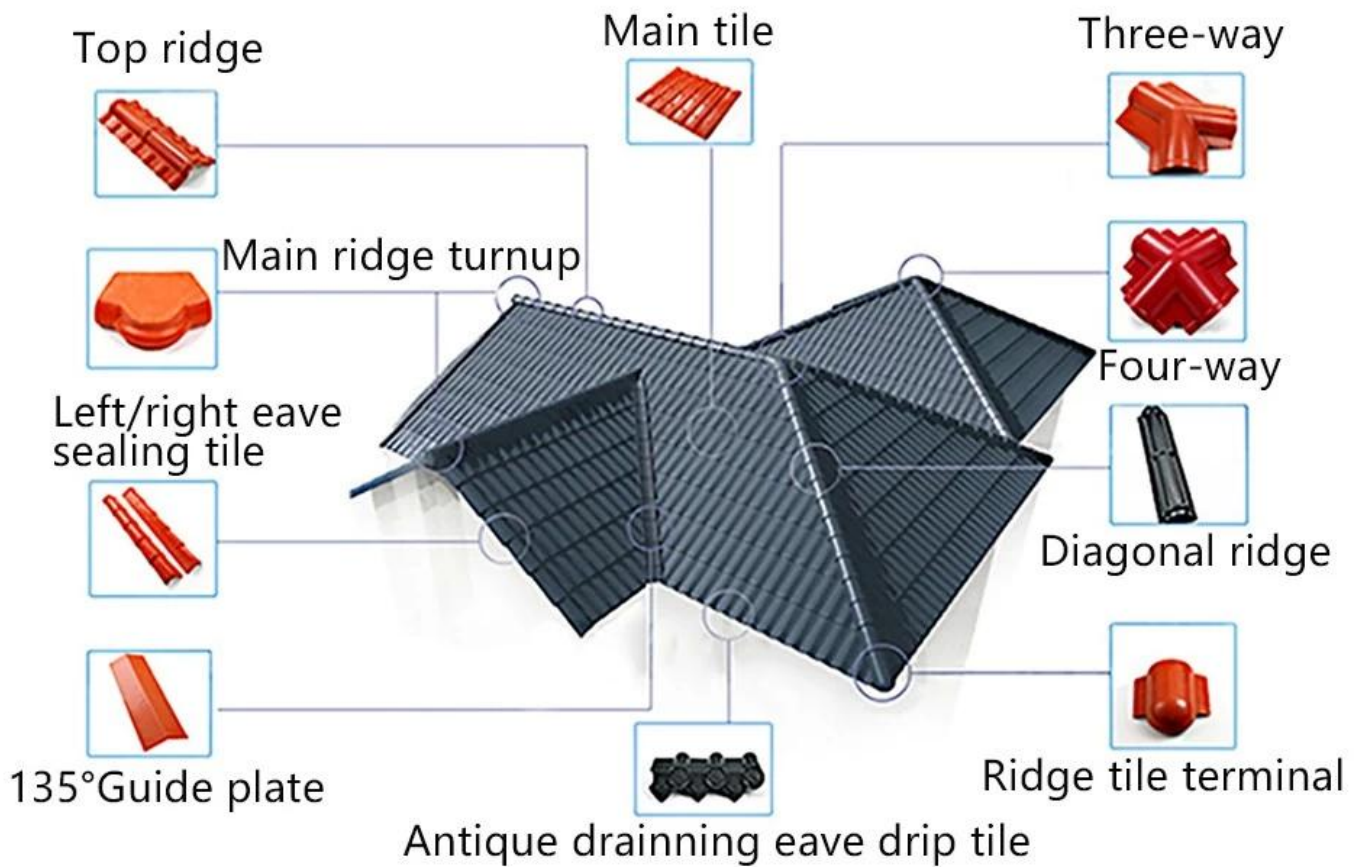

## Installation considerations

1. The purlins can use square pipe (60x40x3mm)
2. The purlins can use C-shaped steel (100x50x20x3mm)
3. The purlins can use anti-corrosion wood square (60x40mm)
4. purlin spacing of 660mm

## Our Factory

公司 Zhongxingcheng New Material Co., Ltd. 位于 佛山 南海区 China 公司 生产 各种  
 塑料 型材 包括 ASA 塑料 型材 以及 APVC 塑料 型材 PVC 塑料 型材  
 以及 FRP 塑料 型材 PVC 塑料 型材 PC 塑料 型材。



Factory display



9 production lines



Raw material warehouse





# Product comparison

Learn all about our products

Dacheng resin roofing tile

Recyclable resin roofing tiles



Brand new raw materials imported  
bright color, long service life  
30~50 years



Recycled materials, dull color, easy  
to have black spots in appearance  
very short life.



Brand new material, good  
plasticization, long service life



Recyclable material, reduced  
toughness, many impurities,  
easy to break



ASA surface thickness 0.1~0.15mm  
does not foam and does not fall off



The thickness of the surface layer of  
the film is 0.05~0.1mm, which is  
easy to blister and fall off

# Exhibition



# Certificate

# Security sense of authoritative testing

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



# Packaging



# FAQ

\* 00000 00 0000 000 00  
 0 000 000 0000 000 00000 000 0000 .0000000 000000 00 000000 00 0000000 0000 0 00000000 0000000 0000 0 0000 \*

0000 00000000 0000 0000 0000000 000 0000000 00 \*

000000000 000 0000000 0000000000 00000000 000 000000 00 \*

本公司 承辦 各種 \* OEM 及 ODM 業務 . 本公司 承辦 各種 零件 及 組裝 業務

本公司 承辦 各種 零件 \*  
. 本公司 承辦 各種 零件 及 組裝 業務 本公司 承辦 各種 零件 \*

本公司 承辦 各種 零件 及 組裝 業務 本公司 承辦 各種 零件 \*  
本公司 承辦 各種 零件 及 組裝 業務 本公司 承辦 各種 零件 及 組裝 業務 本公司 承辦 各種 零件 \*  
. 本公司 承辦 各種 零件

本公司 承辦 各種 零件 及 組裝 業務 本公司 承辦 各種 零件 \*  
本公司 \*: T / T 30% . 本公司 承辦 各種 零件 及 組裝 業務  
30% 本公司 承辦 各種 零件 7 本公司 承辦 各種 零件 : 本公司 承辦 各種 零件 •  
本公司 承辦 各種 零件 及 組裝 業務 : 本公司 承辦 各種 零件 •