

Product show

□□□□ □□ **ZXC FRP** □□□□□□ □□ □□□□□ □□□□:

[illegible]

□□□□□□ □□□□□□ □□□:□□□:

[illegible]

□□□□ □□□□:

00000000 00 0000 000 00000000 0000 000 05 / 1-4 / 1 000 0000000000 00000000 02.0-1.3 000 00000000 00000000
00000000 0000 0000000000 00000000 000000 000000 000000 000000 0000000000.

[illegible]

 :

[illegible]

ZXC ၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀ FRP ၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀ ၀၀၀၀၀၀၀၀
 ၀၀၀၀၀၀ ၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀ ၀၀ ၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀ ၀၀၀၀၀ ၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀
 ၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀ ၀၀၀ ၀၀၀ ၀၀၀၀၀၀
 ၀၀၀ ၀၀၀၀ .၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀
 ၀၀၀၀၀၀၀၀၀၀၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀၀၀၀ ၀၀ ၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀၀ ၀၀၀၀၀ ၀၀၀ ၀၀၀၀၀၀.



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***

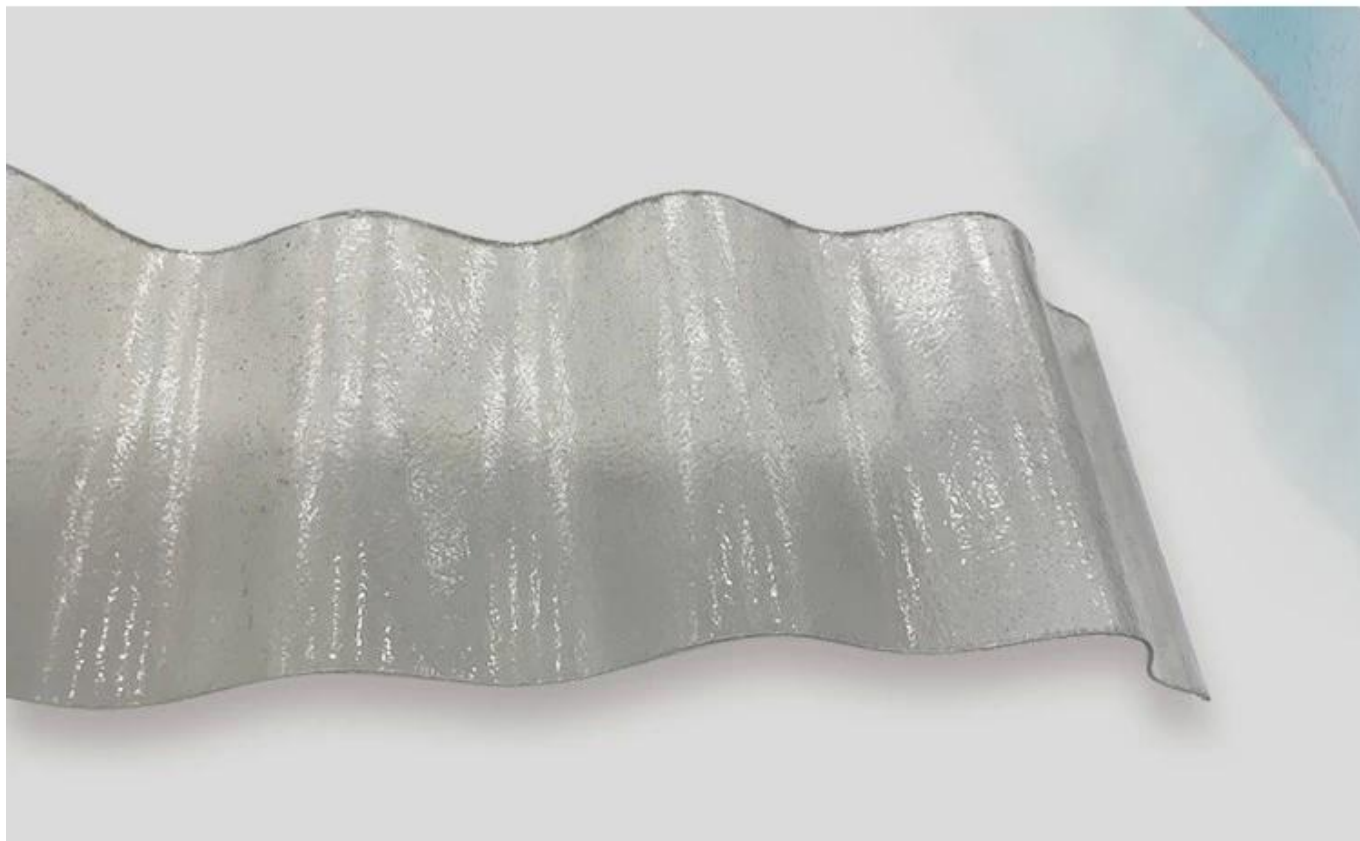


الخصائص العامة	الخصائص الفنية
النوع	01-نوع
الوزن	الوزن
الارتفاع	6000 ملم / 11800 ملم
العرض	العرض
السمك	930 ملم
اللون	840 ملم
الطلاء	660 ملم
الطلاء	1.0 ± 0.1 مم
الطلاء	1.2±0.1 مم
الطلاء	1.5±0.1 مم
الطلاء	2.0 ± 0.1 مم
الطلاء	1.7±0.1 20/مم
الطلاء	2.1±0.1 20/مم
الطلاء	2.6±0.1 20/مم
الطلاء	3.0±0.1 20/مم
الخصائص الفنية	
SQ.M./20 FCL (21 قفص)	26 قفص 40/قفص (26 قفص)
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

الخاصة بنا بالضغط على ZXC اكتشف المزيد حول منتجات

CUSTOMER CASE SHOW

Has more than ten years of production experience

[illegible]

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details



CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS “ TO CHOOSE US

Iron tiles can be directly covered



*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*



“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40° - 120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



Our Factory

Zhongxingcheng New Material Co., Ltd. 廠址設於中國廣東省佛山市南海區. 主要生產各種塑料薄膜、片材、板材、管材、異型材等。產品種類繁多，包括 ASA、APVC、PVC、FRP 等。公司設備先進，技術精良，產品質量優良，價格公道。歡迎各界人士垂詢訂購。



FACTORY REAL SHOT DISPLAY

Professional production to do every step



Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



— 01 —

ONLINE CONSULTATION

Provide professional product
consultation



— 02 —

PROVIDE PRICING

Provide reasonable price for
product performance



— 03 —

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

ORDER PRODUCTION

Professional and rapid production
of multiple production lines

— **05** —

AFTER DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00
0000 000 0000 000 00000 000 000.000000 00000 00 00000 00 000000 0000 00000000 000000 000 0000 *
.000000 000000 000000 00000 0000 00 00000 000 0000000000 000000 000000 0000000

000000 0000000 00 0000 00000 0000000 000 0000000 00*
.00000000000 000000000 000000 0000000000 0000000 000000 0000000 00000 000000 0000000*

0000000000 000 0000000 0000000000 000000000 000 000000 00 *

