



ASA	ASA
ZXC	ZXC
25	25
ISO9001 / SGS / CE /	ISO9001 / SGS / CE /
100	100
1x20GP 1 6 x40GP 7	1x20GP 1 6 x40GP 7
13500 8	13500 8
T/T %30	T/T %30
(FCL) (LCL)	(FCL) (LCL)



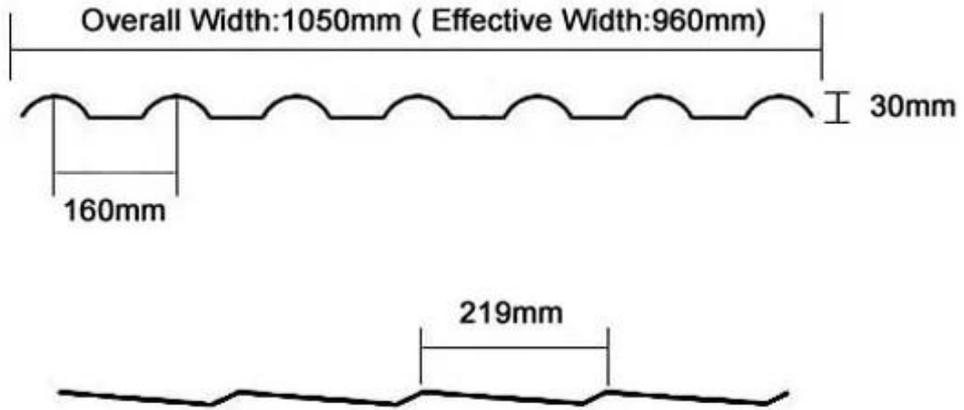

Purplish Red



Brick Red



Sky Blue




Black



Dark Green

□□□□□□ □□	#1050-160-30
□□□□	□□□□□□□□ □□□□□□
□□□□□ □□□□□	1050 □□□□
□□□□□□ □□□□□□	960 □□□□
□□□□□□	2.3 □□□□ 3.0 / □□□□ 2.8 / □□□□ 2.5 / □□□□
□□□□	□□□□□□ □□□□□□ □□□□ □□ □□□□
□□□□	□□□□□ □□□□□ / □□□□□ □□□□□ / □□□□□□ / □□□□□ / □□□□□□□□□□
□□□□□□□ □□□□□□	160 □□□□
□□□□□□□ □□□□□□□□	30 □□□□
□□□□□□ □□□□	219 □□□□



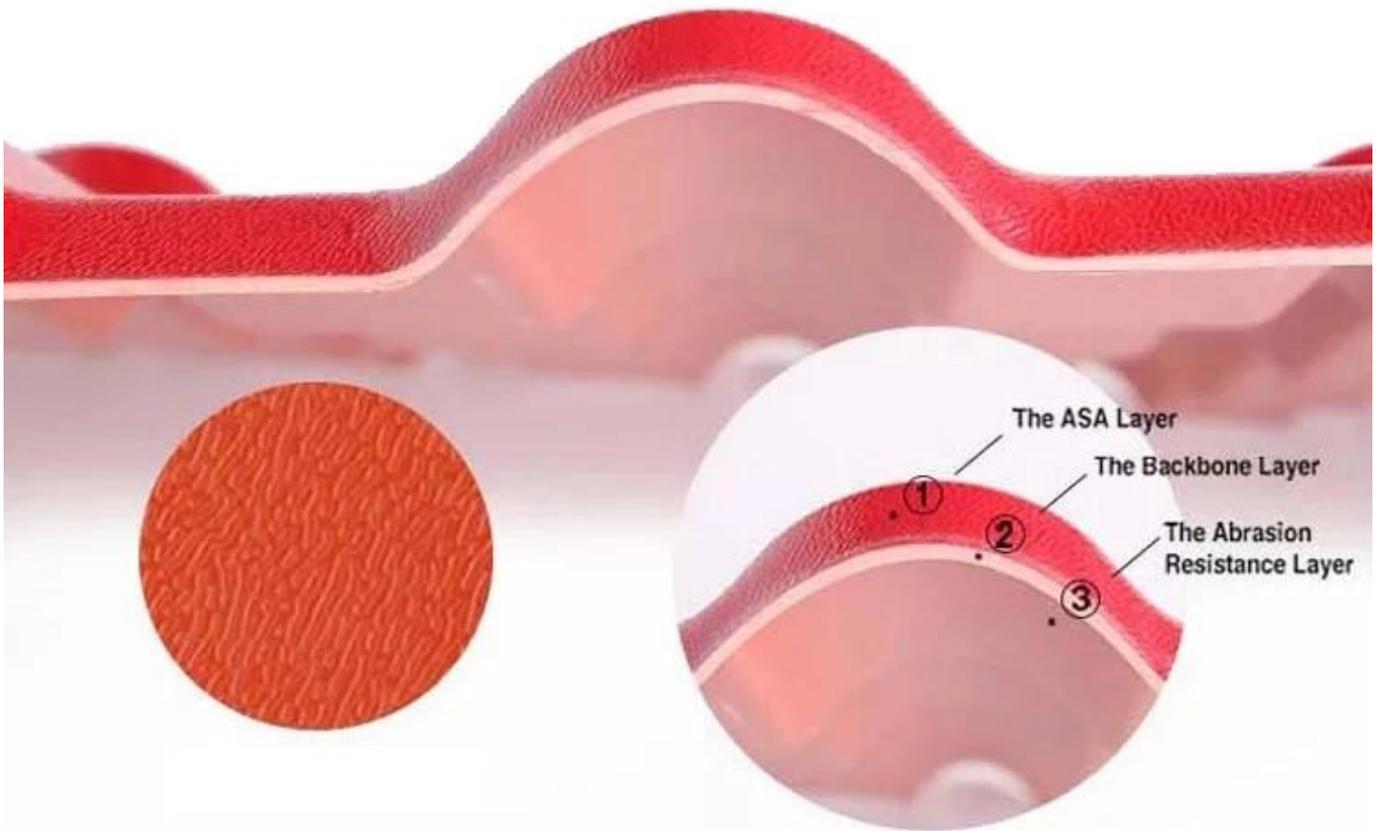

**ASA**

ASA : ASA 500 GE 10 0.18-0.15 0.15

1:1

**ASA**

**(10)**

**ASA**

**ASA**

**ASA**

•  $\geq B1$  鋼筋的屈服強度應符合 GB8624-2006 的規定。

• 鋼筋的直徑應符合設計要求

鋼筋的直徑應符合設計要求，且應符合 GB8624-2006 的規定。鋼筋的直徑應符合設計要求，且應符合 GB8624-2006 的規定。鋼筋的直徑應符合設計要求，且應符合 GB8624-2006 的規定。

• 鋼筋的直徑應符合設計要求

鋼筋的直徑應符合設計要求，且應符合 GB8624-2006 的規定。鋼筋的直徑應符合設計要求，且應符合 GB8624-2006 的規定。鋼筋的直徑應符合設計要求，且應符合 GB8624-2006 的規定。

鋼筋 直徑 應符合 ct





*Warranty 25-years*



*Warranty 25-years*



*Warranty 25-years*



*Warranty 25-years*

## ABOUT US



### **QUALITY, INNOVATION, STRUGGLE, WIN-WIN**

we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



# PRODUCTION PROCESS



① Raw Materials

② Extrusion

③ Compression Molding



④ Cutting

⑤ Finished Product

⑥ Inspection

# CERTIFICATE

Foshan Supervise Testing Centre of Quality

Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	The surface should be smooth with uniform appearance and without cracks, holes, warping, bubbles, and other defects.
2	Surface layer thickness	mm	3.0±0.1
3	Bend strength	MPa	≥20
4	Bend stress at break	N	≥300
5	Flexural strength	MPa	≥10
6	Flexural elastic modulus	MPa	≥2200
7	Density	g/cm <sup>3</sup>	1.3±0.02
8	Water soaking absorption (24h)	%	≤0.70
9	Water soaking impact (24h)	mm	The surface should be smooth and free of defects.
10	Water soaking impact (24h)	mm	≤0.50
11	Water soaking impact (24h)	mm	The surface should be smooth and free of defects.
12	Water soaking impact (24h)	mm	The surface should be smooth and free of defects.
13	Water soaking impact (24h)	mm	The surface should be smooth and free of defects.
14	Water soaking impact (24h)	mm	The surface should be smooth and free of defects.
15	Water soaking impact (24h)	mm	The surface should be smooth and free of defects.

Foshan Supervise Testing Centre of Quality

Test Report

Client: Foshan Zhongxing Plastic Factory

Product: Plastic Tile

Model: ASA-1

Test Results: All items passed.

**celab**

**CERTIFICATE**

DECLARATION OF CONFORMITY TO THE CE MARKING REQUIREMENTS

Product: Plastic Tile

Model: ASA-1

Manufacturer: Foshan Zhongxing Plastic Factory

Address: No. 30, Industry Road, Daxun, Foshan, Guangdong, China

CE Marking: CE

www.celab.com

DECLARATION FOR CONSTRUCTION PRODUCTS DIRECTIVE

On behalf of

**FOSHAN ZHONG XING CHENG PLASTIC FACTORY**

Plastic Tile

Model: ASA-1

Address: Foshan Zhongxing Plastic Factory, No. 30, Industry Road, Daxun, Foshan, Guangdong, China

By: BEER (UK) PRODUCT SERVICE LIMITED, 150, FLEET STREET, LONDON, UNITED KINGDOM

China: SF, Binye E, Huanan 3rd Ind Zone, Xitong, Bai' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 18, 2016

Date of Report: Mar. 11, 2016

Report Number: B-816530176

Appendix 1

Photo: [Image of Plastic Tile]

Photo: [Image of Plastic Tile]

