

# Product show

□□□□□□□□ □□□□□ □ □□□□□□□□  
□□□□□□ □□ □□□□□ 10 □ □□□□ □□□  
□□□□ □ □□□  
□ □□ 2.2 □ □□ 2.0 □ □□ 1.8 □ □□□  
2.5mm □ 2.8 □□□ 3.0 □ □□  
□□ 1130 □ □□□□□ □□□□□□  
□□ 1000/1050 □ □□□□ □□□  
□□□ 660 □ □□□□□□ □□□□□□  
□□□□□ 3 □ □□□□□□□  
□□□□/□□□□□ □ □□□□□□



Carrying capacity



Flame retardant



Not Conduct Electricity




Corrosion Resistance




White



Green

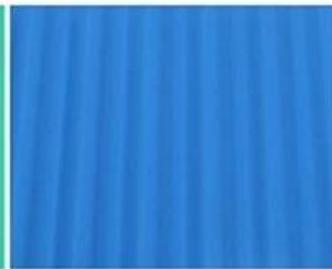

Blue

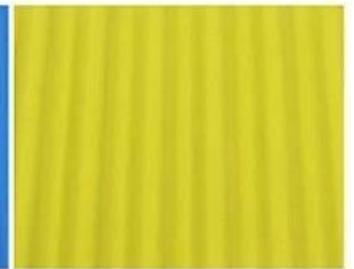

Yellow

# More Types


## 1130 corrugaetd sheets




## 1130 trapezoidal sheets




## 900 high wave

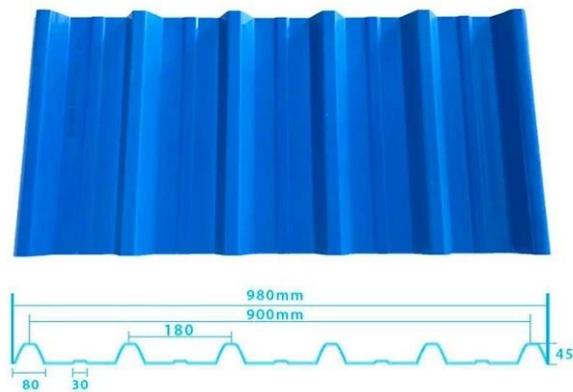

## 980 high wave

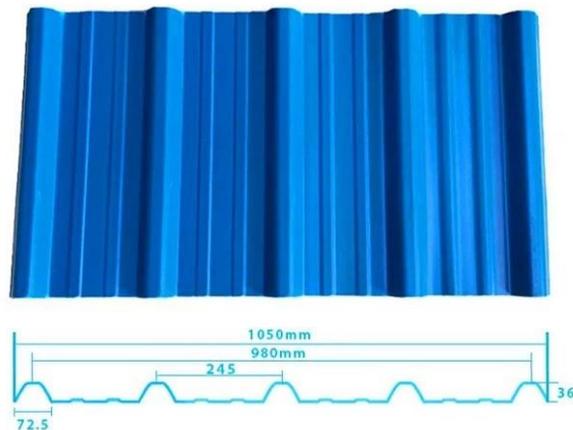


# PVC accessories

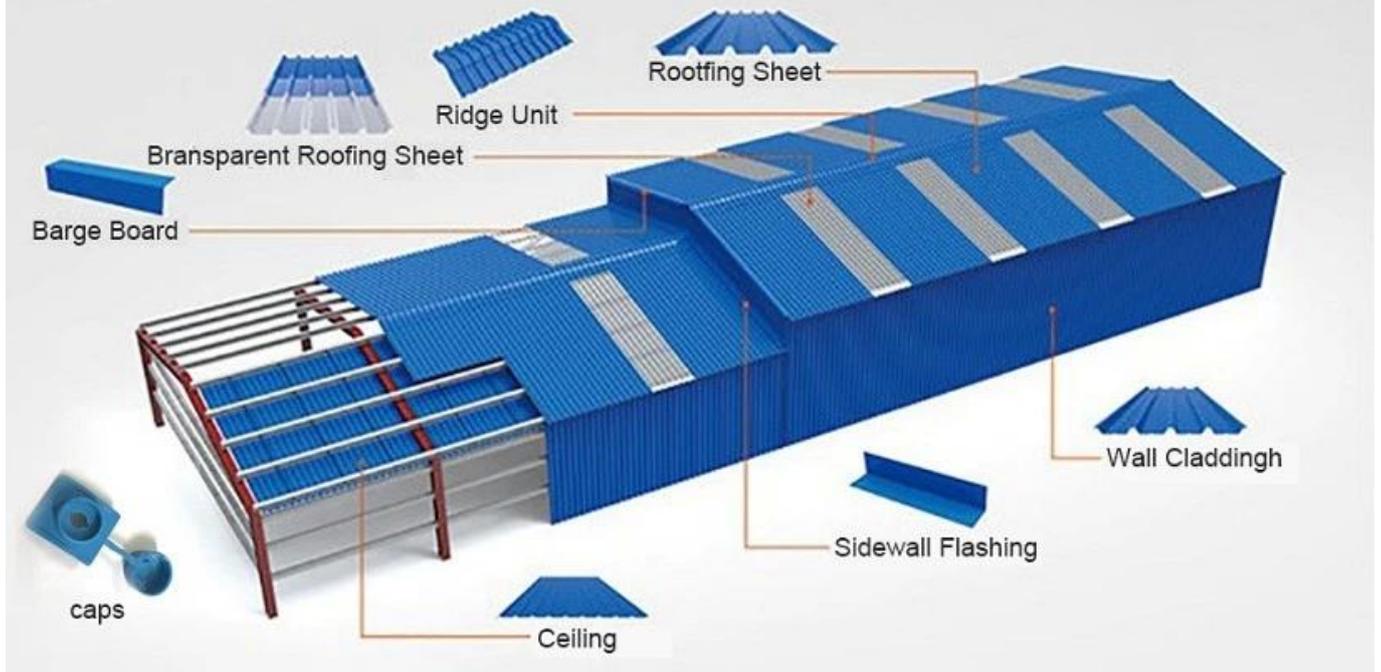


ZXC New Material Technology Co., Ltd. 專業生產各種規格 PVC 及 各種規格 鋼板 鋼管 鋼絲網 鋼絲繩 ASA 及 各種規格 鋼板 FRP 及 各種規格 鋼管 UPVC 鋼管 鋼管 .S 鋼管 鋼管 鋼管 (鋼管 鋼管) .鋼管 鋼管 鋼管 鋼管 鋼管 鋼管 鋼管 鋼管 鋼管 鋼管 PVC 鋼管 鋼管)

# Our Factory

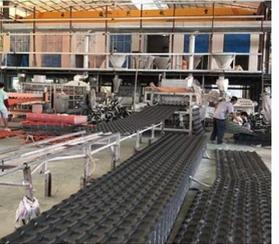

# Engineering case

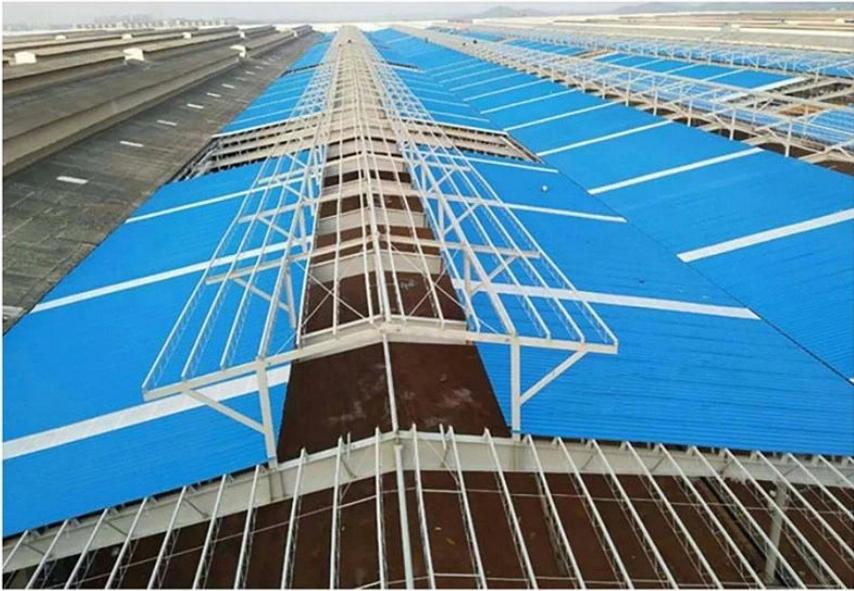

# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and tolerance on warpage.	Confirmed	Pass
2	Walk distance	mm	≤ 0	0	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Slip-resistance	1/100	---	170	Pass
5	Flexure strength	Mpa	≥ 20	30	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 20°C)	---	No significant change in water absorption permitted.	Confirmed	Pass
8	Acid resistance (5% HCl, 24h, 20°C)	---	No visible color change or delamination permitted.	Confirmed	Pass
9	Alkali resistance (5% NaOH, 24h, 20°C)	---	No visible color change or delamination permitted.	Confirmed	Pass
10	Impact resistance (1kg, 1m)	---	No visible color change or delamination permitted.	Confirmed	Pass
11	Change index	%	≤ 0.2	0.16	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	Mpa	≥ 20	26	Pass
4	Flexure strength	Mpa	≥ 20	30	Pass
5	Flexural modulus	%	≥ 20	30	Pass
6	Flexural ductility modulus	Mpa	≥ 0.020	0.020	Pass
7	Density	g/cm <sup>3</sup>	≥ 2.35	2.38	Pass
8	Water absorption (1h, 20°C)	---	No significant change in water absorption permitted.	Confirmed	Pass
9	Acid resistance (5% HCl, 24h, 20°C)	---	No visible color change or delamination permitted.	Confirmed	Pass
10	Alkali resistance (5% NaOH, 24h, 20°C)	---	No visible color change or delamination permitted.	Confirmed	Pass
11	Impact resistance (1kg, 1m)	---	No visible color change or delamination permitted.	Confirmed	Pass
12	Change index	%	≤ 0.2	0.16	Pass



# Exhibition



# Packaging



