



□□□□□□ □□□□□

1050 □□□

□□□□□

1.3 3.0 / □□□ 2.8 / □□□ 2.5 / □□□ 2.3 / □□□ 2.0 / □□□ 1.8 / □□□ 1.5 / □□□ □□□

□□□

5.8 □□□□□ □□□/□□□ 11.8/□□□

□□□

□□□□□ □□□ / □□□□□ / □□□□□ / □□□□□ / □□□□□

□□□□□□ □□□□□


210 □□□

□□□□□□ □□□□□□

24 □□□

□□□□□

□□□□□ □□□□□/□□□□□□□□/□□□□□□ □□□□□

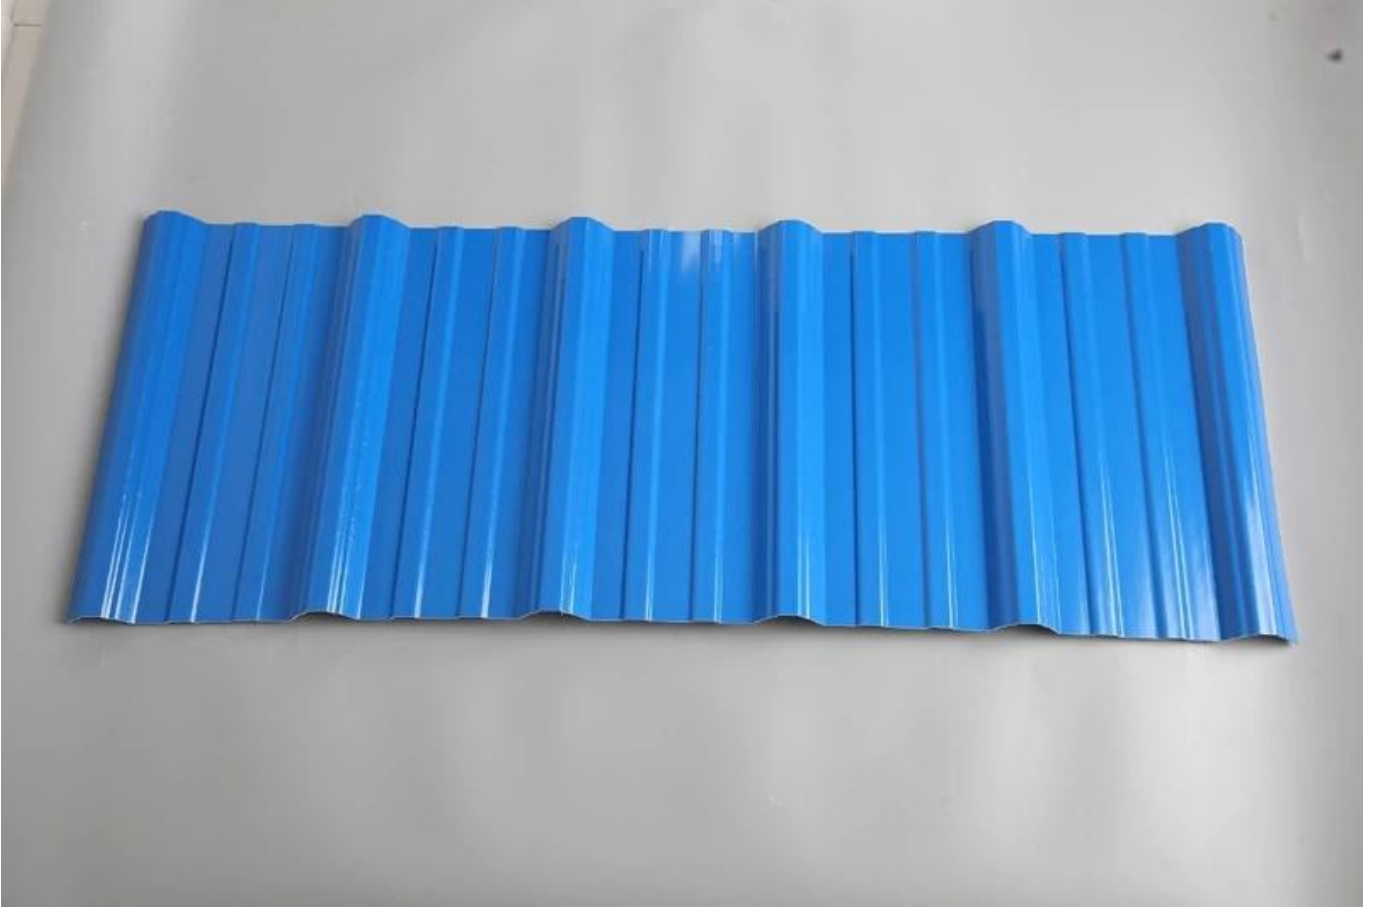





## Overview

### Product Features

ZhongXingCheng PVC offers excellent performance in terms of strength and flexibility. It is available in a range of thicknesses, typically between 0.3mm and 1.5mm. The material is highly durable and resistant to environmental factors. It is suitable for a wide range of applications, including packaging and construction. The material is also easy to process and can be cut to size using standard tools. The sheet is available in a range of colors and finishes.

### Applications

ZhongXingCheng PVC is commonly used in the following applications:

- Packaging: It is used for making flexible packaging bags and films for various products.
- Construction: It is used for making waterproofing membranes and floor coverings.
- Agriculture: It is used for making greenhouse coverings and other agricultural films.

### Quality Assurance

ZhongXingCheng PVC products are produced in strict accordance with the GB8624-2006 standard. The material is tested for its physical and chemical properties to ensure high quality and reliability. The test results show that the material's performance is consistent and meets the required standards. The test results are as follows:

### Mechanical Properties

ZhongXingCheng 0.325 mm PVC has the following mechanical properties:

Property	Value
Tensile Strength	≥ 15 MPa
Elongation at Break	≥ 200%
Modulus	≥ 1.5 GPa
Impact Strength	≥ 5 kJ/m <sup>2</sup>

### Thermal Properties

ZhongXingCheng PVC has the following thermal properties:

Property	Value
Softening Point	~130°C
Thermal Stability	≥ 30 hours at 100°C