Product show

ZXC Spanish Style <u>ASA Synthetic Resin Roof Tile</u> Wholesales, with 50 years of warranty Color include Orange / Red / Grey / Sky Blue / Dark Green








	Spanish Style ASA Roof Tile
	ZXC.
	25 [[[]]
	ISO9001 / SGS / CE/Test Report
	100 square meter
	1x20gp 1 0000 6 000x40gp 000 7 0000
	We have 8 produce lines, about 13500 square meter every day
	T/T , firstly pay 30% deposit,before loading container pay rest of payment L / $C\square$
000	Full Container Load (FCL) Service, We do it by myself.
	Pallet or PE bag
00000	Guangzhou / Shenzhen / Foshan
00000	Villa roofing,House roofing,Garden,Grange,Container house,


#1050-160-30
Spanish Style
1050mm
960mm
2.3 2.5 / [][][][mm / 2.8mm / 3.0mm
Orange / Red / Grey / Sky blue / Dark green/
160mm.
30mm.

More Types



Overall Widthe: 1050mm Effective Width: 960mm



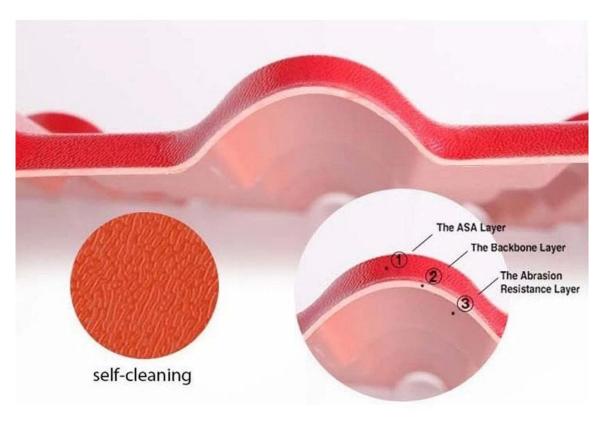

Surface:Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don,t have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bottom:The important material also is Polyvinyl chloride and Calcium powder,but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

· Long-lasting Color (at least 10 years)

· The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

· Excllent Anti-corrosion performance

· Synthetic Resin Tile can resist longterm acid ,alkali and salt corrosion ,etc. Tests have proved that there would be no chemical reaction after soaking in salt and alikali and various acid under 60% .It is ideal for application in areas where acid rain is $\square\square\square\square$.

Good Waterproofing Performance

· Synthetic Resin Tile selects highly weater-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin, s waterproof performance has greatly increased than traditional tiles.

· Strong Fire Resistance

 \cdot Belonging flame retardant material, with fire resistance \geq B1 as tested by national authoritative departments according to GBB8624-2006 standard.

Excellent Heat Insulating Property


 \cdot The heat conductivity coefficient is 0.325w/m.k,about 1/300 of clay tile ,1/50 of cement tile,and 1/2000 of thick color steel tile. Therefore without condidering ading heat-preserving layer ,the heat insulation and heat preservation of synthetic resin tile can still be optimized.

· Good sound insulation

· Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

	<u>ASA</u>	PVC	Roof S	<u>Sheet</u>	<u>Who</u> l	<u>lesa</u>	<u>les</u> ∏		
--	------------	------------	--------	--------------	--------------	-------------	--------------	--	--

resin roof tile saccessories

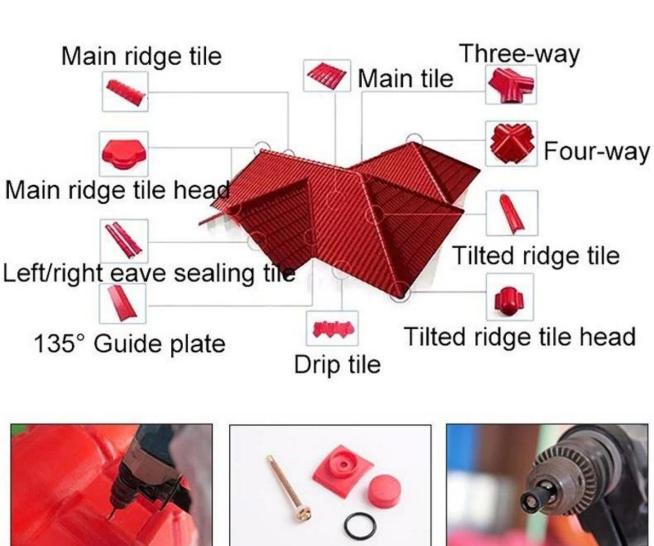



Our Factory













Engineering case













Certificate













Packaging

















FAQ

*Are you manufacturer or trader?

*Yes, we are real Manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

*Can I order the product with i want to profile?

*Of course you can, also we will produce the products according to your detail requests.

*Can you put my company's brand on your products?

*Yes, we are accept OEM&ODM service. But we need some information about your company.

- * 00000 0000 0000 00000

- *0000000 000000 00 00
- * 00000: T / T 300 00000 000 0000000 000000.
- 30 00000 000 000 7 0000 00 :0000000 00000