

Product show

ZXC ASA 色 瓦片 规格 50 瓦片 规格 / 瓦片 规格 / 瓦片 规格 / 瓦片 规格 / 瓦片 规格 . 瓦片 规格 50




□□□□□□ □□□□□□	30 □□□
□□□□□ □□□	219 □□□

More Types



resin roof tile accessories

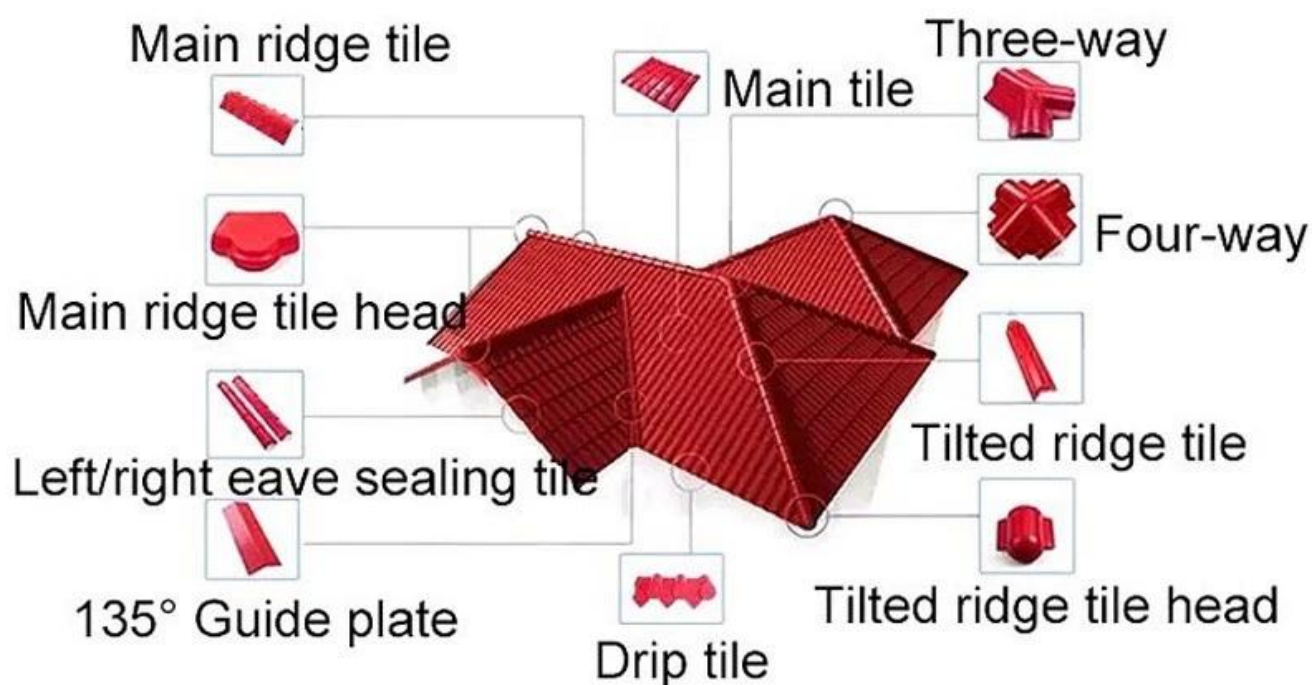

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory



Engineering case



Certificate



检验报告
Test Report

佛山市质量监督检测中心
Foshan Supervision Testing Centre of Quality and Metrology

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and both side are straight.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Slip-resistance	1/100	---	170	---
5	Flexure strength	Mpa	≥ 20	30	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 3h, 7d)	---	No pollution marks or water absorption test	Confirmed	Pass
8	Acid resistance (20%, H2SO4, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (20% NaOH, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Freeze-thaw resistance (open/closed cycle 50 cycles)	mm	≤ 1.5	1.2	Pass
11	Change index	%	≤ 0.1	0.06	Pass

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	Mpa	≥ 20	26	Pass
4	Flexural strength	Mpa	≥ 20	26	Pass
5	Flexural modulus	%	≥ 20	30	Pass
6	Flexural strength	Mpa	≥ 20	30	Pass
7	Slip-resistance	1/100	---	170	---
8	Water absorption (1h, 3h, 7d)	---	No pollution marks or water absorption test	Confirmed	Pass
9	Acid resistance (20%, H2SO4, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Alkali resistance (20% NaOH, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
11	Freeze-thaw resistance (open/closed cycle 50 cycles)	mm	≤ 1.5	1.2	Pass
12	Change index	%	≤ 0.1	0.06	Pass
13	Water absorption	%	≤ 0.05	0.03	Pass
14	Flexural strength	Mpa	≥ 20	26	Pass
15	Flexural modulus	%	≤ 0.1	0.06	Pass



质量管理体系认证证书
Quality Management System Certificate

佛山市南海区众兴塑料制品有限公司
Foshan Nanhai Zhongxing Plastic Factory

认证范围 Scope:
生产及销售 佛山南海区众兴塑料制品有限公司
Manufacturing & Sales

认证标准 GB/T19001-2008/ISO9001:2008

发证机构 深圳中检认证有限公司
Certification Body: SZJZ



Beide

APPLICATION FOR CONSTRUCTION PRODUCTS DIRECTIVE

On Behalf of
FOSHAN ZHONG XING CHENG PLASTIC FACTORY
Plastic Tile
Model: ASA-1

Prepared For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY
No. 26, Industry Road, Danzai, Foshan, Guangdong, China

Prepared By: BEIDE (UK) PRODUCT SERVICE LIMITED
U.K. FLAT 107, 25 INDESOON SQUARE, LONDON, UNITED KINGDOM
CHINA: 6F, Bldg E, Hound 3rd Ind Zone, Xixiang, Bao' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 18, 2016
Date of Report: Mar. 11, 2016
Report Number: B-61020178



celab

CERTIFICATE

Product Name: ASA-1, PAVE, APAC, APAC-1, APAC-1, PAVE, PAVE-1
Model No: ASA-1, PAVE, APAC, APAC-1, PAVE, PAVE-1
Manufacturer: FOSHAN ZHONG XING CHENG PLASTIC FACTORY
Address: No. 26, Industry Road, Danzai, Foshan, Guangdong, China
Supplier Code: B-61020178

Prepared For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY
No. 26, Industry Road, Danzai, Foshan, Guangdong, China

Prepared By: BEIDE (UK) PRODUCT SERVICE LIMITED
U.K. FLAT 107, 25 INDESOON SQUARE, LONDON, UNITED KINGDOM
CHINA: 6F, Bldg E, Hound 3rd Ind Zone, Xixiang, Bao' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 18, 2016
Date of Report: Mar. 11, 2016
Report Number: B-61020178

www.celab.com

Packaging



