




ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***

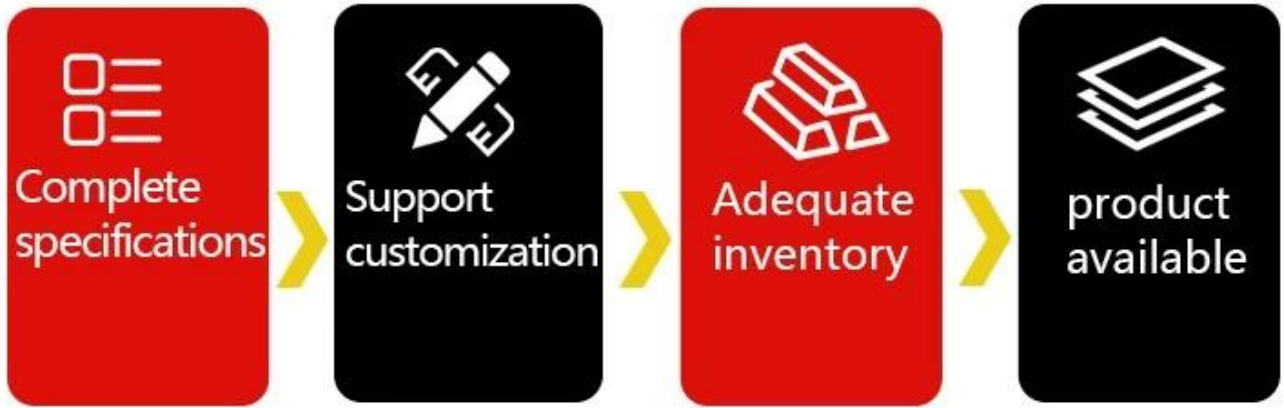


الخصائص	القيمة
الرقم	01-000
الوصف	المنتجات
الكمية	6000 منتجات / 11800 منتجات
الوزن	المنتجات / المنتجات
الارتفاع	930 ملم
العرض	840 ملم
العمق	660 ملم
السمك	1.0 ± 0.1 ملم
	1.2±0.1 ملم
	1.5±0.1 ملم
	2.0 ± 0.1 ملم
السمك	1.7±0.1 20/000
	2.1±0.1 20/000
	2.6±0.1 20/000
	3.0±0.1 20/000
المنتجات / المنتجات	
SQ.M./20 FCL (21 متر مربع)	26 متر مربع / 40/المنتجات
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

الخاصة بنا بالضغط على ZXC اكتشف المزيد حول منتجات

CUSTOMER CASE SHOW

Has more than ten years of production experience

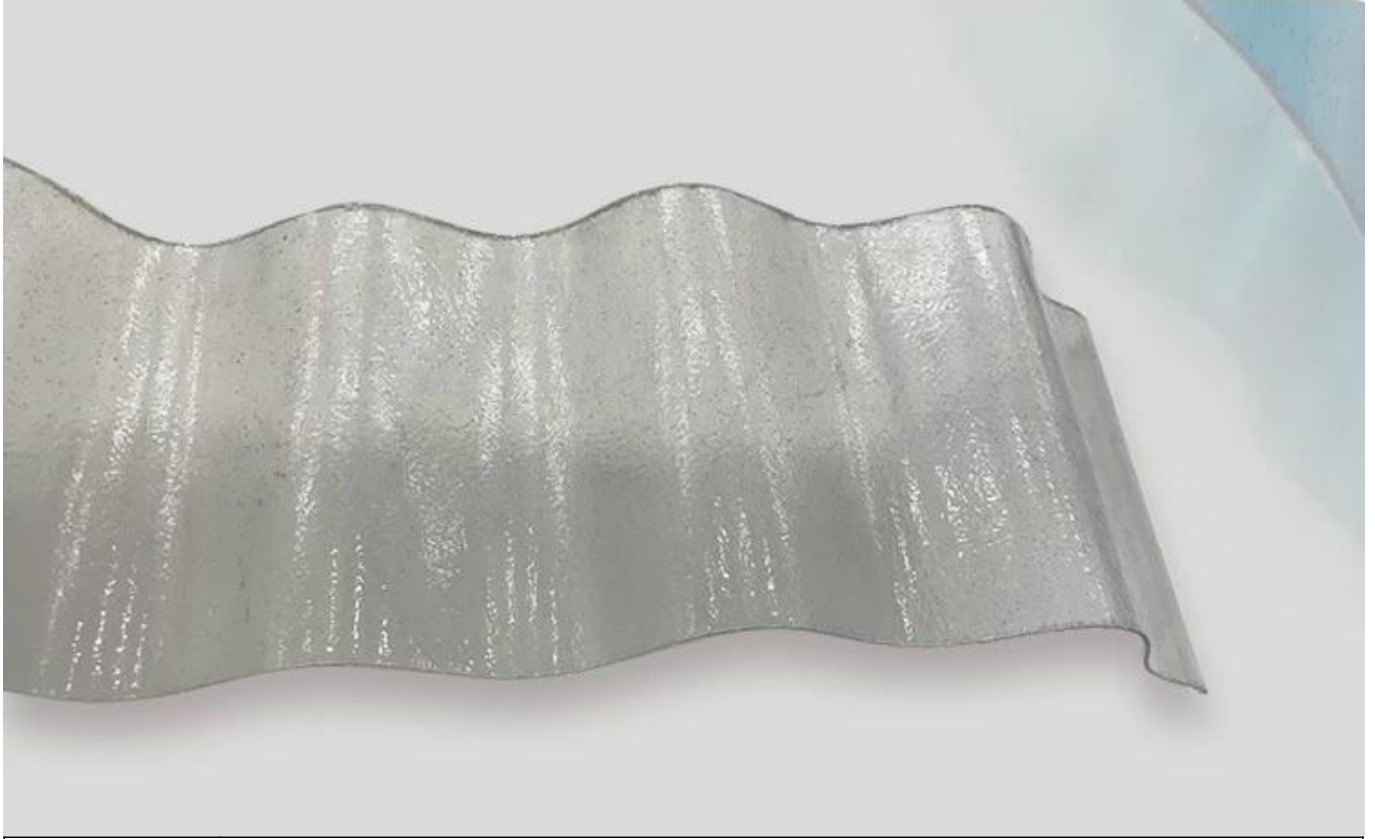

厚度:	1.0 mm 2.8 - mm
宽度:	1130/ 930/ 900/ 840 mm
长度:	可定制长度
表面处理:	镀锌 镀锡 镀镍 镀铬
其他规格:	可定制
其他信息:	本产品广泛应用于各种工业领域，如汽车、电子、建筑等。具有耐腐蚀、强度高、使用寿命长等特点。如有需要，请垂询。

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue




grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

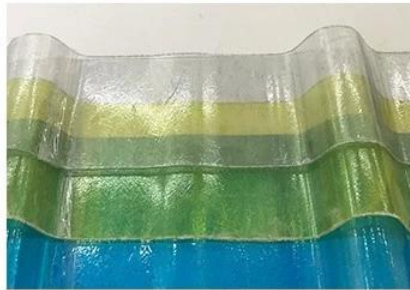

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation


*High
temperature
resistance*

*anti
-stress*

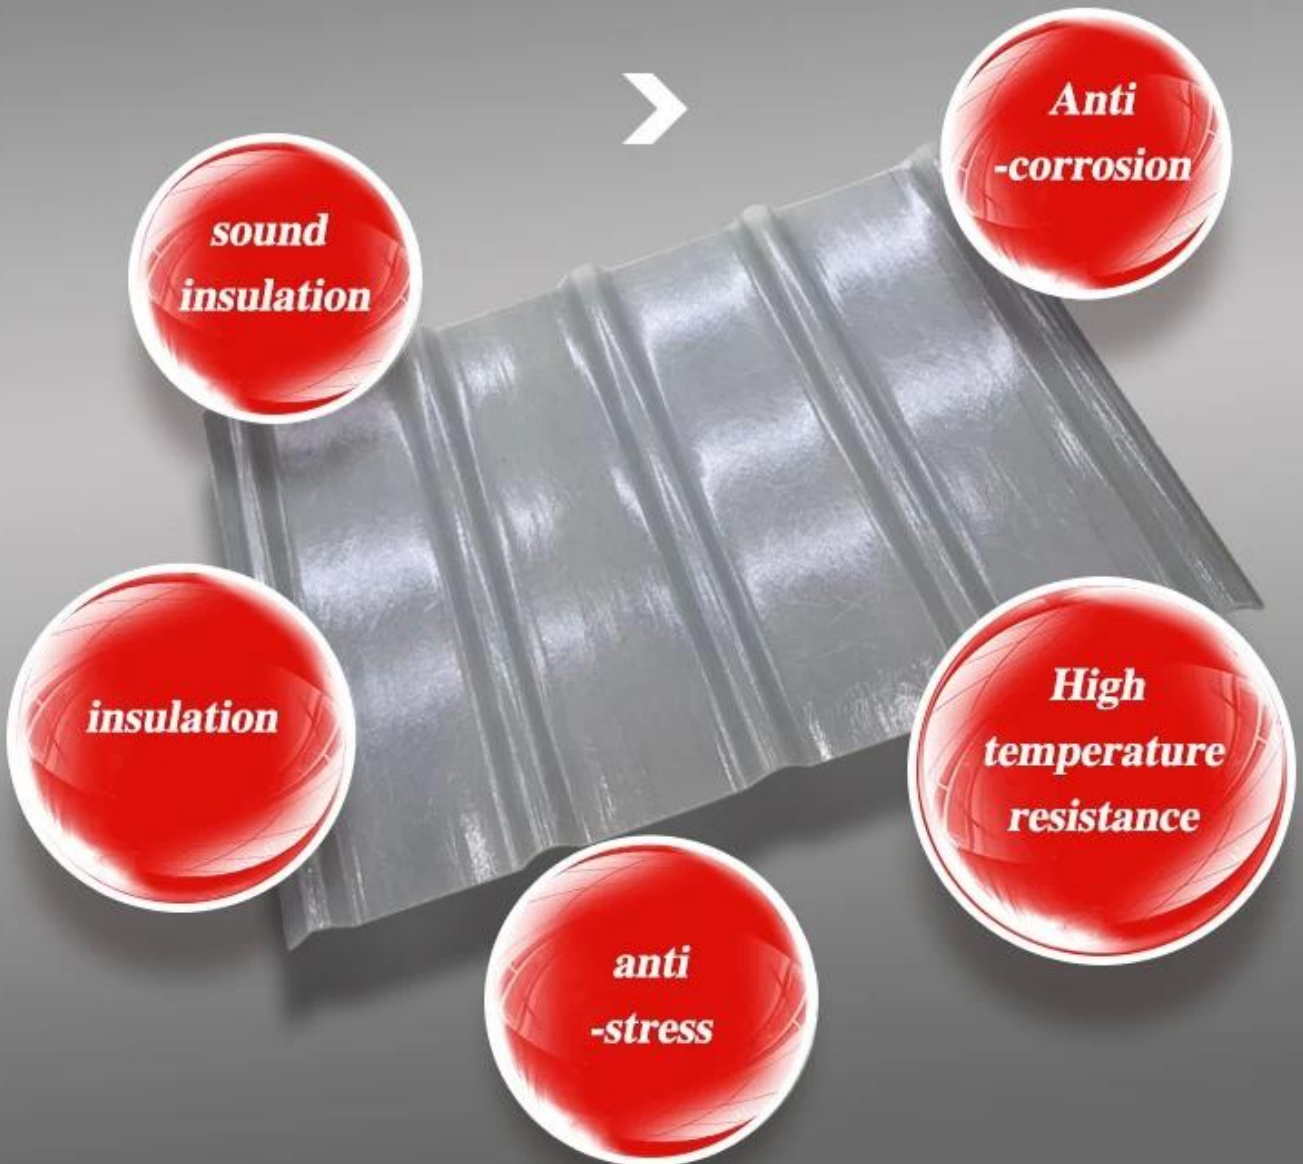

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

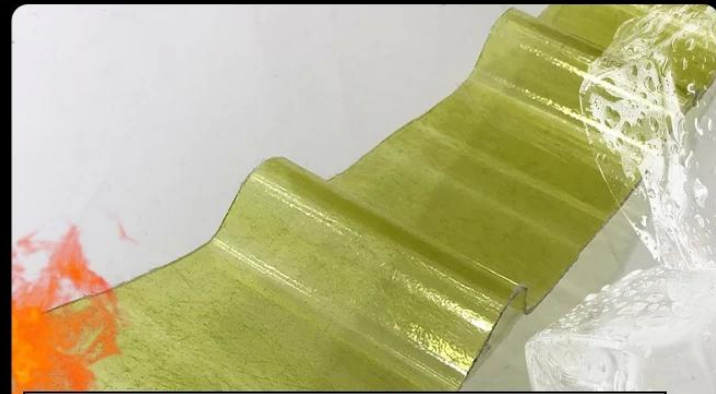

01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break




05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



FACTORY REAL SHOT DISPLAY

Professional production to do every step

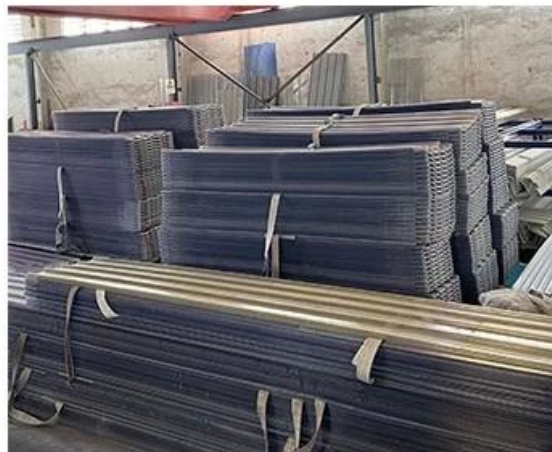

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



01

ONLINE CONSULTATION

Provide professional product
consultation



02

PROVIDE PRICING

Provide reasonable price for
product performance

03

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

**ORDER
PRODUCTION**

Professional and rapid production
of multiple production lines

— **05** —

**AFTER
DELIVERY**

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00
 0000 000 0000 000 00000 000 000 .000000 00000 00 00000 00 000000 0000 00000000 000000 000 0000 *
 .000000 000000 000000 00000 0000 00 00000 000 000000000 000000 000000 0000000

00000 000000 00 0000 0000 000000 000 0000000 00*
 .0000000000 00000000 000000 000000000 000000 000000 000000 00000 000000 00000 000000 000000*

000000000 000 0000000 000000000 000000000 000 000000 00 *

. *

. *

. *

. *

. *

. *

. *

30 7 •

. : •