





ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

# FRP LIGHTING ROOF TILE



***10-year  
warranty***




الخصائص العامة	الخصائص الفنية ورقة FRP-01	
الرمز	frp-01	
الوزن	6000 ورقة ورق FRP 11800 كجم	
السمك	السمك المسموح به من 0.930 إلى 1.030	
السمك الاسمي	930 ميكرومتر	
الوزن الاسمي	840 ميكرومتر	
الوزن الفعلي	660 ميكرومتر	
المتانة	1.0 ± 0.1 كجم	
	1.2 ± 0.1 كجم	
	1.5 ± 0.1 كجم	
	2.0 ± 0.1 كجم	
المتانة	1.7 ± 0.1 2 كجم / ورقة	
	2.1 ± 0.1 2 كجم / ورقة	
	2.6 ± 0.1 2 كجم / ورقة	
	3.0 ± 0.1 2 كجم / ورقة	
الخصائص الميكانيكية		
SQ.M./20 (21 ورقة)	SQ.M./40 (26 ورقة)	
12000 2 كجم	15000 2 كجم	
10000 2 كجم	12300 ورقة ورق	
8000 2 كجم	10000 2 كجم	
7000 2 كجم	8600 2 كجم	

انقر [واضح المموج ورقة المورد الصين](#) لتعلم المزيد

# CUSTOMER CASE SHOW

Has more than ten years of production experience

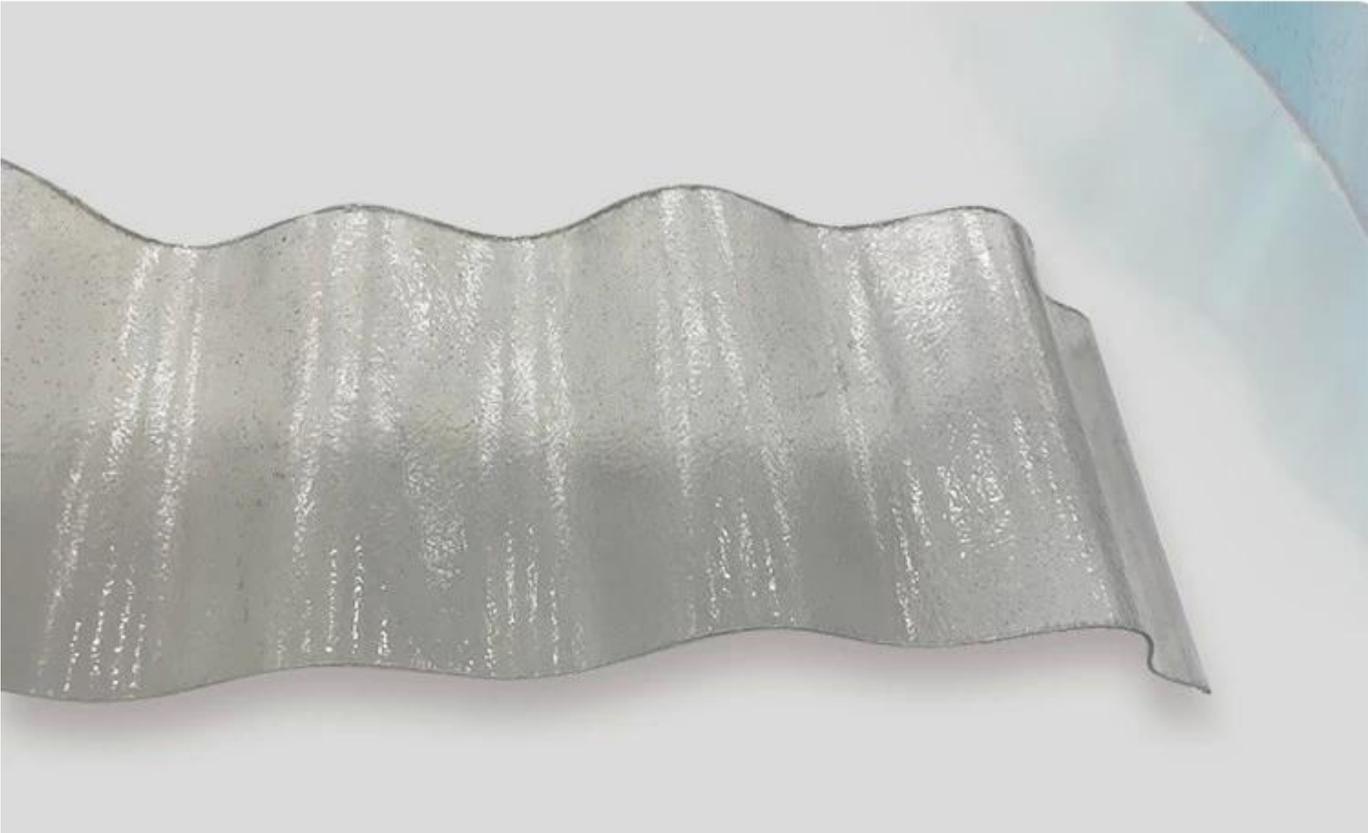

厚度:	1.0 mm 2.8- mm
宽度:	1130/930/900/840 mm
长度:	可定制长度
表面处理:	拉丝、镜面、喷砂、氧化
应用:	装饰、工业
其他信息:	该产品采用优质材料，具有良好的耐腐蚀性和机械性能。可根据客户需求进行定制，交货期短，服务周到。

# A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

---

# PRODUCT DISPLAY

Authentic product photography highlights the quality of details



# CUSTOMER CASE SHOW

More than ten years of production experience



# APPLICABLE SCENE DISPLAY

scope of application

~



## *planting shed*

Rainproof, constant temperature  
moisturizing space, transparent



## *roof*

Good light transmission  
performance, no rain leakage



## *Villa shed*

Bright colors, more class



## *Recreation area*

Color unevenness due to weathering

# SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered




*sound  
insulation*

*Anti  
-corrosion*

*insulation*


*High  
temperature  
resistance*

*anti  
-stress*

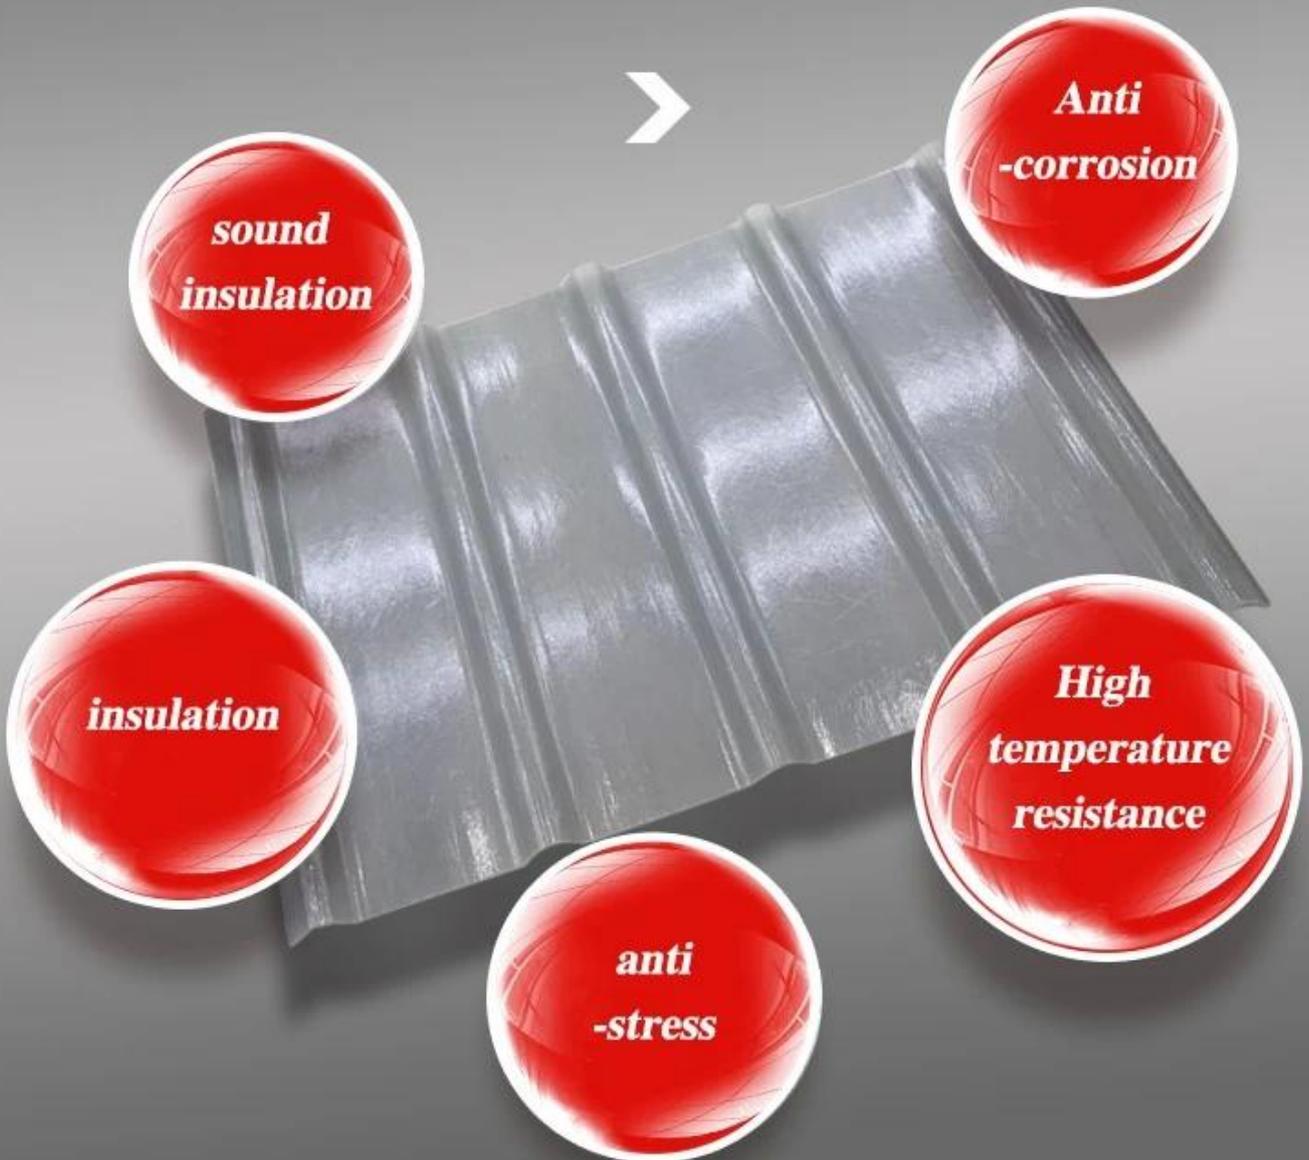

# “ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

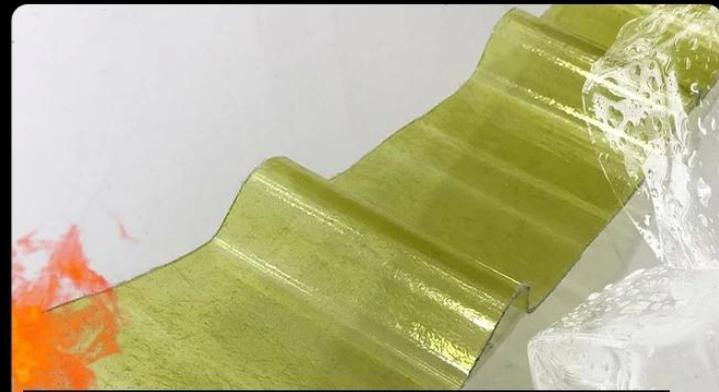

**01** High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



**02** Strong bearing capacity, more impact resistance

Add high quality glass fiber



**03** Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



## **04** Impact resistance

Shock resistant, not easy to break



## **05** Good flame retardant performance

Maintain stable performance in the temperature range of  $-40^{\circ}$ - $120^{\circ}$  without softening



**06**

## Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.

## Our Factory

公司 Zhongxingcheng New Material Co., Ltd. 位于 佛山 南海区 China 生产 各种 塑料 材料  
包括 ASA 塑料 板 和 APVC 塑料 板 以及 PVC 塑料 板 和 PVC 塑料 管 还有 FRP 塑料 管 和 PC 塑料 板



# FACTORY REAL SHOT DISPLAY

Professional production to do every step



# Sampling and testing each batch of products to ensure quality

X



DISPLAY

# CUSTOM PROCESS

Easy shopping, quality assurance,  
after-sales rest assured



01

## ONLINE CONSULTATION

Provide professional product  
consultation



02

## PROVIDE PRICING

Provide reasonable price for  
product performance

03

## PREPAID CUSTOMIZATION

Deposit in advance according  
to different proportions





— **04** —

**ORDER  
PRODUCTION**

Professional and rapid production  
of multiple production lines

— **05** —

**AFTER  
DELIVERY**

Intimate and assured after-sales  
service



**Exhibition**



# Certificate

# Security sense of authoritative testing

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



# Packaging



# FAQ

\* 00000 00 0000 000 00  
 0 000 000 0000 000 00000 000 0000 .0000000 000000 00 000000 00 0000000 00000 0 00000000 0000000 0000 0 0000 \*

0000 00000000 0000 0000 0000000 000 0000000 00 \*

000000000 000 0000000 0000000000 00000000 000 000000 00 \*

