



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***



الخصائص	المتطلبات
الارتفاع	01-02
العرض	العرض
العمق	6000 العرض 11800 العرض
الوزن	الوزن
المتانة	930 العرض
المتانة	840 العرض
المتانة	660 العرض
المتانة	1.0 ± 0.1 العرض
	1.2±0.1 العرض
	1.5±0.1 العرض
	2.0 ± 0.1 العرض
المتانة	1.7±0.1 20/العرض
	2.1±0.1 20/العرض
	2.6±0.1 20/العرض
	3.0±0.1 20/العرض
المتانة	
SQ.M./20 FCL (21 العرض)	العرض 26 العرض 40/العرض العرض
12000 20	15000 20
10000 20	12300 20
8000 20	10000 20
7000 20	8600 20

نحن نقدم خدمات مخصصة منخفضة السعر، إذا كان لديك أي احتياجات [مورد الصفائح FRP](#) (لبلاط السقف، فلا تتردد في الاتصال بنا للمبيعات [!المموجة في الصين](#)) أو اترك لنا رسالة

CUSTOMER CASE SHOW

Has more than ten years of production experience



厚度:	1.0 mm 2.8 - mm
宽度:	1130/ 930/ 900/ 840 mm
长度:	可定制长度
重量:	可定制重量
表面处理:	可定制
其他要求:	可定制其他要求

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue




grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

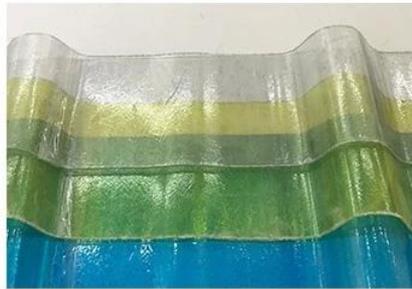

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation


*High
temperature
resistance*

*anti
-stress*

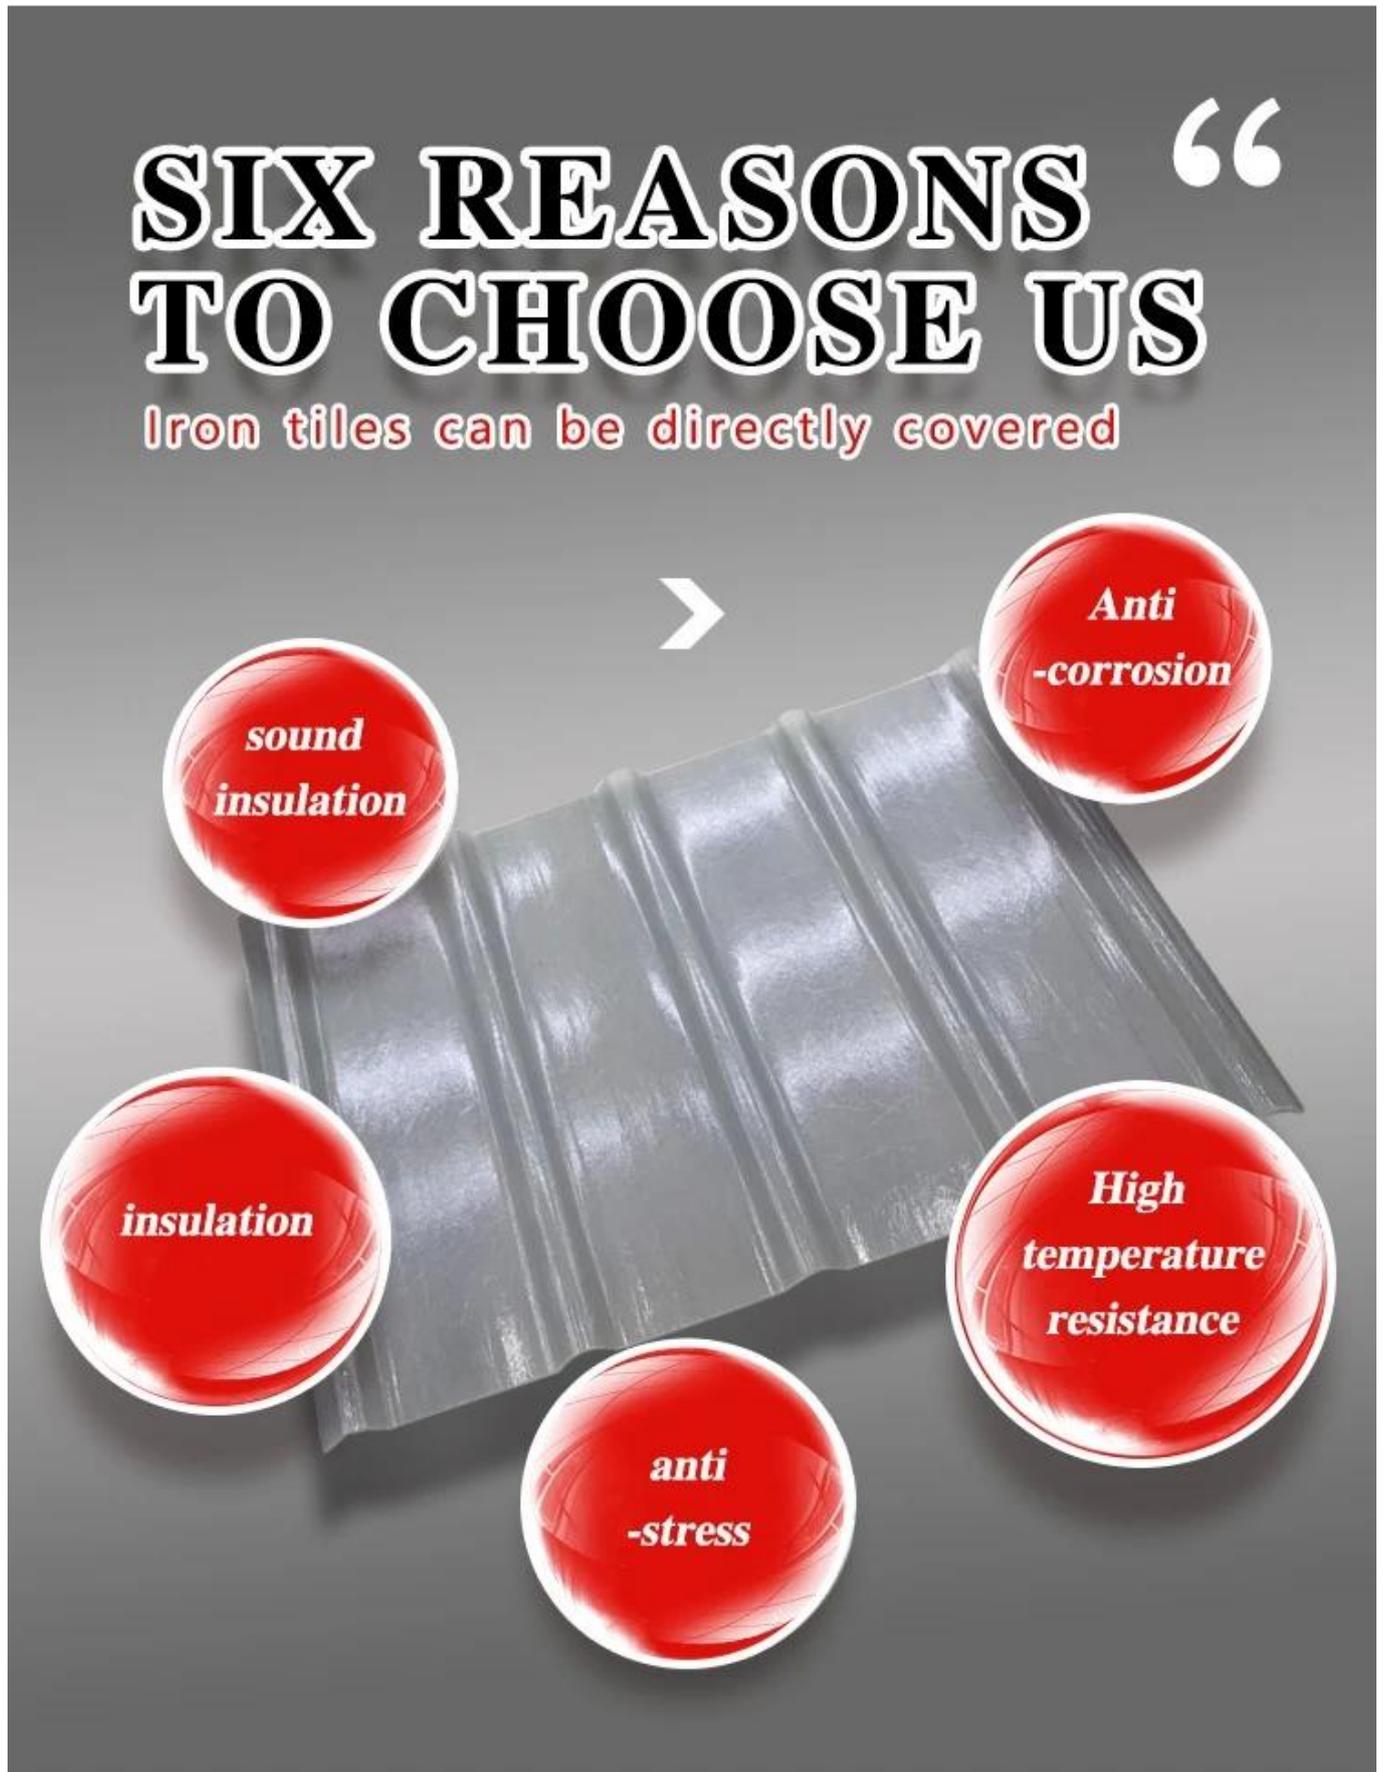

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

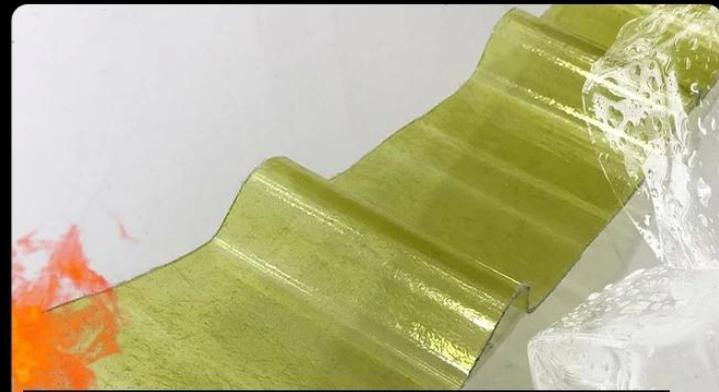

01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



06

Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.

Our Factory

Zhongxingcheng New Material Co., Ltd. 公司位于中国广东省佛山市南海区. 我们专业生产各种塑料薄膜, 包括 ASA, APVC, PVC, 以及 FRP 等. 我们的产品广泛应用于农业、工业和建筑领域.



FACTORY REAL SHOT DISPLAY

Professional production to do every step



Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



01

ONLINE CONSULTATION

Provide professional product
consultation



02

PROVIDE PRICING

Provide reasonable price for
product performance

03

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

**ORDER
PRODUCTION**

Professional and rapid production
of multiple production lines


— **05** —

**AFTER
DELIVERY**

Intimate and assured after-sales
service



Exhibition

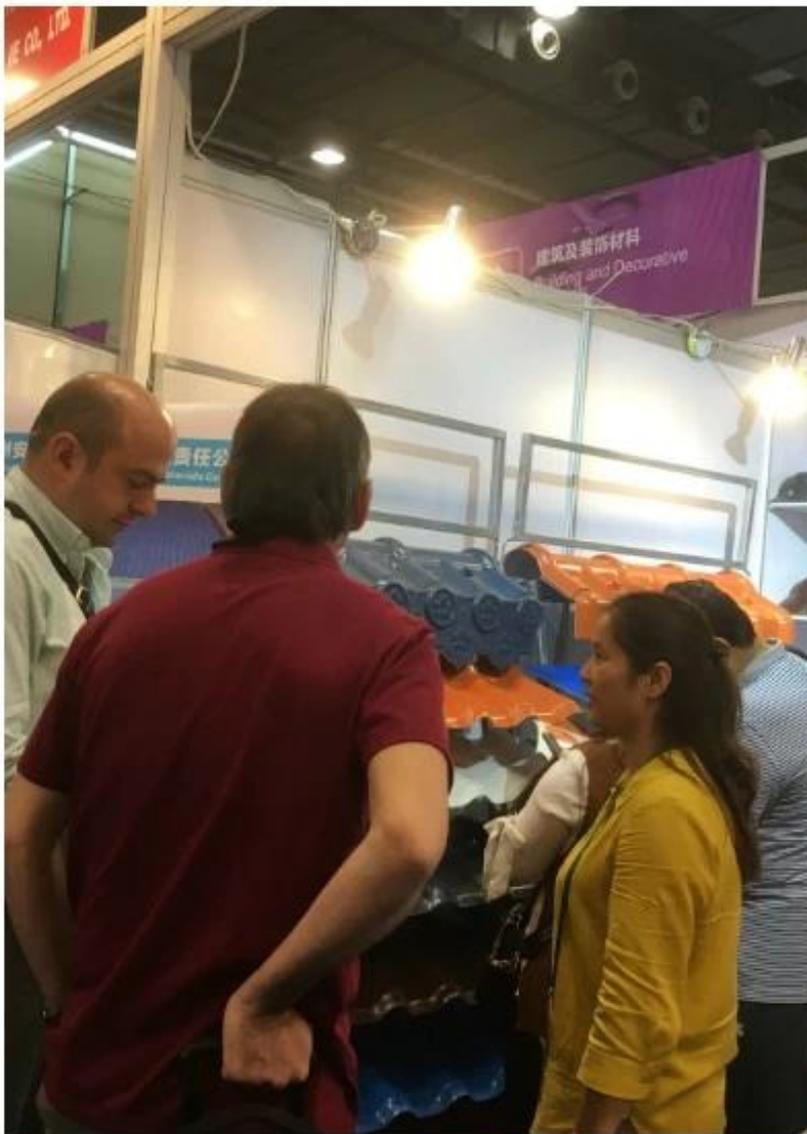

Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

* 00000 00 0000 000 00

0000 000 0000 000 000000 000 000. 0000000 000000 00 000000 00 0000000 00000 000000000 0000000 000 00000 *

.0000000 0000000 0000000 000000 00000 000 0000000000 000000 000000 0000000

000000 0000000 00 0000 00000 0000000 000 0000000 00*

.00000000000 000000000 000000 0000000000 0000000 000000 0000000 00000 000000 00000 0000000*

000000000 000 0000000 0000000000 000000000 000 000000 00 *

. *

. *

. *

. *

. *

. *

. *

30 7 •

. •