

Product show



1. Una variedad de materias primas por un cierto porcentaje de mezcla, en la tolva



2. Las materias primas mixtas son preferidas. -
ormado y calentado para convertirse en tejas planas





3. Luego, a través de la presión del molde, lastic el
moldeado, enfriamiento, a través de la máquina de
tracción introducida lentamente




4. Para lograr la longitud de las necesidades del
cliente cortar. después de la salida artificial





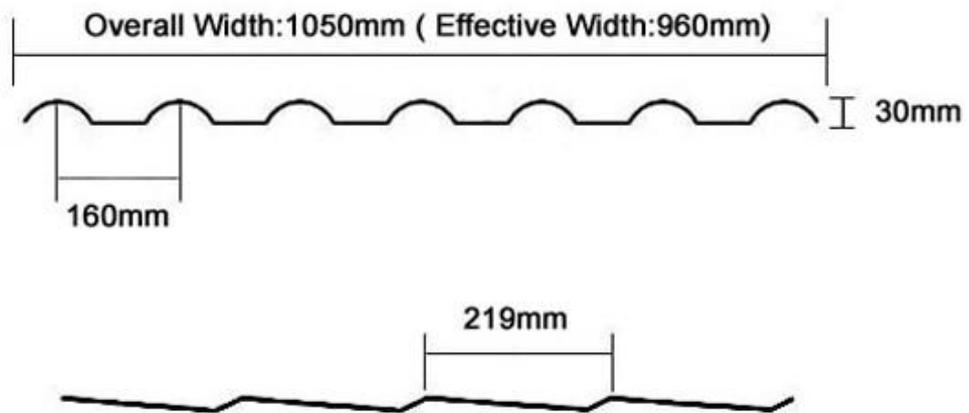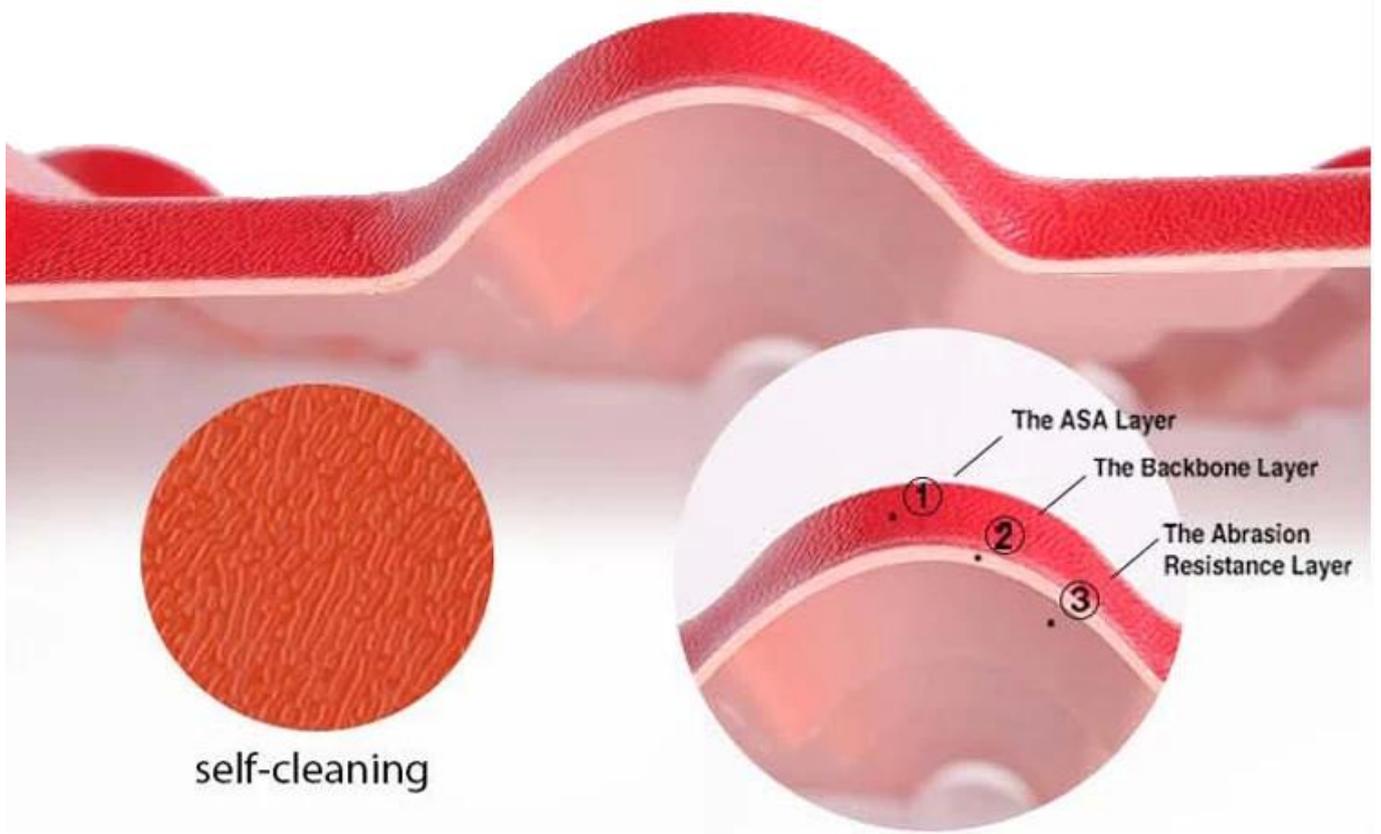

Purplish Red



Brick Red



Sky Blue




Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

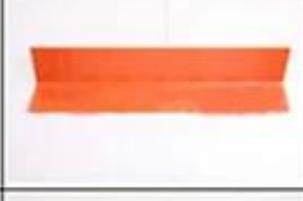Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

Accessories





Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Wall thickness	mm	0.2	0.2	Pass
3	Thickness deviation	mm	±0.02	±0.02	Pass
4	Density	g/cm ³	---	1.170	---
5	Tensile strength	MPa	≥1.0	1.0	Pass
6	Elongation at break	%	≥2.0	2.0	Pass
7	Falling ball impact (1kg, 1m)	---	No penetration, cracks or marks after impact test.	Confirmed	Pass
8	Anti-static (ESD)	---	No obvious static charge on the surface.	Confirmed	Pass
9	Flammability (UL94)	---	Self-extinguishing.	Confirmed	Pass
10	Flammability (UL94)	---	No obvious static charge on the surface.	Confirmed	Pass
11	Flammability (UL94)	---	Self-extinguishing.	Confirmed	Pass
12	Flammability (UL94)	---	Self-extinguishing.	Confirmed	Pass
13	Flammability (UL94)	---	Self-extinguishing.	Confirmed	Pass
14	Flammability (UL94)	---	Self-extinguishing.	Confirmed	Pass
15	Flammability (UL94)	---	Self-extinguishing.	Confirmed	Pass

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface.	Confirmed	Pass
2	Surface roughness	mm	0.1	0.1	Pass
3	Tensile strength	MPa	≥1.0	1.0	Pass
4	Elongation at break	%	≥2.0	2.0	Pass
5	Flexural strength	MPa	≥1.0	1.0	Pass
6	Flexural modulus	MPa	≥1.0	1.0	Pass
7	Density	g/cm ³	---	1.170	---
8	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
9	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
10	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
11	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
12	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
13	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
14	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass
15	Heat stability (TGA)	---	No weight loss at 300°C for 2 hours.	Confirmed	Pass



Our Factory





Our Customer



Packaging



FAQ

* ¿Es usted fabricante o comerciante?

* Sí, somos fabricantes reales, Hay muchas imágenes en la introducción de nuestra empresa. si necesita otro producto especial, haremos todo lo posible para ayudarlo, para que podamos construir una relación comercial a largo plazo.

* ¿Puedo pedir el producto con el que quiero perfilar?

* Por supuesto que puede, también produciremos los productos de acuerdo con sus solicitudes detalladas.

* **¿Pueden poner la marca de mi empresa en sus productos?**

* **Sí, aceptamos el servicio OEM y ODM. Pero necesitamos información sobre su empresa.**

* **¿Cómo instalar la lámina para techos?**

* **Póngase en contacto con nuestro personal de servicio, tenemos un video de instalación para usted.**

* **¿Puede proporcionarme muestras para abrir el mercado y probar? ¿calidad?**

* **Sí, podemos. Podemos proporcionarle muestras gratuitas. ¿Podría pagar el costo de envío? Póngase en contacto con nuestro personal de servicio.**

* **¿Cuál es su término comercial?**

* **Pago: T/T 30% por adelantado, saldo antes del envío.**

• **Plazo de entrega de producción: dentro de los 7 días hábiles posteriores al depósito del 30%**

• **Puerto de envío FOB: Foshan, Guangzhou, Shenzhen**