

# Product show

Diseño: Estilo español  
Color Duradero: 10 años Sin desvanecimiento  
Longitud: personalizado  
Grosor: 1.8mm, 2.0mm, 2.2mm,  
2.5mm, 2.8mm, 3.0mm.  
Ancho general: 1130mm  
Ancho efectivo: 1000 / 1050mm.  
Espacio de Purlin: 660mm  
Capas: 3 capas.  
Superficie: relieve / smoothsurface



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

# More Types

## 1130 corrugaetd sheets



## 1130 trapezoidal sheets




## 900 high wave



## 980 high wave



# PVC accessories

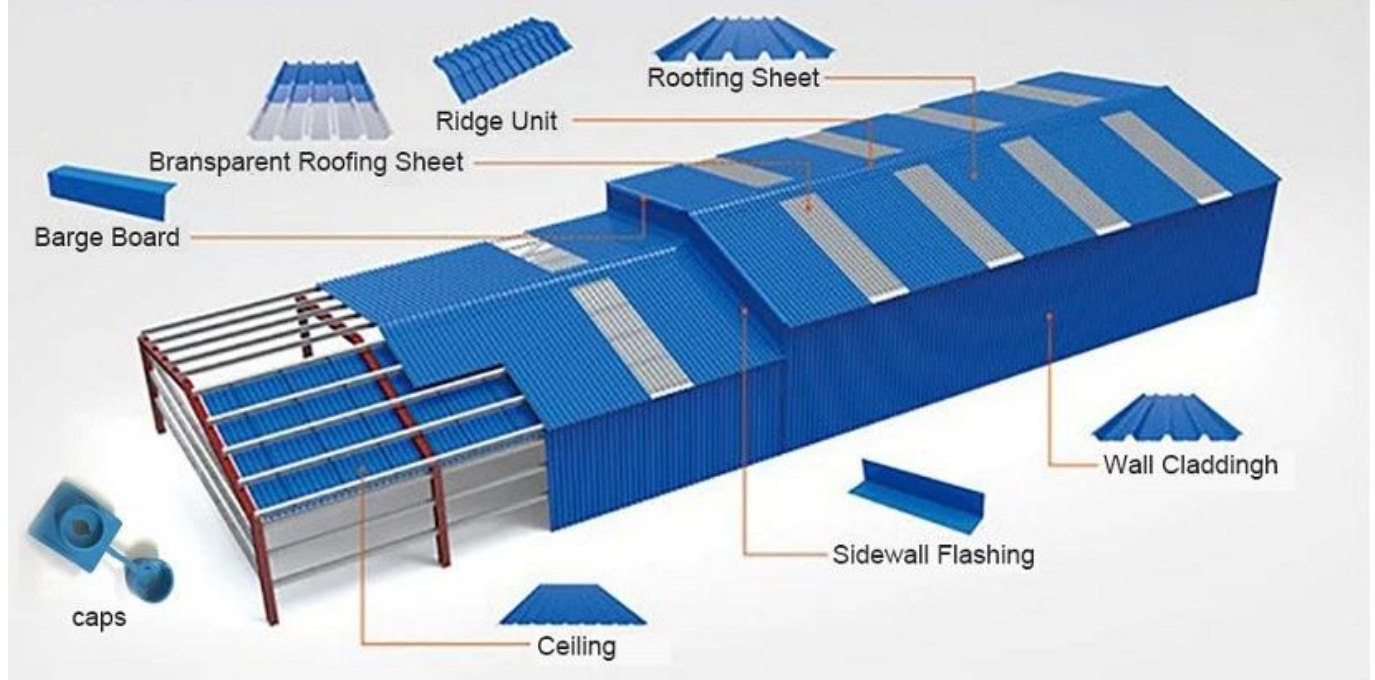

ZXC New Material Technology Co., Ltd. Nuestros productos incluyen hojas de PVC, baldosas de techo de resina sintética ASA, baldosas para techos de FRP, canaleta, láminas de techado UPVC, etc. Si su pedido coincide conS nuestros detalles del tamaño de stock, podemos un tiempo de entrega más rápido. Bienvenido Contáctenos Custom.

# Our Factory



# Engineering case



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology  
Test Report  
No. 03-14-0706

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no cracks, pits or other defects on the surface. Edge of the tile should be clean without burr. Warpage should be less, and hydrolysis no swelling.	Conformed	Pass
2	Walk distance	mm	≤ 3	8	Pass
3	Thickness deviation	mm	± 0.2	0.12	Pass
4	Skewness	mm/m <sup>2</sup>	---	0.08	Pass
5	Breakage strength	N/m <sup>2</sup>	≥ 20	26	Pass
6	Flexural strength	%	≥ 20	32	Pass
7	Water absorption (1h)	%	≤ 0.3	0.2	Pass
8	Acid resistance (20%, H <sub>2</sub> SO <sub>4</sub> , 24h)	---	No obvious color change, no delamination phenomenon.	Conformed	Pass
9	Alkali resistance (20% NaOH, 24h)	---	No obvious color change, no delamination phenomenon.	Conformed	Pass
10	Freeze/thaw resistance (open freeze/thaw cycle)	mm	≤ 0.3	0.2	Pass
11	Change index	%	≤ 0.1	0.06	Pass

Foshan Supervision Testing Centre of Quality and Metrology  
Test Report  
No. 03-14-0706

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no obvious cracks, pits, rough surface, surface pitting, color difference.	Conformed	Pass
2	Surface layer thickness	mm	≥ 0.17	0.18	Pass
3	Soak strength	N/m <sup>2</sup>	≥ 20	26	Pass
4	Breakage strength	N/m <sup>2</sup>	≥ 20	26	Pass
5	Flexural strength	%	≥ 20	32	Pass
6	Flexural strength deviation	%	≤ 20%	18%	Pass
7	Skewness	mm/m <sup>2</sup>	---	0.08	Pass
8	Water absorption (1h)	%	≤ 0.3	0.2	Pass
9	Water absorption (3h)	%	≤ 0.5	0.2	Pass
10	Water absorption (24h)	%	≤ 0.5	0.2	Pass
11	Acid resistance (20%, H <sub>2</sub> SO <sub>4</sub> , 24h)	---	No obvious color change, no delamination phenomenon.	Conformed	Pass
12	Alkali resistance (20% NaOH, 24h)	---	No obvious color change, no delamination phenomenon.	Conformed	Pass
13	Freeze/thaw resistance (open freeze/thaw cycle)	mm	≤ 0.3	0.2	Pass
14	Change index	%	≤ 0.1	0.06	Pass
15	Change index	%	≤ 0.1	0.06	Pass



**Beide**

APPLICATION FOR CONSTRUCTION PRODUCTS DIRECTIVE

On Behalf of  
**FOSHAN ZHONG XING CHENG PLASTIC FACTORY**  
Plastic Tile  
Model: ASA-1

Prepared For: **FOSHAN ZHONG XING CHENG PLASTIC FACTORY**  
No. 26, Industry Road, Danxin, Foshan, Guangdong, China

Prepared By: **BEIDE (UK) PRODUCT SYSTEMS LIMITED**  
U.K. FLAT 107, 25 INDUSCON SQUARE, LONDON, UNITED KINGDOM  
CHINA: 6F, Bldg E, Houm 3rd Ind Zone, Xixiang, Bao' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 19, 2014  
Date of Report: Mar. 11, 2014  
Report Number: B-6-10229179

**celab**

**CERTIFICATE**

EUROPEAN CONSTRUCTION PRODUCTS CERTIFICATION

CE Marking  
EN 12543-1:2010, EN 12543-2:2010, EN 12543-3:2010, EN 12543-4:2010, EN 12543-5:2010, EN 12543-6:2010, EN 12543-7:2010, EN 12543-8:2010, EN 12543-9:2010, EN 12543-10:2010, EN 12543-11:2010, EN 12543-12:2010, EN 12543-13:2010, EN 12543-14:2010, EN 12543-15:2010, EN 12543-16:2010, EN 12543-17:2010, EN 12543-18:2010, EN 12543-19:2010, EN 12543-20:2010, EN 12543-21:2010, EN 12543-22:2010, EN 12543-23:2010, EN 12543-24:2010, EN 12543-25:2010, EN 12543-26:2010, EN 12543-27:2010, EN 12543-28:2010, EN 12543-29:2010, EN 12543-30:2010, EN 12543-31:2010, EN 12543-32:2010, EN 12543-33:2010, EN 12543-34:2010, EN 12543-35:2010, EN 12543-36:2010, EN 12543-37:2010, EN 12543-38:2010, EN 12543-39:2010, EN 12543-40:2010, EN 12543-41:2010, EN 12543-42:2010, EN 12543-43:2010, EN 12543-44:2010, EN 12543-45:2010, EN 12543-46:2010, EN 12543-47:2010, EN 12543-48:2010, EN 12543-49:2010, EN 12543-50:2010, EN 12543-51:2010, EN 12543-52:2010, EN 12543-53:2010, EN 12543-54:2010, EN 12543-55:2010, EN 12543-56:2010, EN 12543-57:2010, EN 12543-58:2010, EN 12543-59:2010, EN 12543-60:2010, EN 12543-61:2010, EN 12543-62:2010, EN 12543-63:2010, EN 12543-64:2010, EN 12543-65:2010, EN 12543-66:2010, EN 12543-67:2010, EN 12543-68:2010, EN 12543-69:2010, EN 12543-70:2010, EN 12543-71:2010, EN 12543-72:2010, EN 12543-73:2010, EN 12543-74:2010, EN 12543-75:2010, EN 12543-76:2010, EN 12543-77:2010, EN 12543-78:2010, EN 12543-79:2010, EN 12543-80:2010, EN 12543-81:2010, EN 12543-82:2010, EN 12543-83:2010, EN 12543-84:2010, EN 12543-85:2010, EN 12543-86:2010, EN 12543-87:2010, EN 12543-88:2010, EN 12543-89:2010, EN 12543-90:2010, EN 12543-91:2010, EN 12543-92:2010, EN 12543-93:2010, EN 12543-94:2010, EN 12543-95:2010, EN 12543-96:2010, EN 12543-97:2010, EN 12543-98:2010, EN 12543-99:2010, EN 12543-100:2010

www.celab.com

# Exhibition



# Packaging





# FAQ

**\* ¿Es usted fabricante o comerciante?**

\* Sí, somos un fabricante real, hay muchas fotos en la introducción de nuestra empresa. Si necesita otro producto especial, haremos todo lo posible para ayudarlo, para que podamos construir una relación comercial a largo plazo.

**\* ¿Puedo pedir el producto con el que quiero perfilar?**

\* Por supuesto que puede, también produciremos los productos de acuerdo con sus solicitudes de detalle.

**\* ¿Puedes poner la marca de mi compañía en tus productos?**

\* Sí, estamos aceptando el servicio OEM y ODM. Pero necesitamos información sobre su empresa.

**\* ¿Cómo instalar la hoja de techos?**

\* Póngase en contacto con nuestro personal de servicio, tenemos un video de instalación para usted.

**\* ¿Puede proporcionar muestras para abrir el mercado y la calidad de prueba?**

\* Sí, podemos. Podemos proporcionarle muestras gratuitas.

**\* ¿Podrías pagar el costo de envío?**

Por favor, póngase en contacto con nuestro personal de servicio.

**\* ¿Cuál es su término comercial?**

\* Pago: T / T 30% con anticipación, saldo antes del envío.

- Tiempo de entrega de la producción: dentro de los 7 días hábiles después del depósito del 30%
- Puerto de envío FOB: Foshan, Guangzhou, Shenzhen