

Product show



1. Una variedad de materias primas por un cierto porcentaje de mezcla, en la tolva



2. Las materias primas mixtas son pref.-clasificados y calentados para convertirse en baldosas planas.



3. Luego, a través de la presión del molde, aplique lentamente la moldura, el enfriamiento y la máquina de tracción.




4. Para lograr la longitud de las necesidades del cliente. cortar. después de la salida artificial







self-cleaning

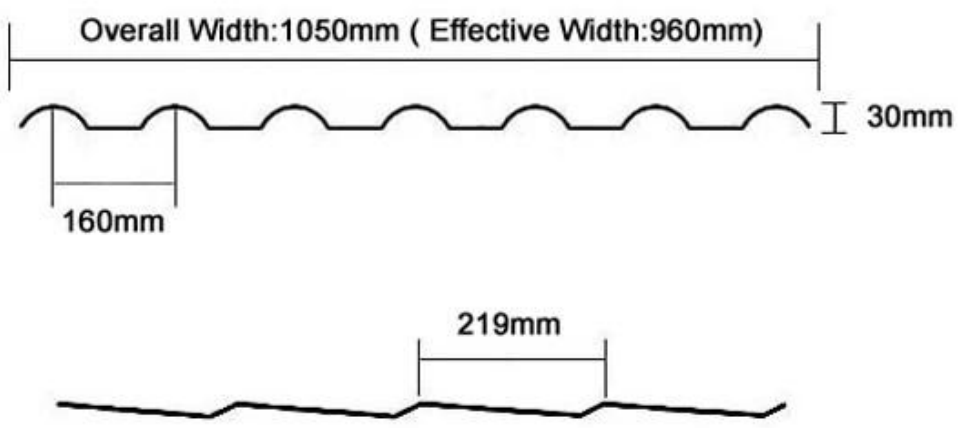

Purplish Red

Brick Red

Sky Blue

Black

Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

Accessories





Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Status
1	Appearance	—	The color of the sheet is uniform. There shall be no bubble, void or visible impurities on the surface. Each of the 10 sheets to be tested shall be marked and shall also be marked.	Confirmed	Pass
2	Width deviation	mm	±10	8	Pass
3	Thickness deviation	mm	±0.2	±0.02	Pass
4	Density	g/m ³	—	1.150	—
5	Tensile strength	MPa	≥28	35	Pass
6	Elongation at break	%	≥10	31	Pass
7	Flaking fall impact	J/kg, 10m	No profuse scale or scale after impact.	Confirmed	Pass
8	Acid resistance	—	No obvious color change or delamination phenomenon.	Confirmed	Pass
9	Alkaline resistance	—	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Flame retardancy	mm	≤10	12	Pass
11	Change value	%	≤10	7.50	Pass

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Status
1	Appearance	—	The surface should be smooth with uniform color and texture. There shall be no bubble, void, visible impurities, or surface pitting, etc.	Confirmed	Pass
2	Surface layer thickness	mm	0.01-0.1	0.08	Pass
3	Tensile strength	MPa	≥20	26	Pass
4	Tensile at break	%	≥20	40	Pass
5	Flexural strength	MPa	≥16	17	Pass
6	Flexural elastic modulus	MPa	≥2200	2620	Pass
7	Density	g/cm ³	1.1-1.2	1.14	Pass
8	Water absorption	%	≤0.5	0.0	Pass
9	Drop hammer impact	J/m ² , 1.5m	No permanent cavity or crack after impact.	Confirmed	Pass
10	Impact	J/m ² , 1.5m	Breaking number: 0	0	Pass
11	Heat after heating	—	No obvious color change, no expansion between the surface layer and the middle layer.	Confirmed	Pass
12	Flame after resistance	—	No cracks or expansion between the surface layer and the middle layer.	Confirmed	Pass
13	Flame retardancy	mm	≤10	10	Pass
14	Uniaxial tensile strength	MPa	≥16	26	Pass
15	Uniaxial elongation at break	%	≥20	40	Pass



Our Factory



Our Customer



Packaging



FAQ

***¿Eres fabricante o comerciante?**

***Sí, somos fabricantes reales, Hay muchas fotos en nuestra introducción de la compañía. Si necesita otro producto especial, haremos todo lo posible para ayudarlo, para que podamos construir una relación comercial a largo plazo.**

***¿Puedo pedir el producto con el que quiero hacer un perfil?**

***Por supuesto que puede, también produciremos los productos de acuerdo con sus solicitudes de detalles.**

***¿Puedes poner la marca de mi empresa en tus productos?**

***Sí, aceptamos el servicio OEM & ODM. Pero necesitamos información sobre su empresa.**

***¿Cómo instalar la lámina de techo?**

***Por favor contacte a nuestro personal de servicio, tenemos un video de instalación para usted..**

***¿Pueden proporcionarme muestras para abrir el mercado y probar? ¿calidad?**

***Sí, podemos. Podemos proporcionarle muestras gratuitas, ¿podría pagar el costo de envío? Póngase en contacto con nuestro personal de servicio.**

***¿Cuál es su término comercial?**


*** Pago: T / T 30% por adelantado, balance antes del envío.**

• Plazo de ejecución de producción: dentro de 7 días hábiles después del depósito del 30%

• FOB puerto de envío: Foshan, Guangzhou, Shenzhen

Contact us

 Tel:+86-13702632466


 Fax:0086-757-81848277

 Skype:jimhuang0.0

 Whatsapp:+86 137 0263 2466

 E-mails:sales08rooftile@zxc9999.com



 Add:Xiebian industrial Area,Danzao Town,Nanhai District,
Foshan City,Guangdong Province