

造行业品牌 筑美丽家园



佛山市众兴晟新材料科技有限公司

Foshan ZXC New Material Technology Co., Ltd


厂址：广东省佛山市南海区丹灶镇建设村工业园

Xiaohai Industrial Area, Dansao Town, Nanhai District, Foshan City, Guangdong Province

电话/Tel: +86757-81848277 81848023 传真/Fax: +86757-81848022

官方网站: <http://www.fsxzcwa.com> 国内站: <http://zxc9999.1688.com> 国际站: <http://zxcrooftile.en.alibaba.com>

CCTV 2017年度央视展播品牌

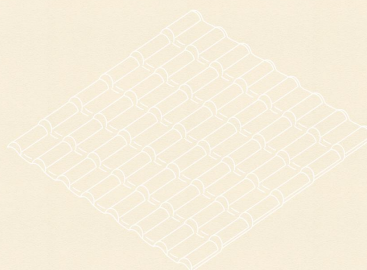

通过 ISO9001:2008 质量管理体系认证

PICC 本公司产品由中国人民保险公司质量承保

The New 全新版

推进行业进步
造行业品牌



愿景

VISION
推进行业进步

成就屋面防腐瓦行业品牌

Achieved anti-corrosion roof sheet industry brand



公司简介 Our Company

位于经济及工业发达的佛山市南海区，是一家专业生产ASA合成树脂瓦，APVC防腐复合瓦，PVC防腐瓦，PVC水槽，PVC平板，FRP透明瓦，PVC、PC透明瓦的专业生产厂家。

佛山市众兴瓦业新材料科技有限公司引进了国内外先进的生产设备和工艺技术，以科学严谨、绿色低碳的生产理念和人性化的管理模式为核心，以“立体化服务”为导向的经营理念，在多年的苦心经营和不断探索下，逐步成长为佛山一流的大型瓦类生产企业。公司总占地面积15000平方米，拥有自己实验室和研发中心，严格按照ISO9001:2008质量管理体系的标准设计厂房及生产布局，不断以技术创新和持续生产工艺实现清洁、环保、节能生产。在产品品质把控的方面，公司始终坚持以远高于国家标准的企业内控标准组织生产，同时建立了一套质量管理体系，把质量管控细化到生产的每一道工序，产品的品质得到了行业一流水平，深受广大用户的好评。

造行业品牌，筑美丽家园。众兴瓦业正以专业高端、专注服务的精神在做好每一个环节，为消费者构筑美丽家园而努力。

Foshan ZXC New Material Technology Co., Ltd is a professional manufacture for ASA Synthetic Resin Roof Tile, PVC Anti-corrosion Roofing Sheet, APVC Plastic Roofing Sheet, UPVC heat insulation Roofing Sheet, Fiberglass Transparent Roof Sheet, PC clear roofing sheet, PVC Rain Gutter and Accessories.

We are locat in Xiebian industrial area, Danzao Town, Nanhai District, Foshan City, Guangdong Province, China. We have 8 produce line, about 100 employee. Plant covers an area of 15,000 square meters.

We are adopt advanced production equipment and technology, we talk the rigorous science, green low-carbon production philosophy and humane management as the core. after years of painstaking efforts and continuous exploration, and gradually grow into a first-class large-scale roof tile manufacturer in Foshan.

The company has good software and hardware facilities and it has passed ISO9001:2008 International Quality System Certification. Besides, with the assured stability in product quality, it has passed CE certification. Create industry brand, build a beautiful home. Good quality. Good service. Good price. It's our sales philosophy.



01

发展历程 Company history



02

公司资质 Product Introduce



03

各项质检报告 Product Introduce



04

我们的团队 Our team

公司秉承“以人为本，我们想家人”的原则，给员工营造一个舒适、自然的工作环境，我们制定出一套相对人性化的管理模式，尊重员工，并鼓励员工创新，参与企业管理，使员工认识个人前途与企业发展的紧密相连，全面提升员工的综合能力水平。

"people-oriented, we are family" is our company's principle. Create a comfortable and natural working environment for employees. we have developed a relatively humane management model, respect for employees, and encourage employees to innovate, participate in company management, so that employees know personal future and company development are closely linked, and comprehensively enhance the level of comprehensive ability of employees.



05

我们的客户 Our customer

公司拥有强大的营销网络系统，经销商遍及各省、市、县。为了公司未来长远的发展，我们正努力开拓海外市场，与超过50多个国家和地区建立了良好的贸易伙伴关系；

我们相信，通过我们的不断努力和追求，一定能实现“互利共赢，感谢客户”的合作理念。

Our company has a strong marketing network system, distributors throughout the many city in China. Think of the company's long-term future development, we are trying to open up foreign markets, with more than 50 countries and regions have established good trade partnership;

We believe that through our continuous efforts and pursuit, we will surely achieve the cooperation concept of "mutual benefit and win-win, grateful customer"



06

ASA合成树脂瓦 ASA synthetic resin tile

提供25年质保
Provide 25 years warranty



超耐候性工程树脂ASA作为瓦的表面材料，加上高强度的耐磨层制作而成。颜色持久，一经雨水冲刷便洁净如新。防水、密封、保温隔热、耐腐蚀、抗风防震、抗冰雹、绿色环保。适用于别墅和高档厂房。

Ultra high weatherability engineering resin ASA as surface material tile with high strength, wear-resisting layer is produced, lasting color, waterproof, tenacity, heat insulation, corrosion resistance, anti shock, anti hail, green environmental protection, Sound insulation, anti aging.



产品规格、参数

厚度 3.0mm、2.5mm 宽度 1050mm
长度 按节距的倍数订造 颜色 天蓝色 Blue 黛蓝色 Grey



07



众兴晟ASA树脂瓦采用世界500强企业SABIC公司 GELLOY 耐摔 高耐候工程树脂ASA原材料，保证色彩鲜艳、持久不褪色。

而市面上较多厂家采用了国产ASA、亚克力甚至ABS作为面料，色彩不够鲜艳、耐候性能差、褪色快。



众兴晟树脂瓦产品上全部印有ASA材料，及由中国人民保险公司质量承保的标识，保用25年。



众兴晟树脂瓦防水槽也采用了世界500强企业SABIC公司 GELLOY 耐摔 高耐候工程树脂ASA原材料，保证色彩鲜艳、持久不褪色。



众兴晟树脂瓦专用螺丝，有自扩孔功能，自扩孔径达10mm，瓦在热胀冷缩时有充分的活动空间，也不会产生瓦面的“吱吱”异响现象。保证屋面瓦更加牢固耐用。






众兴晟树脂瓦韧性好，经货车碾压后表面无爆裂现象，具有良好的承载能力。



众兴晟树脂瓦韧性好，承载能力极强，二个成人站在中间瓦不塌。

08

ASA合成树脂瓦专用配件

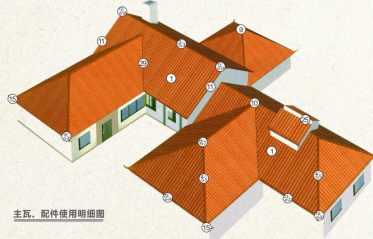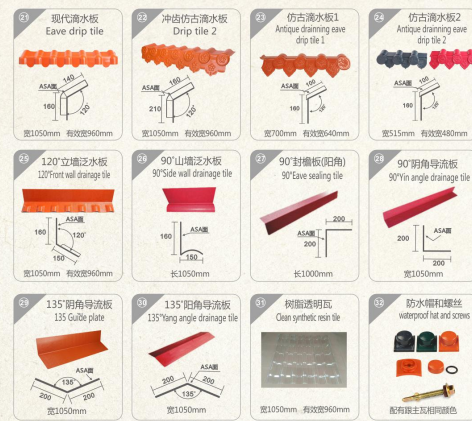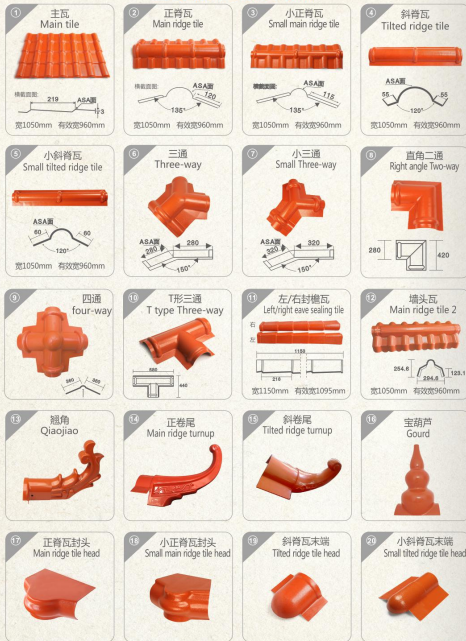

主瓦、配件使用明细图

ASA树脂小青瓦 ASA synthetic resin tile




传统瓦房建筑有上千年的历史，但是由于古代科学技术的局限性，传统瓦房的设计并没有考虑周全，在防水和维修方面存在较大的缺陷。我公司自主研发出ASA树脂小青瓦，采用三层共挤（A/B/C）技术一次加工而成；其中表层为ASA层，中间层为骨架层，底层为耐磨层。独特的工艺制作，更高的强度，不易损坏，维修方便。ASA树脂小青瓦采用传统瓦房建筑古体的造型，突出立体感的视觉效应。ASA树脂小青瓦是农村土坯房、祖屋青瓦的替代品，也用于古城复建、别墅、移动房屋、农家乐等古香古色景观设施。

The traditional roof tile has a history of about a thousand years. Due to the limitation of ancient science and technology, however, the design of the traditional roof tile has not been well thought out and there are major shortcomings in waterproofing and repairing.

Our company independently developed ASA Synthetic Resin Roof Tile (Chinese traditional style), using three co-extruded (A / B / C) technology once processed; the surface is ASA layer, the middle layer is the skeleton layer, the bottom of the wear layer.

Unique production process, higher strength, not easy to damage, easy maintenance. ASA Synthetic Resin Roof Tile (Chinese traditional style) used for the ancient city roofs, villas, mobile homes, garden pavilions, farmhouse and other antique quaint roofing areas.



产品规格、参数

厚度 3.0mm、2.5mm 宽度 1050mm
长度 按节距的倍数订造 颜色 蓝色 灰色 红色 绿色 黑色



小青瓦配件图



新农村改造应用



农家乐应用



13

旅游景区应用



别墅应用



14



特性一：色彩持久

众兴复合树脂瓦表面材料是选用进口的优质树脂材料，经特殊工艺处理，在自然环境中具有超长的持久性，它即能长期暴露于紫外线、湿气、热、雨等的环境下，仍能保持其色彩的稳定性。

1. Lasting color

The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness it still keeps stable color.



特性四：优异的耐腐蚀性

众兴树脂瓦可以长期抵御酸、碱、盐等腐蚀性物质的侵蚀。实验证明：在盐、碱及60%以下各种酸中浸泡24小时无化学变化，非常适用于酸雨多发地区和沿海地区使用，效果特别显著。

4. Excellent corrosion-resisting performance

Synthetic resin tile can resist long-term acid, alkali and salt corrosion. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.



特性二：卓越的抗负载

众兴复合树脂瓦具有极好的承载能力。在温度变化的地区，即使遭受强风和暴雨，合成树脂瓦不会产生表面破裂及断裂现象。经测试，在支撑距离660mm的情况下，加载150kg，瓦不会产生断裂现象。

2. Excellent anti-load performance

Excellent bearing capacity. In low-temperature areas even if the roof has perennial snow cover the synthetic resin tile will not have surface damage or rupture. As tested no tile cracking or damage will occur under the conditions of 660mm supporting space and loading 150kg.



特性五：抗冲击 耐低温性能好

众兴复合树脂瓦具有较强外承受能力。经实验1公斤钢球从3mm高自由落下不会产生裂纹，低温下冲击性能也十分显著。

5. Good impact resistance and low temperature resistance

Comparatively high impact resistance. As tested, it will not crack with big steel ball falling on it freely from the height of 3M. The impact resistance is also outstanding under low temperature.



特性三：隔音效果好

经实验证明，在遭受暴雨、大风等外界噪音影响时，众兴树脂瓦具有极好的吸收噪音功能。

3. Good sound insulation

Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.



特性六：自洁性能优异

众兴复合树脂瓦表面致密光滑，具有“荷叶效应”，本身不吸附灰尘，一般雨水冲刷即可清洁干净，瓦面不会出现雨水冲刷后不会出现的斑驳现象。

6. Excellent self-cleaning performance

The surface is dense and smooth with "lotus leaf effect", not easy to absorb dust and will be cleaned by rain. The tile surface stains will not leave stains after rain washing and not easy to hang snow reducing risk of collapse caused by over load.

15



特性七：保温隔热性能优异

众兴复合树脂瓦的导热系数为0.325W/m.k，大约为粘土瓦的1/310，水泥瓦的1/5，0.5mm厚彩钢瓦的1/200，因此，在不考虑加保温层的情况下，众兴复合树脂瓦的隔热保温性能均能达到最佳。

7. Excellent heat-preserving and heat insulating property

The heat conductivity coefficient is 0.325w/m.k, about 1/310 of clay tile, 1/5 of cement tile, and 1/200 of thick color steel tile. Therefore without considering adding heat-preserving layer the heat insulation and heat preservation of synthetic resin tile can still be optimized.



特性八：防火性强

众兴复合树脂瓦是难燃材料，达到A级防火性能。

8. Good fire resistance

Belonging flame retardant material, with fire resistance B1 as tested by national authoritative departments according to GB8624-2006 standard



特性九：卓越的防水性能

众兴复合树脂瓦所采用的树脂材料本身致密且不吸水，不存在吸水的问题。产品重量比传统瓦轻45%，屋面荷载少，因此众兴树脂瓦的防水性能大大提升。

9. Excellent waterproofing performance

The synthetic resin tile selects highly weather-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% lighter than traditional tiles with less roof contact, so synthetic resin tile's waterproof performance has greatly increased than traditional tiles.



特性十：优异的绝缘性能

众兴复合树脂瓦是绝缘产品，遇到雷电放电也会完好无损。

10. Excellent insulating property

Insulating product, keeping intact accidental electric discharge.



特性十一：绿色环保

众兴复合树脂瓦不含石棉及放射性元素，并可回收利用，完全符合绿色环保要求。

11. Green environment-friendly

Containing no asbestos and radioactive elements, recyclable and fully meeting green environmental protection requirements



特性十二：安装快捷


众兴复合树脂瓦有效宽度可达960mm，铺装效率高；重量轻，安装简单，无辐射污染。

12. Quick installation

Light weight and with complete accessory varieties, so very easy to load and unload besides, with effective width of 960mm. Our synthetic resin tile is more efficient and cost-saving in installation

16

合成树脂瓦安装图

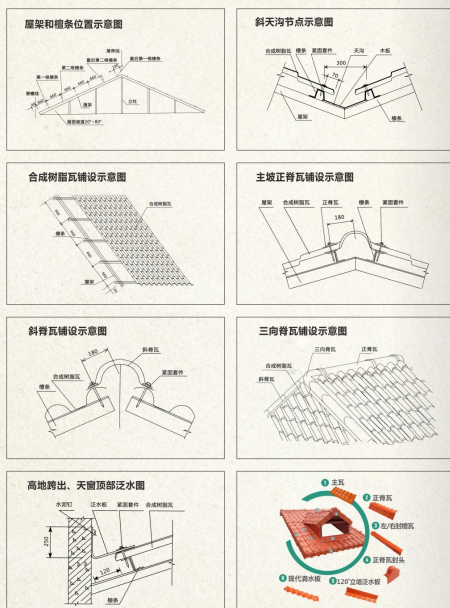

17


ASA/PVC超耐候复合瓦 ASA/PVC weather resistance composite tile

提供25年质保
Provide 25 years warranty

- 色彩持久
Lasting color
- 绿色环保
Green and environment friendly
- 优异的耐腐蚀性能
Excellent corrosion resistance
- 优异的耐候性能
Excellent weather fastness
- 优异的隔热、隔音、防火性能
Excellent sound insulation resistance to heat transfer, fire retardation



该产品为双色三层或三色三层超耐候防腐复合瓦，面层材料为ASA超耐候工程树脂，中间为韧性特好的聚氯乙烯树脂（简称PVC），底层材料为白色韧性耐磨材料，以增大厂房的空间感和光亮度及耐磨性。

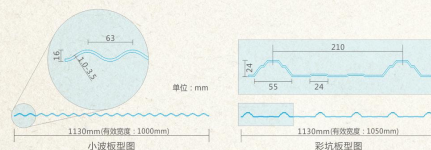

产品规格、参数

厚度	1.5mm-3.0mm	宽度	930mm/1130mm
长度	长度可按客户要求订造	颜色	白、灰、红、黄、蓝、绿、棕

18

APVC防腐复合瓦 APVC anti-corrosion composite roof sheet


提供15年质保
Provide 15 years warranty

- 超强抗老化
Excellent ageing resistance
- 优异的耐腐蚀性能
Excellent corrosion resistance
- 优异的耐候性能
Excellent weather fastness
- 优异的隔热、隔音、防火性能
Excellent sound insulation resistance to heat transfer, fire retardation



该产品采用二层或三层共挤技术一次加工完成。表面材料为耐候树脂，辅以UV抗紫外线剂和优质助剂，确保产品的耐久性和耐化学腐蚀性。中间材料为韧性特好的透光改性PVC材质，保证厚度同时增加韧性。底层材料为白色韧性耐磨材料，以增加厂房的空间感和光亮度。

The product adopts two layer or three layer coextrusion technology behind a complete processing. The surface material is weather resistant resin, ensure product durability and resistance to chemical corrosion. Intermediate material for toughness shading good modified PVC material, ensure the thickness while increasing steel. Bottom material is white toughness and wear resistance materials, to increase the sense of space and light plant.

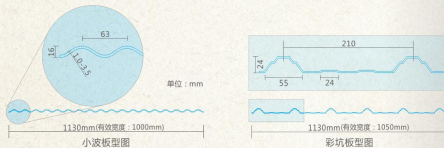


产品规格、参数

厚度	1.5mm-3.0mm	宽度	930mm/1130mm
长度	长度可按客户要求订造	颜色	白、灰、红、黄、蓝、绿、棕

19

ASA / PVC 墙面板 APVC anticorrosive composite wave tile

提供15年质保
Provide 15 years warranty



众兴ASA/PVC墙面板是一种新型的装饰材料，可用于厂房墙面、室内吊顶及其他装饰。

材料内部质地致密，100%防腐、防蛀。不仅兼具了防水防潮的特点，而且产品本身质地轻质，易于安装。兼具“韧性”和“刚性”，耐酸碱腐蚀、抗氧化、吸音、隔热等多种性能，受到广大用户的一致好评，是装饰建筑、隔断工程、园林景观、防水防腐工程等行业的理想建筑材料。

ASA / PVC wall panel is a new type of decorative materials, can be used for plant walls, interior ceiling and other decorations. Material texture of the internal dense, 100% mildew, moth, not only combines the characteristics of waterproof moisture, but the product itself texture light, easy to install. It has many properties such as "toughness" and "rigidity", acid and alkali resistance, oxidation resistance, sound absorption and heat insulation. It is praised by customers. It is very good new building materials for decorative building, partition engineering, landscape architecture, waterproof and anti-corrosion engineering.

UPVC防腐耐候瓦 UPVC anticorrosive composite wave tile

提供10年质保
Provide 10 years warranty

- 特性：防火、耐酸、耐碱、抗老化
Properties: fire retardation, Corrosion resistance, Alkali-resistance, Ageing resistance




主要原料为普通聚氯乙烯树脂PVC，优质助剂经科学配比，用先进的工艺技术制成。
The main raw material is PVC resin with ultraviolet resistant agent and additives. Through scientific compounding, made with advanced technology.

20

980型防腐耐候瓦 (耐压加强型) 980 CORROSION RESISTANCE (STRENGTHEN)

提供15年质保
Provide 15 years warranty

- 超强抗老化
Excellent aging resistance
- 优异的耐候、耐腐蚀性能
Excellent corrosion resistance
- 防漏水
Water proof
- 高强度
Resistance to impact



目前市场上塑料瓦的传统波形为小波和大波，小波的波高为16mm，大波的波高为24mm，存在排水慢、易漏水的缺陷。980型波浪瓦就是为了解决这个漏水难题专门设计的，二边波高为36mm，中间为34mm，排水沟设计更大。实践证明效果非常好。另一方面，这种设计强度和耐压性能特别好，在会下雨的地区，暴雨情况下尤其适用。还能与1050型的几种波形铁瓦匹配，直接加层。

At present, the traditional market corrugated plastic sheet for the wavelet and wavelet 1130 pit, height of 16MM, pit wave height is 24MM, drainage is slow, easy to Water Leakage defects. 980 wave tile is in order to solve this problem Water Leakage specially designed, two sides of the wave height is 36MM for the design of a 34MM drain more. Practice proves that the effect is obvious, on the other hand, the design strength and compressive performance is particularly good, especially in snow storm case, also can match with several kinds of corrugated iron type 1050 wavy, add layer directly.



900型高波防腐耐候瓦

#900 high type anti-corrosion weathering roof sheet

提供15年质保
Provide 15 years warranty



900型高波防腐耐候瓦波高达到45mm,对生产技术要求有很大的要求，目前市面上只有我们公司生产规格，在同行中处于领先。波型的增加，大大加大了其承载力，同时檩条的距离也可以达到1.4米，达到减少成本的目的。该产品波形高，排水极快，彻底解决了漏水难题，尤其暴雨情况下优势更加突出。

900 type anti-corrosion weather resistant roof sheet wave up to 45mm,The production technology has great requirements, the current market only our company production and sales, leading in the peer.Increase the wave height, increase its carrying capacity, the distance of purlins also can be 1.4 meter, to achieve the purpose of reducing costs.The product of high wave,fast drainage, solve the leak water problem, especially in rainy conditions more prominent advantages.




21


FRP玻璃钢透明瓦

Glass fiber reinforced plastic transparent tile


提供10年质保
Provide 10 years warranty



主要原料为不饱和树脂，中间加入优质的玻璃纤维，表面贴膜防紫外线薄膜加工而成。
The main raw material is unsaturated resin, with high quality glass fiber, surface mount anti ultraviolet film and processing.



PC 透明瓦
PC transparent tile




PVC 半透明瓦
PVC Translucent flat sheet

22

PVC平板、PVC透明平板 PVC flat sheet, PVC transparent tile

主要原料为聚氯乙烯树脂PVC，优质助剂，经科学配比，用先进的技术制成。


The main raw material is PVC resin with ultraviolet resistant agent and additives. Through scientific compounding, made with advanced technology.

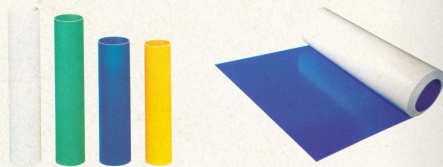

弯形彩瓦 Curved color tile



PVC脊瓦 PVC ridge tile



23

PVC水槽及配件 PVC gutter and accessories

PVC水槽代替铁皮水槽，防腐耐碱
美观耐用，且施工容易，省时省力





下水口

平接

封口

下水封

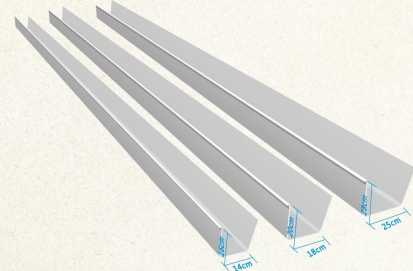

蓝色水槽具有极强的韧性
解决普通水槽使用寿命短、运输、施工易损坏的难题

24