

# Product show



1. Una varietà di materie prime da a certa percentuale di miscelazione, nella tramoggia



2. Le materie prime miste sono pref -formate e riscaldate per diventare piastrelle piane





3. Quindi attraverso la pressione dello stampo, lastica lo stampaggio, il raffreddamento, attraverso la macchina di trazione introdotta lentamente



4. Per raggiungere la lunghezza delle esigenze del cliente tagliare. dopo l'uscita artificiale



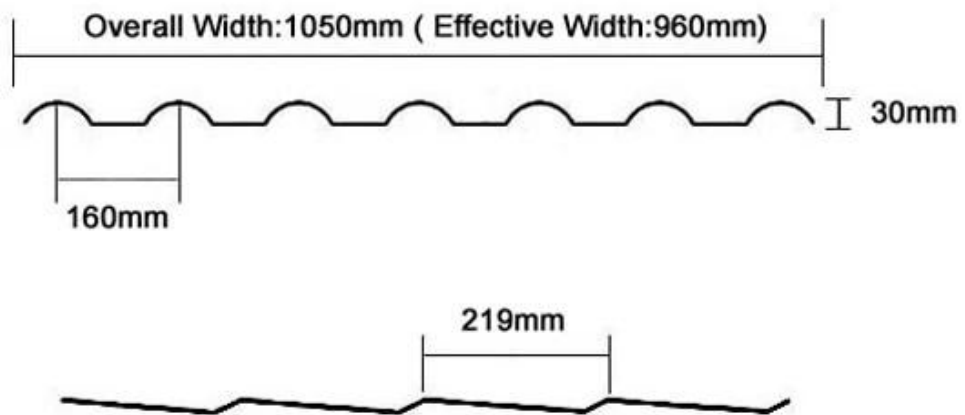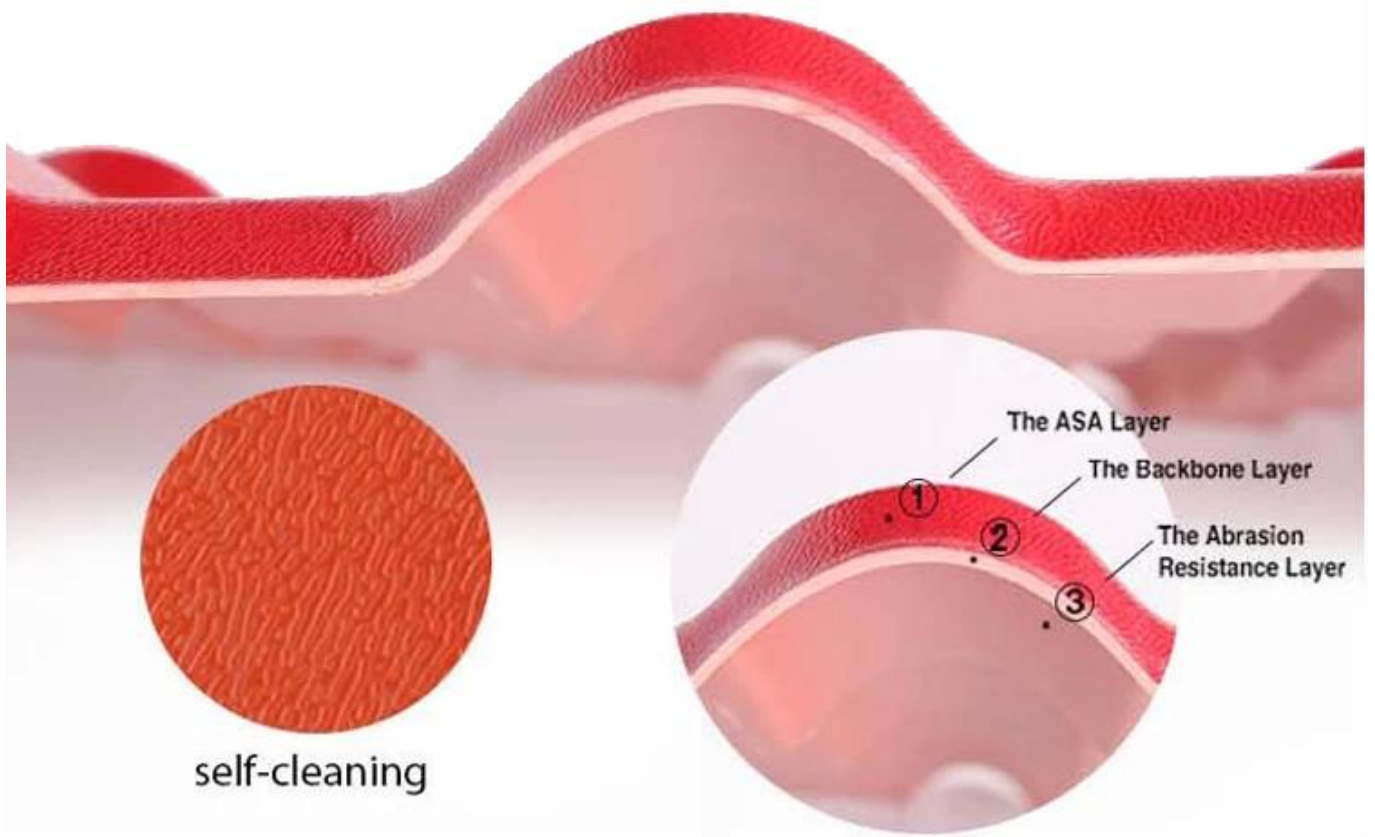

Purplish Red



Brick Red



Sky Blue














Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

# Accessories





# Certificate



Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The color of the sheet is uniform. There should be no defects such as visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Wall thickness	mm	0.2	0.2	Pass
3	Thickness deviation	mm	±0.02	±0.02	Pass
4	Density	g/cm <sup>3</sup>	---	1.170	---
5	Tensile strength	MPa	≥1.0	1.1	Pass
6	Elongation at break	%	≥2.0	3.1	Pass
7	Holding full impact	kJ/m <sup>2</sup>	---	---	Confirmed
8	Char temperature	°C	---	---	Confirmed
9	Flammability (UL94)	---	---	---	Confirmed
10	Flammability (UL94)	---	---	---	Confirmed
11	Flammability (UL94)	---	---	---	Confirmed
12	Flammability (UL94)	---	---	---	Confirmed
13	Flammability (UL94)	---	---	---	Confirmed
14	Flammability (UL94)	---	---	---	Confirmed
15	Flammability (UL94)	---	---	---	Confirmed
16	Flammability (UL94)	---	---	---	Confirmed
17	Flammability (UL94)	---	---	---	Confirmed
18	Flammability (UL94)	---	---	---	Confirmed
19	Flammability (UL94)	---	---	---	Confirmed
20	Flammability (UL94)	---	---	---	Confirmed

Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The surface should be smooth and uniform. There should be no visible defects such as visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Surface roughness	mm	0.1	0.1	Pass
3	Tensile strength	MPa	≥1.0	1.1	Pass
4	Elongation at break	%	≥2.0	3.1	Pass
5	Flexural strength	MPa	≥1.0	1.1	Pass
6	Flexural modulus	MPa	≥1.0	1.1	Pass
7	Density	g/cm <sup>3</sup>	---	1.170	---
8	Heat stability	°C	---	---	---
9	Heat stability	°C	---	---	---
10	Heat stability	°C	---	---	---
11	Heat stability	°C	---	---	---
12	Heat stability	°C	---	---	---
13	Heat stability	°C	---	---	---
14	Heat stability	°C	---	---	---
15	Heat stability	°C	---	---	---
16	Heat stability	°C	---	---	---
17	Heat stability	°C	---	---	---
18	Heat stability	°C	---	---	---
19	Heat stability	°C	---	---	---
20	Heat stability	°C	---	---	---



# Our Factory







# Our Customer



# Packaging



## FAQ

**\* Sei produttore o commerciante?**

**\* Sì, siamo un vero produttore, ci sono molte immagini nella nostra introduzione dell'azienda. se hai bisogno di un altro prodotto speciale, faremo del nostro meglio per aiutarti, in modo da poter costruire una relazione commerciale a lungo termine.**

**\* Posso ordinare il prodotto con voglio profilare?**

**\* Certo che puoi, inoltre produrremo i prodotti in base alle tue richieste di dettaglio.**

**\* Puoi mettere il marchio della mia azienda sui tuoi prodotti?**

**\* Sì, accettiamo il servizio OEM e ODM. Ma abbiamo bisogno di alcune informazioni sulla tua azienda.**

**\* Come installare il foglio di copertura?**

**\* Si prega di contattare il nostro personale di servizio, abbiamo un video di installazione per voi.**

**\* Potete fornire campioni per me per aprire il mercato e testare qualità?**

**\* Sì, possiamo. Possiamo fornirti campioni gratuiti, potresti pagare il costo di spedizione? Si prega di contattare il nostro personale di servizio.**

**\* Qual è il tuo termine commerciale?**

**\* Pagamento: T/T 30% in anticipo, saldo prima della spedizione.**

**• Lead Time di produzione: Entro 7 giorni lavorativi dopo il deposito del 30%.**

**• Porto di spedizione FOB: Foshan, Guangzhou, Shenzhen**