

Product show

በጥንቃቄ **ZXC FRP** በመጠቀም ለራስዎ የጥንቃቄ ምልክት ይፈጥሩ:

[illegible]

□□□□ □□ □□□□:

[illegible]

frp 服务端 启动命令:

[illegible][illegible]

00000000 00000000 ,00000000 0000 00000000:

[illegible][illegible]



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***



פרטים כלליים	פרטים טכניים
מיקוד	frp-01
סוג	סליל
סליל	11800 מ"מ, 6000 מ"מ
סליל	סליל, סליל, סליל
סליל	930 מ"מ
סליל	840 מ"מ
סליל	660 מ"מ
סליל	1.0±0.1 מ"מ
	1.2±0.1 מ"מ
	1.5±0.1 מ"מ
	2.0±0.1 מ"מ
סליל	1.7±0.1 מ"מ/ס"מ
	2.1±0.1 מ"מ/ס"מ
	2.6±0.1 מ"מ/ס"מ
	3.0±0.1 מ"מ/ס"מ
פרטים כלליים	
SQ.M./20 FCL (21 סליל)	SQ.M./40 FCL (26 סליל)
12000 מ"מ	15000 מ"מ
10000 מ"מ	12300 מ"מ
8000 מ"מ	10000 מ"מ
7000 מ"מ	8600 מ"מ

אנו [יצרן פלסטיק גלי שקוף](#), לספק שירותים מותאמים אישית במחיר נמוך, אם יש לך צרכי רעפים כלשהם, אל תהסס לפנות אלינו למכירות או להשאיר לנו הודעה!

CUSTOMER CASE SHOW

Has more than ten years of production experience



厚度:	1.0 mm 2.8 mm
厚度:	1130/ 930/ 900/ 840 mm
厚度:	厚度 厚度 厚度
厚度:	厚度 厚度 ,厚度 厚度
厚度 厚度:	厚度
厚度 厚度:	厚度 厚度 厚度 ,厚度 厚度 ,厚度 ,厚度 ,厚度 厚度 ,厚度 厚度 厚度 ,厚度 ,厚度 厚度'.

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue




grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

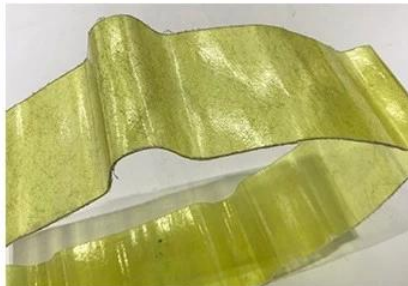

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS “ TO CHOOSE US

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*

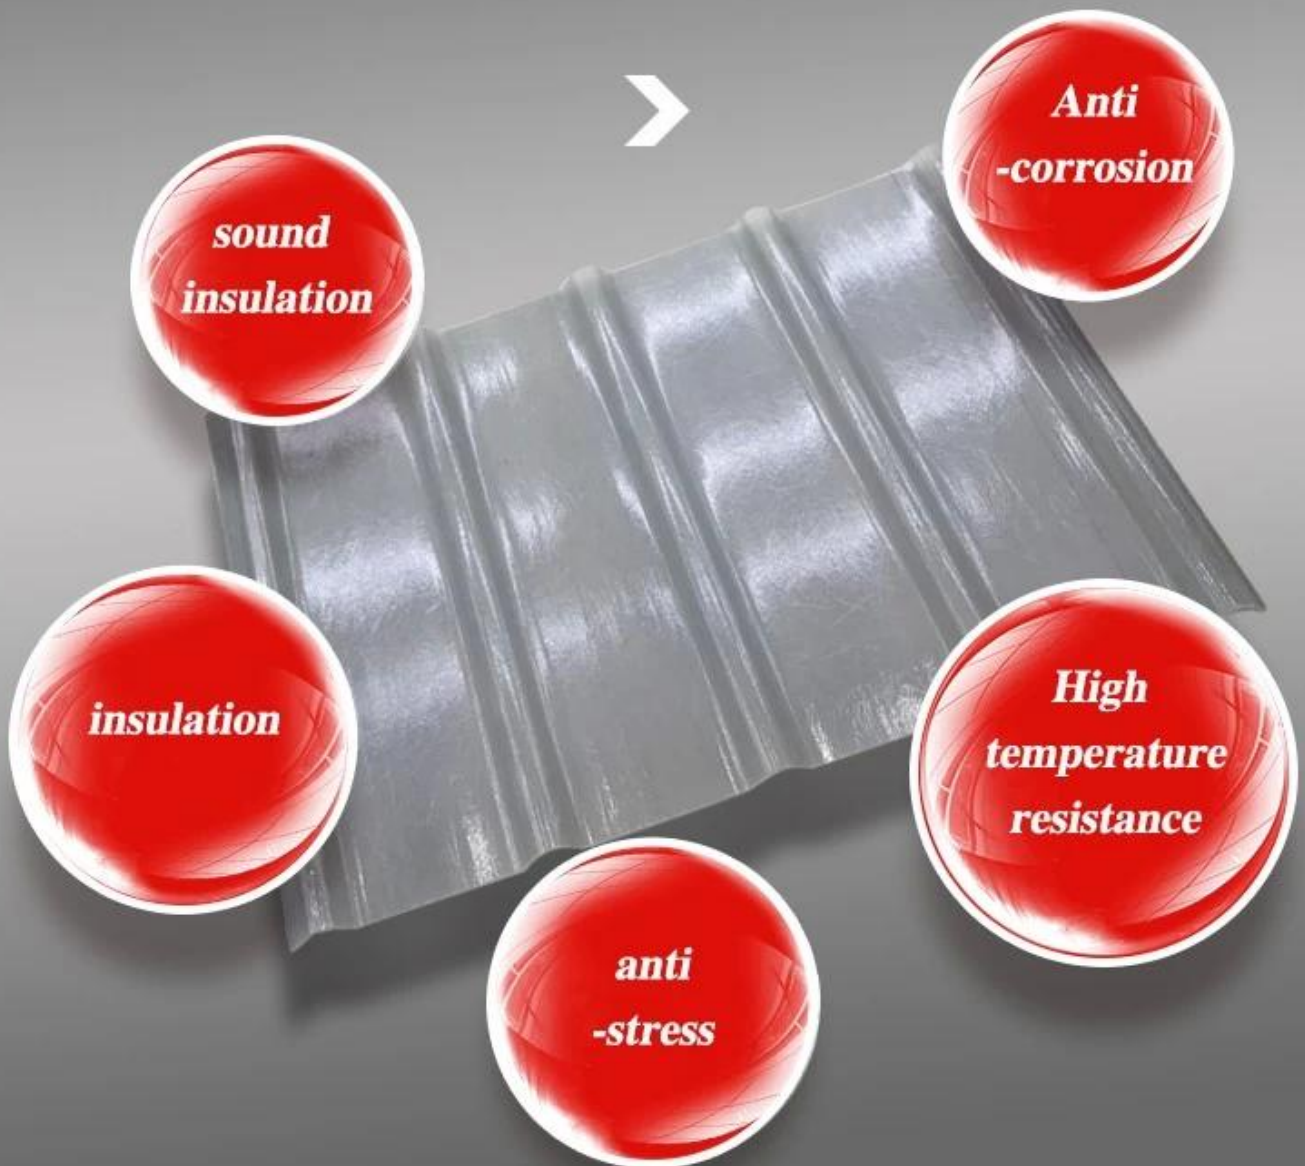

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening




The light is astigmatism, the light is soft, and the light transmittance is high.

Zhongxingcheng New Material Co., Ltd 中興成新材料股份有限公司，係由黃國城先生、黃國雄先生、黃國華先生三人共同創立。本公司主要經營各類塑膠原料，包括：ASA、APVC、PVC、FRP 等。



FACTORY REAL SHOT DISPLAY

Professional production to do every step

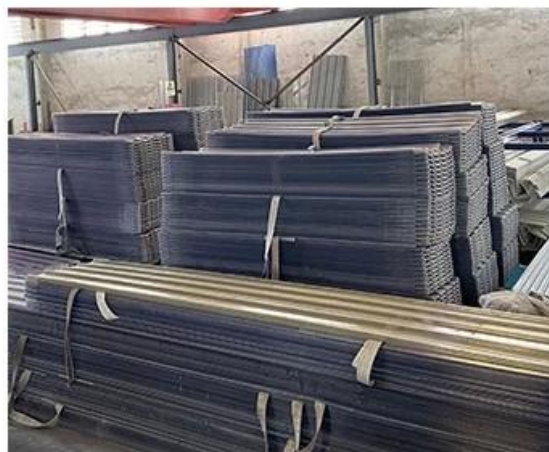

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



— 01 —

ONLINE CONSULTATION

Provide professional product
consultation



— 02 —

PROVIDE PRICING

Provide reasonable price for
product performance



— 03 —

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

ORDER PRODUCTION

Professional and rapid production
of multiple production lines

— **05** —

AFTER DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

*? 0000 00 0000 000 000
00000 0000 00000 ,000 00000 0000 0000 000 00 .0000 00000 00000 00000 0000 00 ,00000 0000 00000 ,00*
.0000 00000 00000 00000 00000 00000 00000 0000 000 ,00 00000 000 00000000

?□□□□□ □□□□□ □□□□ □□ □□ □□□□□ □□ □□□□□ □□□□ □□ □□□*

.ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ,ᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ*

?ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃ*

ᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ,ᐃᐃ * OEM & ODM. .ᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ

?ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃ*

.ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃ ,ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃ*

?ᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ*

ᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃ ?ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ ᐃᐃᐃ ,ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ .ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ,ᐃᐃ*

.ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃ

?ᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃ*

ᐃᐃᐃᐃᐃ *: T/T 30% .ᐃᐃᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃ ,ᐃᐃᐃᐃ

.30% ᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ 7 ᐃᐃᐃᐃ :ᐃᐃᐃᐃᐃ ᐃᐃᐃᐃᐃ ᐃᐃᐃ •

ᐃᐃᐃᐃᐃ ᐃᐃᐃ • FOB: ᐃᐃᐃᐃ ,ᐃᐃᐃ'ᐃᐃᐃᐃᐃᐃᐃ ,ᐃᐃᐃᐃᐃ