

Product show

□□□□ □□□□ :□□□□
□□□□ □□ □□□□ 10 :□□□□ □□
□□□□ □□□□ :□□□□
,□"□ 2.2 ,□"□ 2.0 ,□"□ 1.8 :□□□□
□"□ 3.0 ,□"□ 2.8 ,□"□ 2.5
□"□ 1130 :□□□□ □□□□
□"□ 1000/1050 :□□□□ □□□□
□"□ 660 :□□□□□□ □□□□□□
□□□□□□ 3 :□□□□□□
□□□□/□□□□ □□□□ :□□□□



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

More Types


1130 corrugaetd sheets




1130 trapezoidal sheets




900 high wave

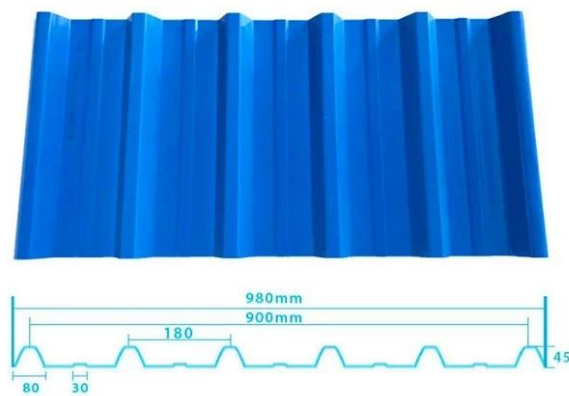

980 high wave

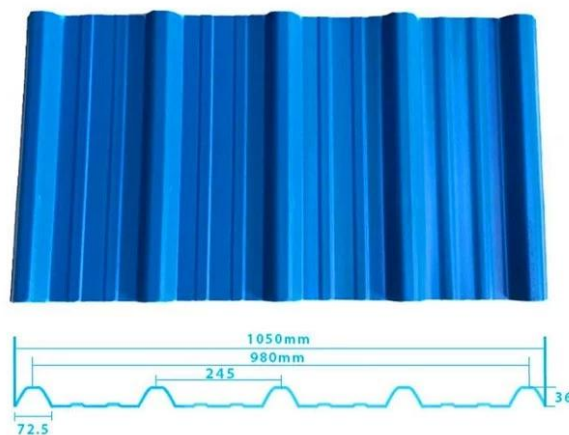

PVC accessories


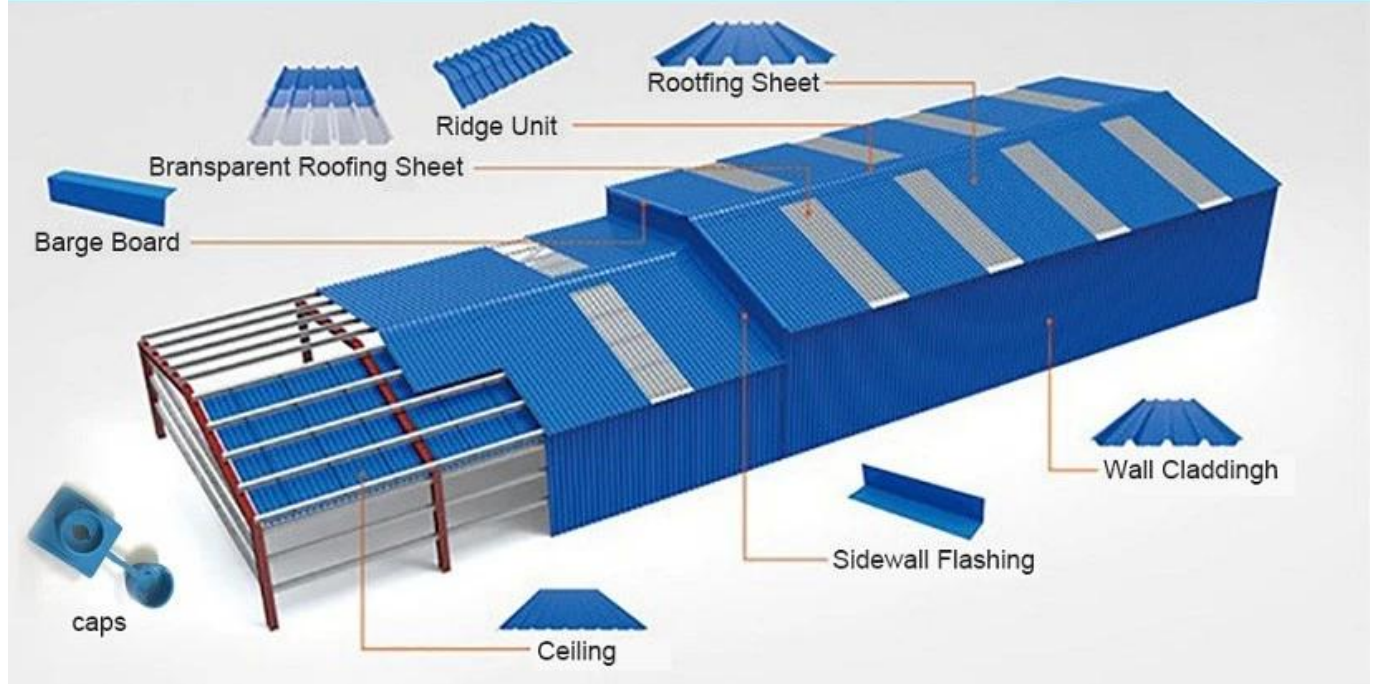


ZXC New Material Technology Co., 專業生產 各種規格 各種 各種規格 . "PVC, 各種 各種規格 ASA, 各種 各種規格 FRP, 各種規格 各種規格 , 各種 upvc 各種 各種規格 各種 各種規格 各種 . " 各種規格 各種規格 各種規格 , 各種規格 各種規格 各種規格 各種規格 各種規格 各種規格 . 各種規格 各種規格 .

Our Factory



Engineering case

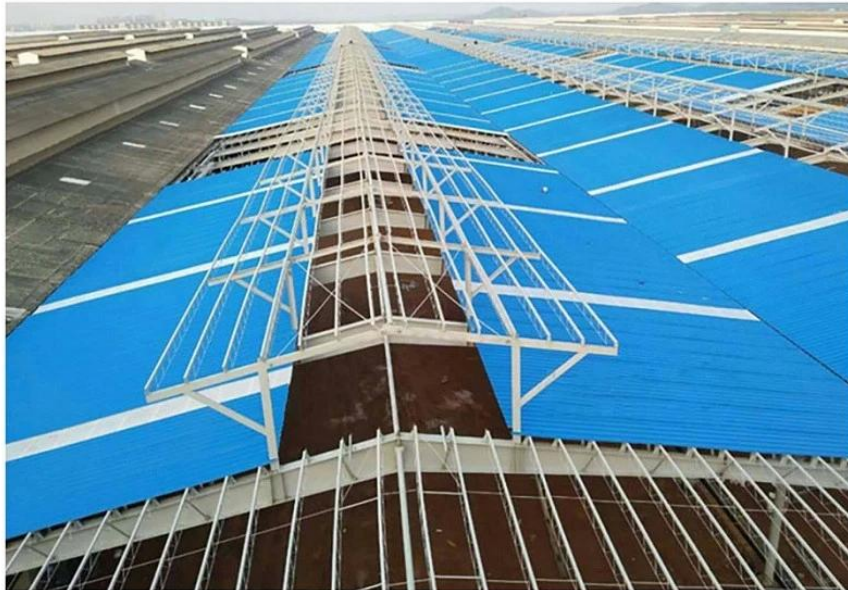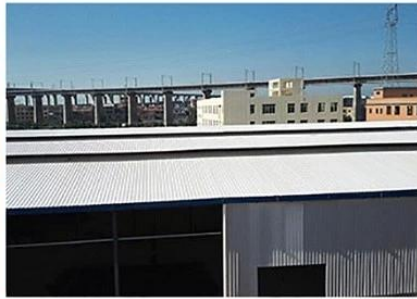


Certificate



Exhibition



Packaging



FAQ

000000 0000 000000 ,000 000000 0000 0000 000 00 .00000 000000 00000000 0000 00 ,000000 0000 000000 ,00*
.00000 000000 000000 000000 000000 000000 0000 000 ,00 000000 000 00000000

¿Qué tipo de información se puede obtener de un análisis de ADN?

?□□□□□ □□□□□ □□ □□□□□□ □□□*

*?□□□□□ □□ □□□□□□ □□□□ □□ □□□□□□ □□ □□□□ □□□□ □□□ □□□

*□□□□□ □□□□ □□ □□□□ □□□□ □□□□?

*? 0000 0000 0000 0000

000000*: T/T 30% .000000 0000 0000 ,0000
 .30% 00 000000 0000 000000 0000 7 0000 :000000 000000 0000 ?

Figure 1. The effect of the number of trials on the number of correct responses. The number of correct responses was significantly higher for the 10 trials condition than for the 5 trials condition. Error bars represent the standard error of the mean.


Product show



XXXX XX	XXXXXXXX XXXXXX "XX XX
XXXX	ZXC
XXXX XXXXX	XX ,XXXXXXXX XXXX ,XXXXX XX (Mainland)
XXXXXXXX	,XXXXXXXX XXXXXXXXXXXX ,XXXXXXXX XXXXXX XXXXX XXXXXXXXXXXXXXXX XXXXX XXXXXXX XXXXXXX ,XXXX XX
XXXXXXXX	25 XXXX
XXXXX	ISO9001 / SGS / CE
XXXXXXXX XXXXXXXX XXXX	100 "X
XXXXX XX	1x20GP 1 ,XXXX 6 XXXXx40GP XXXX 7 XXXX
XXXXX XXXXX	XX XX XXXXX XX 13500 XXXX ,XXXXX XXXX 8 XX XX
XXXXX XXXX	T/T, XXXXXXX XX XX XX XXXX XXXXX XXXX ,30% XX XXXXXXX XX XXXXX L/C ,
XXXXX	XX XXXX XXXX XXXXX (FCL), .XXXXX XX XXXXX XX XXXX XXXX XXXXXXX XXXX (LCL), XX XXXXX XXXX XXXXXXX XX XXXXXXX XX.
XXXXXXXXXX	XX XXXX XXXX PE
XX	XXXXX / XXXX / XXX'XXXXXXXX
XXXXXX	,XXXXXXXX XX ,XXXXX ,XX ,XX XXXXX ,XXXX XXXXX XX ,XXXXXXXX XXXX XXXXXXX ' ,

電話 號碼	#1050-160-30
電話機	自動式 電話機
電話機 號碼	1050 〇〇〇
電話機 號碼	960 〇〇〇
電話機號碼	2.3 〇〇〇 3.0 / 〇〇〇 2.8 / 〇〇〇 2.5 / 〇〇〇
電話機	自動式 電話機 電話機 電話機
電話機	電話機 電話機 / 電話 電話 / 電話機 電話機 / 電話機 / 電話機 / 電話機
電話機 電話機	160 〇〇〇
電話 電話機	30 〇〇〇
電話 電話機	219 〇〇〇
電話機號碼 電話機	660 〇〇〇

More Types

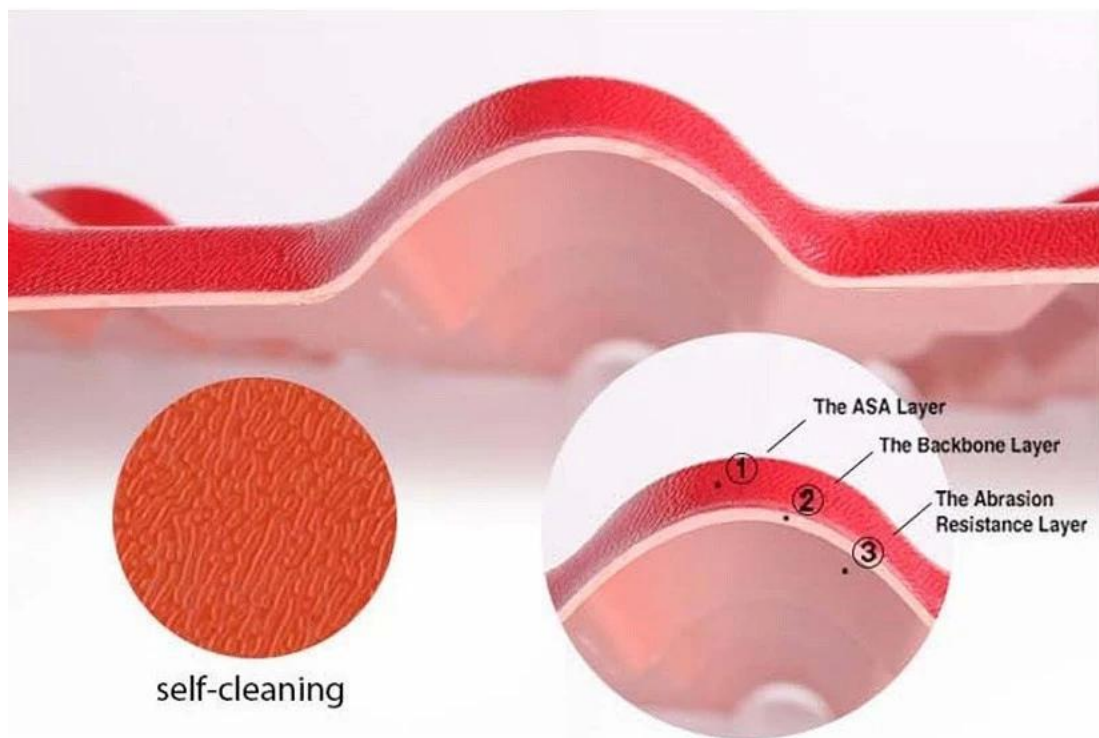

--	--	--	--	--	--	--

[illegible]

၀၀၀၀ ၀၀၀၀၀ ၀၀၀၀ ၀၀၀၀ ၀၀၀ ၀၀၀ .1:1 ၀၀၀ ၀၀၀၀၀၀၀၀၀၀၀ ,၀၀၀၀ ၀၀၀၀၀ ၀၀၀၀၀၀ ၀၀၀၀၀၀၀၀၀၀ ၀၀၀ ၀၀၀၀၀ :၀၀၀၀၀၀
 .၀၀၀၀၀ ၀၀ ၀၀၀၀၀၀၀၀ ၀၀၀၀၀ ၀၀ ၀၀၀၀၀ ၀၀ ၀၀၀ .၀၀၀၀ ၀၀၀၀၀၀၀၀

000000.000000 0000000 000000 0000 000 ,00000 000000 000000000000 00 000 000000 000000 :000000
 .00000000 000000 0000 000 0000000 00 000 .000 00000 0000 000 000 000 0000 00 00000000

□ □ □ □ □

(附錄 10 附錄) 附錄 附錄 附錄 .

이 실험에서 모든 실험은 20°C에서 수행되었으며, UV-B 광원은 200 W의 UV-B 램프를 사용하여 100 μmol photons m⁻² s⁻¹의 광도에서 실험을 수행했습니다. 실험은 100 μmol photons m⁻² s⁻¹의 광도에서 실험을 수행했습니다. 실험은 100 μmol photons m⁻² s⁻¹의 광도에서 실험을 수행했습니다.

☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ .

[illegible]

☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ .

[illegible]

□□□□ □□ □□□□ □□□□□□ •

00 000000 000 ,00000 0000 00000 0000 · ≥ B1 000 000 0000000 00000000 000000 000 00 00000 000
 GBB8624-2006.

- | | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|

--	--	--

--	--	--	--	--


--	--	--

[illegible]

□ □ □ □ □ □ □ □ □ □ □ •

[illegible]

resin roof tile accessories

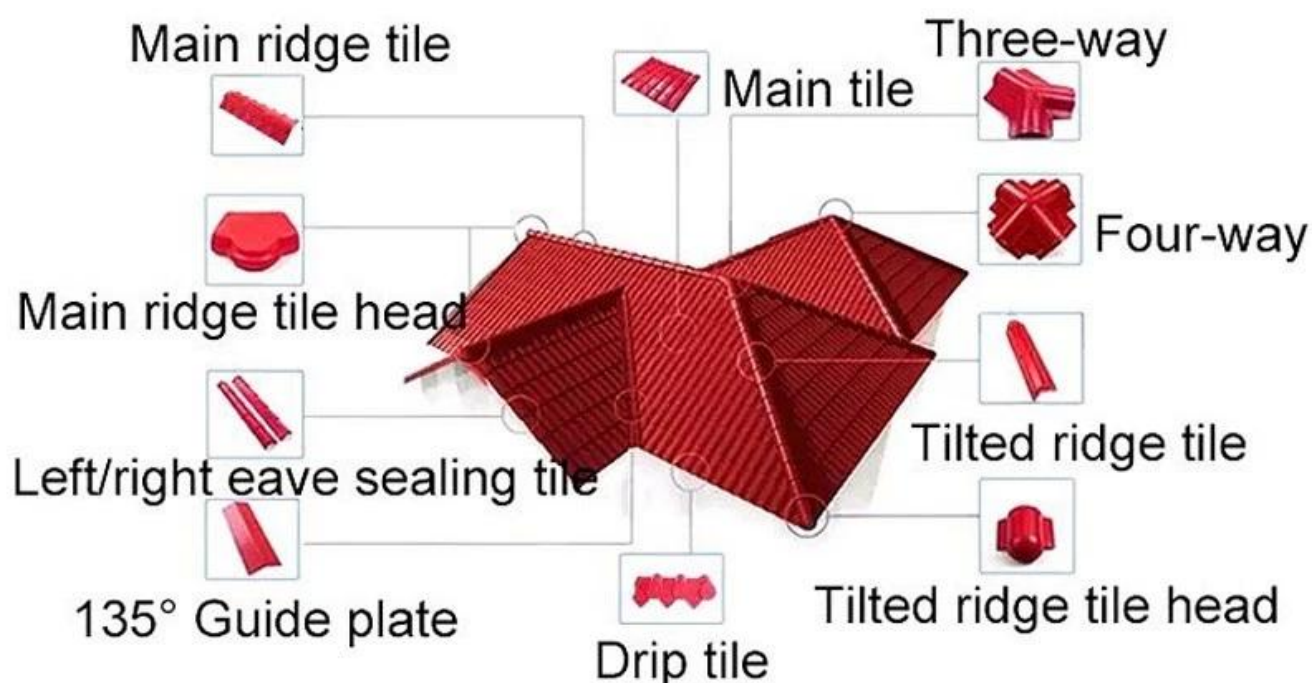

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5




▶ Step6


Our Factory



Engineering case

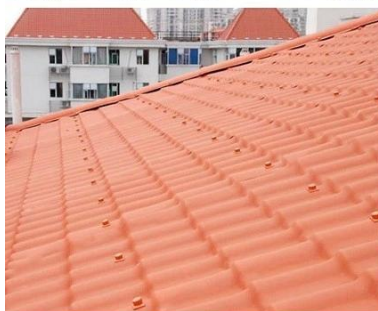

Certificate

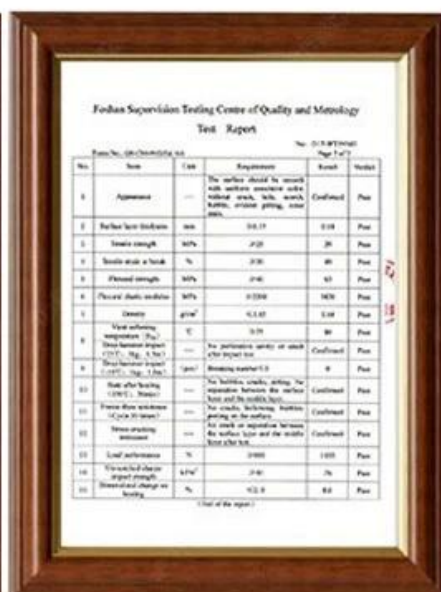

Packaging



Panel Size		2.3 inch	2.5 inch	2.8 inch	3.0 inch
Resolution (mm/inch)		4.6	5.0	5.6	6.0
Panel Type / Application	20 GP (21 inch)	4500	4200	3750	3500
	40 GP (26 inch)	5600	5200	4600	4300

Notes:

- Panel size is measured diagonally.
- Resolution is in pixels.
- Panel type is standard or high brightness.
- Panel application is general purpose or industrial.
- Panel price is based on quantity.
- Panel lead time is 4-6 weeks.

For more information, please contact us at: sales@panel.com

FAQ

- * What is the minimum order quantity?
The minimum order quantity is 1000 units. For larger quantities, please contact us for a quote.
- * What is the lead time?
The lead time is 4-6 weeks. For urgent orders, please contact us for a quote.
- * What is the warranty?
The warranty is 1 year. For more information, please contact us.
- * What is the payment terms?
The payment terms are 30% advance payment and 70% payment upon delivery.
- * What is the shipping method?
The shipping method is by air or sea. For more information, please contact us.
- * What is the OEM & ODM service?
We provide OEM & ODM service. For more information, please contact us.

* តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី?

* តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ , តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ .

* តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ , តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ ?

* តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ , តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ . តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ . តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ .

* តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ ?

* តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ , តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ .

? 30% តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ 7 ថ្ងៃ : តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ .

? តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ FOB: តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ , តើ អ្នក ចង់ ទិញ ឬ លក់ អ្វី ដែរ .