


Product show

ZXC 00000 0000 000 0000 00000 000 .000000 0000 30 ,0000 000000 000 000000 000 000000 00000 000000 00000 000 .0000 000 0000 00000 .0000 0000000 00000 0000 0000 0000 0000000 0000000 000 0000 000 ,000000 ,0000 00000 ,00000 0000 0000000 .0000000 0000000 0000 00000000 000000 0000000 0000 ,000000000 00000 000000000 00000 0000000 000000 ,0000 0000 ,000000.

ASA SYNTHETIC RESIN ROOFING TILES


Scenic areas and the pastoral farmhouse use the most roofing tiles.

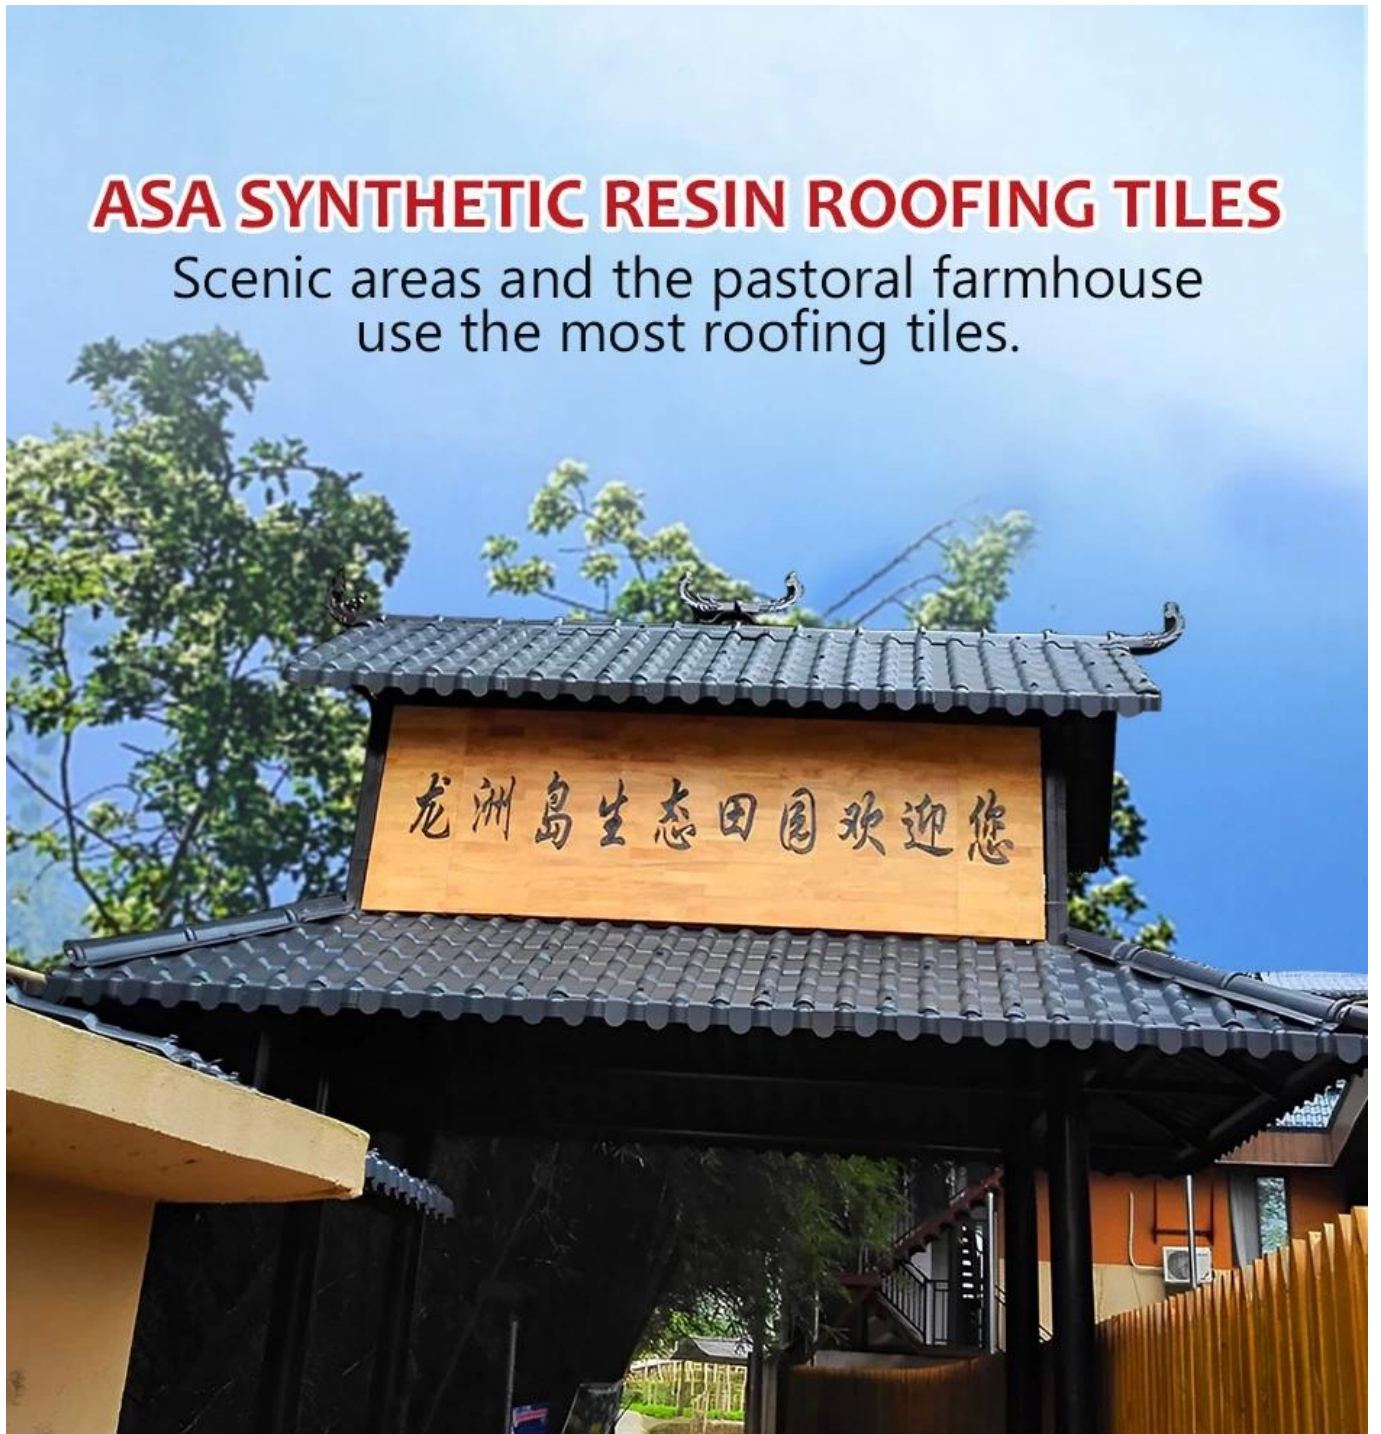



שם החומר	שם החומר
מיקוד	ZXC
מיקוד	(שם החומר, מיקוד החומר, מיקוד החומר)
מיקוד	מיקוד החומר, מיקוד החומר, מיקוד החומר, מיקוד החומר, מיקוד החומר
מיקוד	25 מיקוד
מיקוד	ISO9001 / SGS / CE
מיקוד	1x20GP 1, מיקוד 6 מיקודx40GP 7 מיקוד
מיקוד	219 מיקוד
מיקוד	1050 מיקוד
מיקוד	960 מיקוד
מיקוד	מיקוד / מיקוד 2.5 / מיקוד 2.8 / מיקוד 3.0 / מיקוד 2.3
מיקוד	מיקוד מיקוד מיקוד מיקוד
מיקוד	160 מיקוד
מיקוד	30 מיקוד

ללמוד 'יותר ASA של PVC נקישה סיטונאות יריעות גג

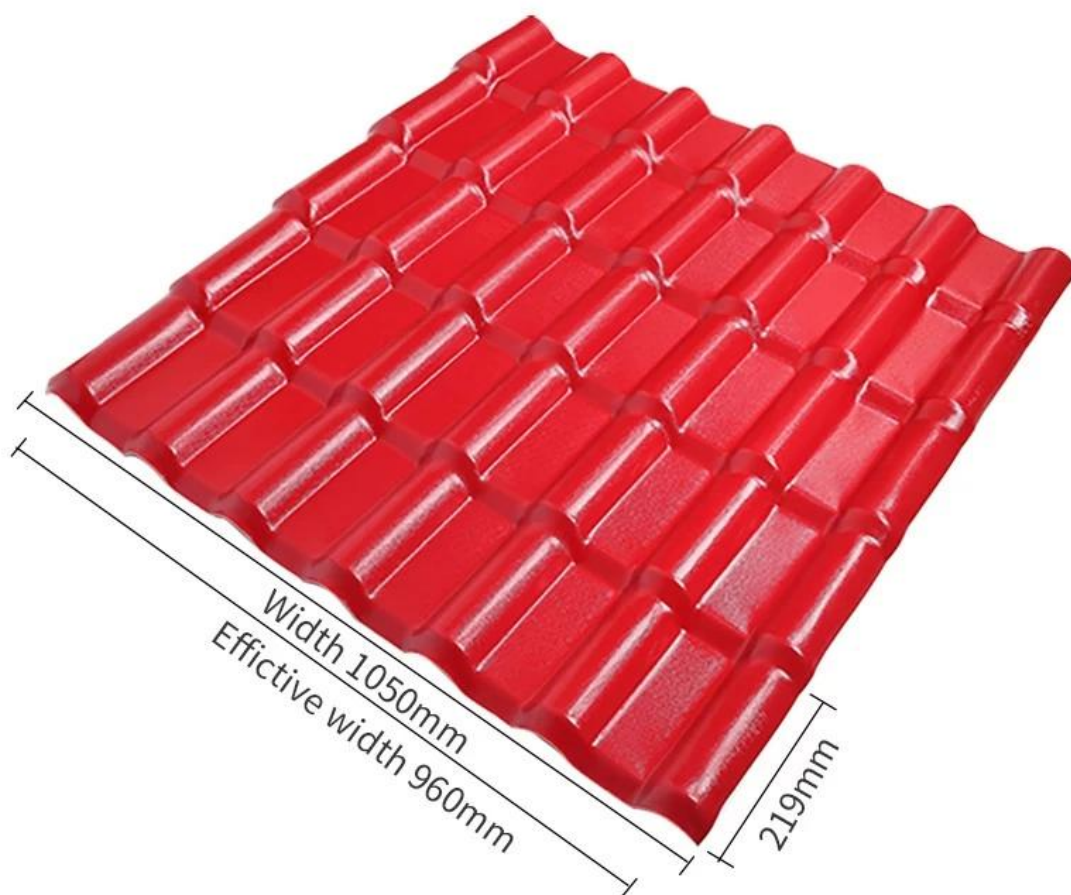

Name: synthetic resin

Model:1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

Dimensional measurement method


both sides

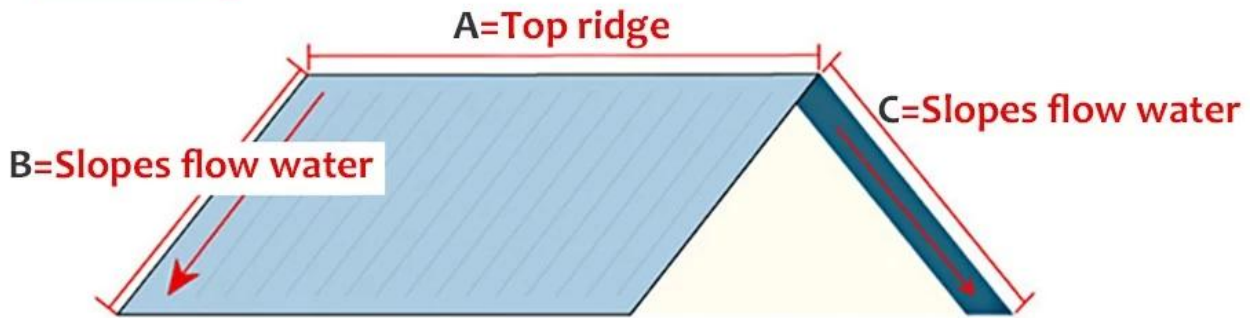

1. Measure the dimension of the **A** top ridge.
2. Measure the dimensions of **B**
3. Measure the dimensions of **C**

Measure all the dimensions (don't forget the eaves)


four sides

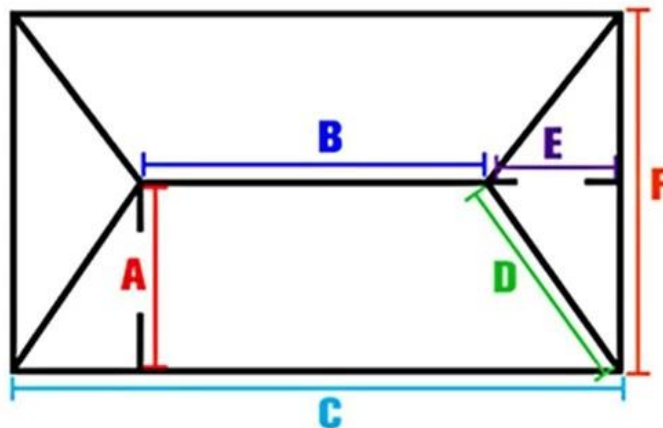

1. Measure the dimension of the **B** top ridge.
2. Measure the dimensions of ramp **A**
3. Measure the width of **C**
4. Measure the dimensions of the **D** diagonal ridge.
5. Measure the dimensions of ramp **E**
6. Measure the width of **F**

Measure all the dimensions (don't forget the eaves)

Roofing accessories

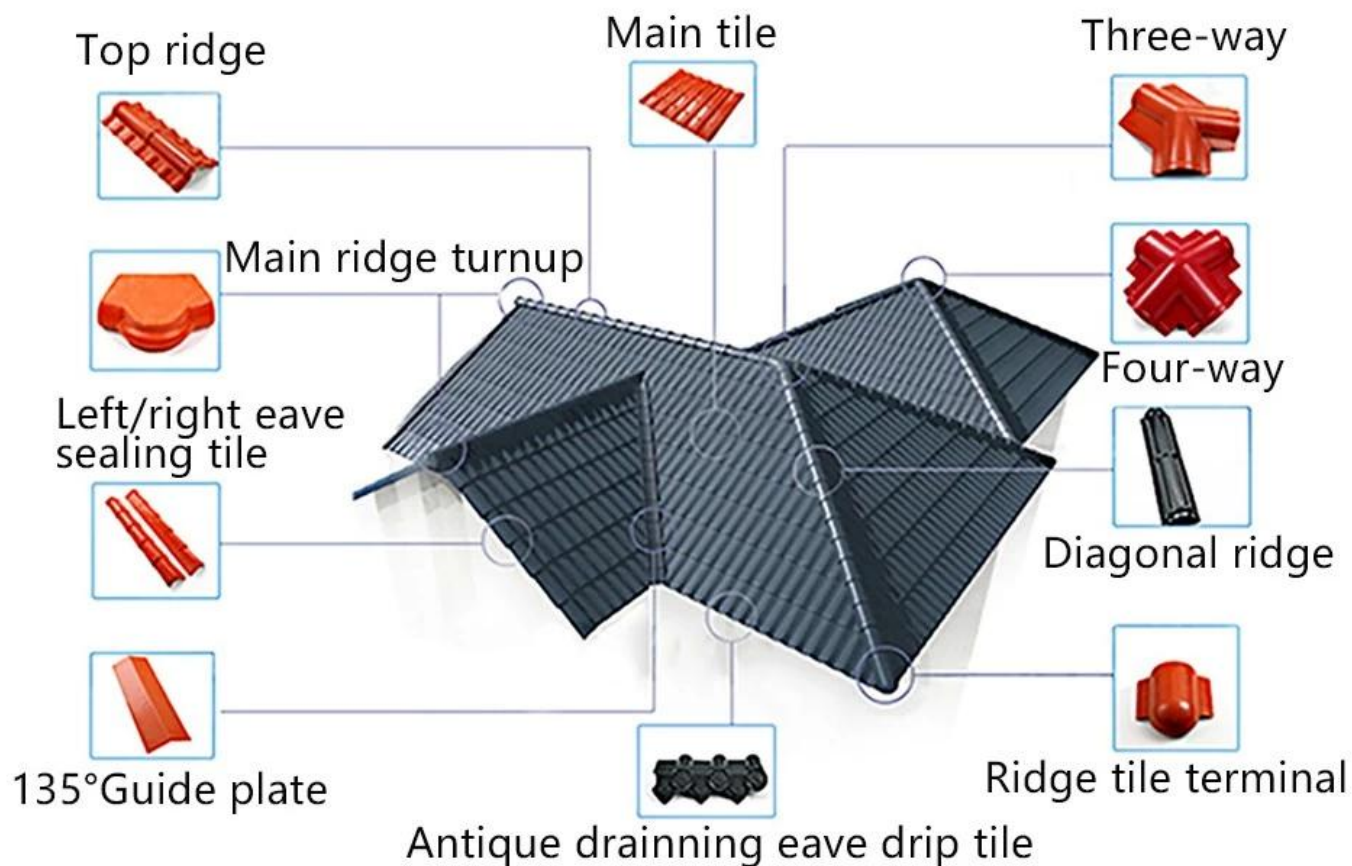

Installation considerations

- 1.The purlins can use square pipe (60x40x3mm)
- 2.The purlins can use C-shaped steel (100x50x20x3mm)
- 3.The purlins can use anti-corrosion wood square (60x40mm)
- 4.purlin spacing of 660mm

Our Factory

Zhongxingcheng New Material Co., Ltd 专业生产 各种规格 的 PVC, ASA, APVC, PVC, FRP, PVC, 等 各种 塑料 型材 产品。



Factory display



9 production lines



Raw material warehouse



Product comparison

Learn all about our products

Dacheng resin roofing tile

Recyclable resin roofing tiles



Brand new raw materials imported
bright color, long service life
30~50 years



Recycled materials, dull color, easy
to have black spots in appearance
very short life.



Brand new material, good
plasticization, long service life



Recyclable material, reduced
toughness, many impurities,
easy to break



ASA surface thickness 0.1~0.15mm
does not foam and does not fall off



The thickness of the surface layer of
the film is 0.05~0.1mm, which is
easy to blister and fall off

Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.




IOS9000 certified



China Metrology Certification



CAL certification

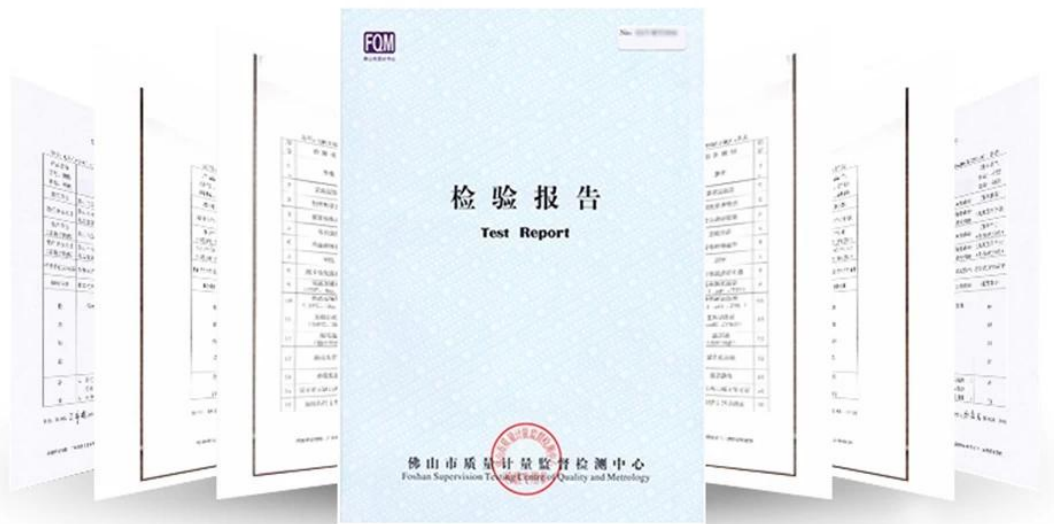

Packaging



FAQ

*?..... ..

..... ..,..... ..*
..... ..,..... ..

?..... ..*

..... ..*

?..... ..*

Q: What is your company's main product? A: We are a professional manufacturer of various types of shoes, including men's, women's, and children's shoes. We have a rich experience in shoe production and a complete production line.

Q: Do you have any certifications? A: Yes, we have ISO 9001 and ISO 14001 certifications.

Q: How long has your company been in business? A: Our company has been in business for over 10 years, with a strong reputation in the market.

Q: What are your main markets? A: Our main markets are Europe, North America, and South America.

Q: How do you ensure the quality of your products? A: We have a strict quality control system, from material selection to final inspection, ensuring every pair of shoes meets our high standards. We also have a professional design team to create unique and fashionable styles.

Q: What are your payment terms? A: We accept T/T, L/C, and other payment methods.

Q: What is your lead time? A: Our lead time is approximately 30 days, depending on the quantity and complexity of the order.

Q: How do you handle after-sales service? A: We provide excellent after-sales service, including product replacement and repair services.

Q: What are your shipping methods? A: We offer various shipping methods, including air, sea, and land transport, to meet different customer needs.