


Product show

ZXC ASA [Synthetic Resin Roof Tile](#) Wholesales, If your order matches our stock size details, we can faster delivery time.



1. A variety of raw materials by a certain percentage mixing, into the hopper
2. The mixed raw materials are pre-formed and heated to become flat tiles
3. Then through the mold pressure, plastic molding, cooling, through the traction machine slowly introduced
4. To achieve the length of customer needs cut off. after artificial out

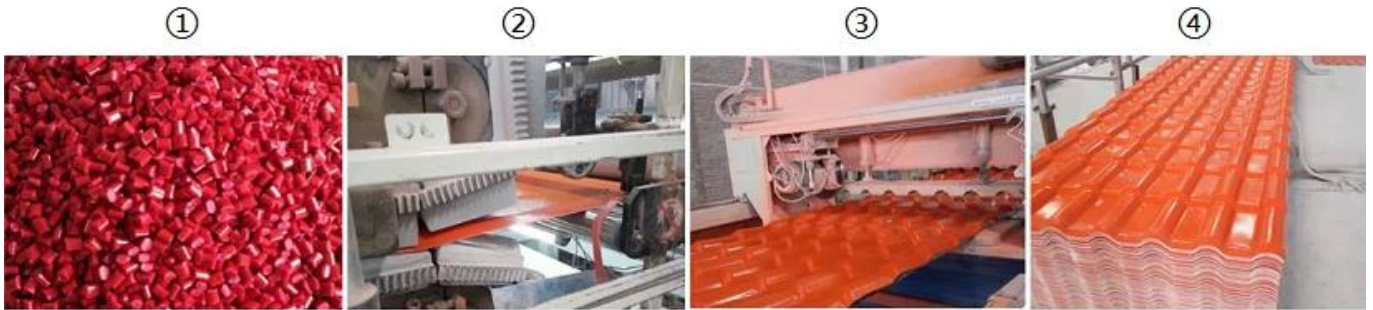



产品名称	Spanish Style ASA Roof Tile
品牌	ZXC
产地	Foshan city,Guangdong province,China(Mainland)
材料	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
规格	25 平方
认证	ISO9001 / SGS / CE
最小起订量	100 square meter
交货期	1x20GP for 6 days,1x40GP for 7 days
生产能力	We have 8 produce lines,about 13500 square meter every day
付款方式	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,

□□□□	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
□□□□□□□□	Pallet or PE bag
□□□	Guangzhou / Shenzhen / Foshan
□□□□□	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc

□□□ □□□□	#1050-160-30
□□□□	Spanish Style
Overall Width	1050mm
Effective Width	960mm
□□□□□□	2.3mm / 2.5mm / 2.8mm / 3.0mm
□□□□	□□□□□□ □□ □□□□□ □□□□□ □□□□
□□□□□	Orange / Red / Grey / Sky blue / Dark green/Customized
Wave Spacing	160mm
Wave Height	30mm
Section Length	219mm
Purlin Spacing	660mm

More Types



□□□□□□

Surface:Imported ASA raw materials from the world's top 500 GE company,Super weather resistance, truly 10 years don,t have color fading.The standard is that the thickness of the surface reaches 0.15mm,We can reach 0.15-0.18mm.

Medium:The material is Polyvinyl chloride and Calcium powder,the proportion is 1:1.This is the best ratio after many trials.This ratio guarantees the strength and toughness of the product.

Bottom:The important material also is Polyvinyl chloride and Calcium powder,but add other chemical materials.We are make the same color as the surface color and white color.Gloss of products is best in the industry.

Feature

• Long-lasting Color (at least 10 years)

· The product features ultra durability in natural environment.Even under tough conditions of exposure to UV,high temperature and freezing coldness,it still keeps stable color.

• Excellent Anti-corrosion performance

· Synthetic Resin Tile can resist longterm acid ,alkali and salt corrosion ,etc.Tests have proved that there would be no chemical reaction after soaking in salt and alikali and various acid under 60% .It is ideal for application in areas where acid rain is □□□□□□□□.

• Good Waterproofing Performance

· Synthetic Resin Tile selects highly weater-resistant resin,which is dense and absorbing no water,with no pore penetration problem.The product is 45% wider than traditional tiles with less roof contact,so synthetic resin,s waterproof performance has greatly increased than traditional tiles.

• Strong Fire Resistance

· Belonging flame retardant material,with fire resistance \geq B1 as tested by national authoritative departments according to GBB8624-2006 standard.

• Excellent Heat Insulating Property


· The heat conductivity coefficient is 0.325w/m.k,about 1/300 of clay tile ,1/50 of cement tile,and 1/2000 of thick color steel tile.Therefore without condidering ading heat-preserving layer ,the heat insulation and heat preservation of synthetic resin tile can still be optimized.

• Good sound insulation

· Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

□□ □□□ [ASA PVC Roof Tile Suppliers](#) □□□□ □□□□

resin roof tile accessories

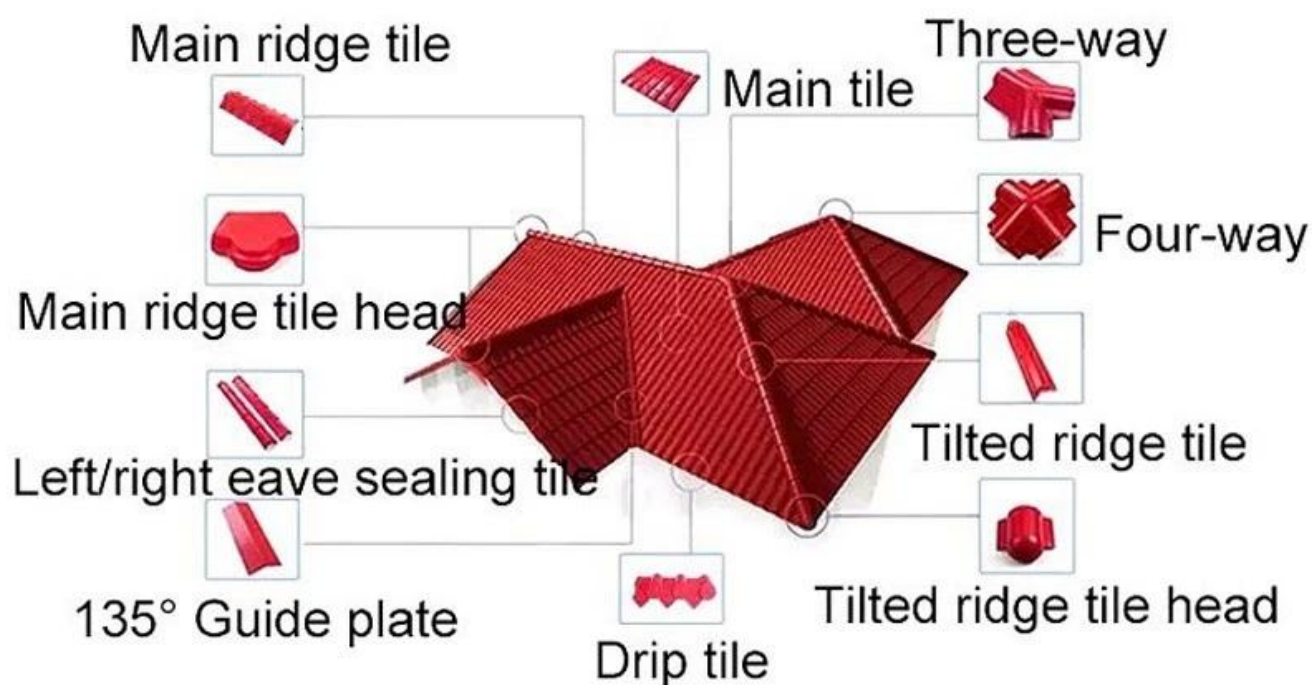

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory



Engineering case



Certificate



Packaging



- 000000 000000 00 000000 0000?

- 000000 000000 000000 0000 00 ,00000 0000000 00000 00 0000 0000.

- 000000 0000000 0000 00000 00 000000 00000000 000000000 00000 00000 0000?

- 00 0000 0000 0000 ?00000000 00000 00 000000 00000 0000 ,00000 000000000 00 00000 00000000 0000000 .00000000 0000000 ,00 00000 00000000 00000.

- 0000 00000 00000 0000?

- 000000: T / T 30% 00000000 00000 00000 ,00000.

• 30% 000000000 00000 000000 0000 7 00000 :00000000 0000 0000000

• 0000000 0000 FOB: Foshan, 000000 ,000000000