

Product show

□□□□□ □□□□□ :□□□□□
□□□□ □□ □□□□ 10 :□□□□ □□□
□□□□□ □□□□□ :□□□□□
□"□ 3.0 ,□"□ 2.8 ,□"□ 2.5,□"□ 2.2 ,□"□ 2.0 ,□"□ 1.8 :□□□□□
□"□ 1130 :□□□□□ □□□□□
1050 / 1000 :□□□□□ □□□□□mm
□□□□□ Purlin: 660mm
□□□□□ 3 :□□□□□□
□□□□□ / □□□□□□□ :□□□□□



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

More Types

1130 corrugaetd sheets



1130 trapezoidal sheets




900 high wave



980 high wave



PVC accessories

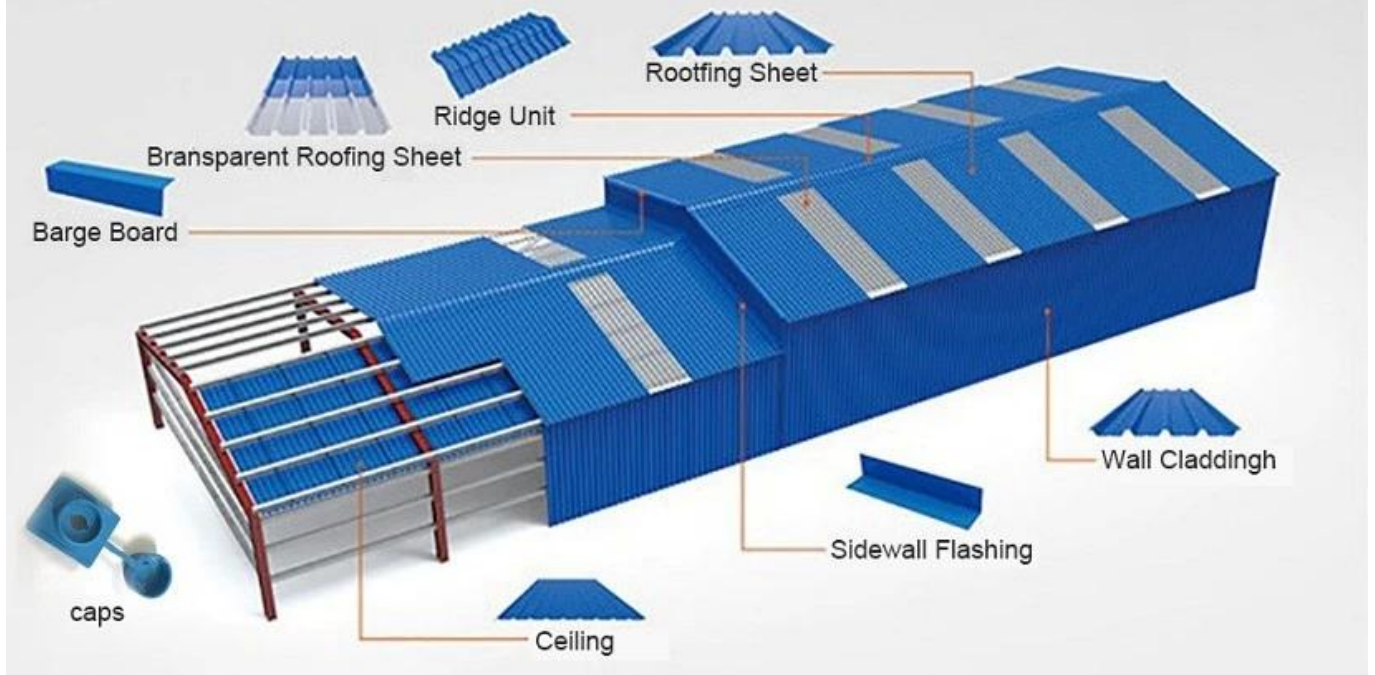

ZXC New Material Technology Co. 專業生產 PVC, ASA 各種
FRP, UPVC 各種 建築 材料 .

Our Factory



Engineering case



Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no stains, cracks or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and tolerance on warpage.	Confirmed	Pass
2	Walk resistance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.10	Pass
4	Slip-resistance	1/100	---	170	Pass
5	Flexure strength	Mpa	≥ 20	26	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 20°C)	---	No significant change in weight after 1h	Confirmed	Pass
8	Acid resistance (5% HCl, 24h, 20°C)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (5% NaOH, 24h, 20°C)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Impact resistance (1kg, 1m)	---	≤ 1/10	1/12	Pass
11	Change index	%	≤ 0.1	0.06	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible cracks, pits, scratch marks, surface pitting, color spots.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	Mpa	≥ 20	26	Pass
4	Flexure strength	Mpa	≥ 20	30	Pass
5	Flexural modulus	%	≥ 20	30	Pass
6	Water absorption (1h, 20°C)	---	No significant change in weight after 1h	Confirmed	Pass
7	Slip-resistance	1/100	---	170	Pass
8	Water absorption (24h, 20°C)	---	No significant change in weight after 24h	Confirmed	Pass
9	Acid resistance (5% HCl, 24h, 20°C)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Alkali resistance (5% NaOH, 24h, 20°C)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
11	Impact resistance (1kg, 1m)	---	≤ 1/10	1/12	Pass
12	Change index	%	≤ 0.1	0.06	Pass



Exhibition



Packaging



FAQ

* ?

. *

? *

. *

? *

. *

? *

. *

* ?

. *

* ?

.

* ?

.

30% 7 •

. • FOB: Foshan,