
| | PVC anti-corrosion plastic roof sheet | | | |
|-----------|--|--|--|--|
| | ZXC | | | |
| | Foshan city, Guangdong province, China (Mainland) | | | |
| | Polyvinyl chloride, Calcium powder, other chemical materials | | | |
| | 10 000 | | | |
| | ISO9001 / SGS / CE | | | |
| | 300 square meter | | | |
| | 1x20GP for 6 days,1x40GP for 7 days | | | |
| | We have 8 produce lines, about 13500 square meter every day | | | |
| 0000 0000 | $\ensuremath{\text{T/T}}$, firstly pay 30% deposit, before loading container pay rest of payment L/C , | | | |
| 00000 | Full Container Load (FCL) Service, We do it by myself. Less than Container Load (LCL) Service, We find our agents to do it. | | | |
| | Pallet or PE bag | | | |
| | Guangzhou / Shenzhen / Foshan | | | |
| | Factory, Warehouse, Farm, Market, Aisle. Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant | | | |



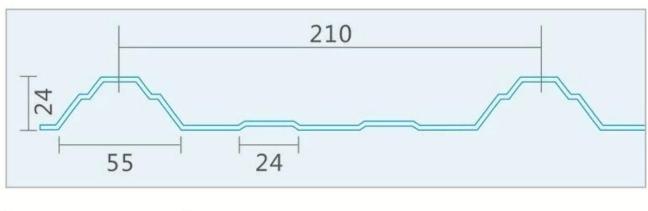

1130mm(Effective Width:1050mm)

#1130-210-24 Trapezoid type

1130mm Overall Width Effective Width 1050mm


1.3mm / 1.5mm / 1.8mm / 2.0mm / 2.3mm / 2.5mm / 2.8mm /


3.0mm


□□□□□ White / Blue / Green / Red / Customized

Wave Spacing 210mm
Wave Height 24mm

 $\begin{tabular}{lll} \hline \end{tabular} One \ layer \mbox{/ Two layers / Three layers} \\ \hline \end{tabular}$

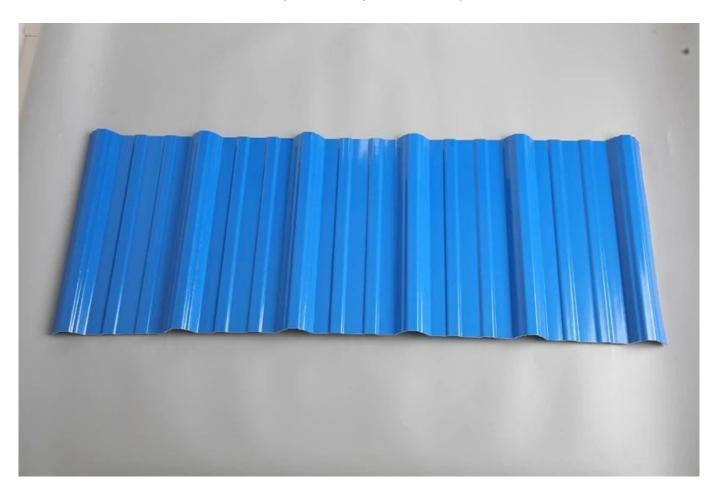

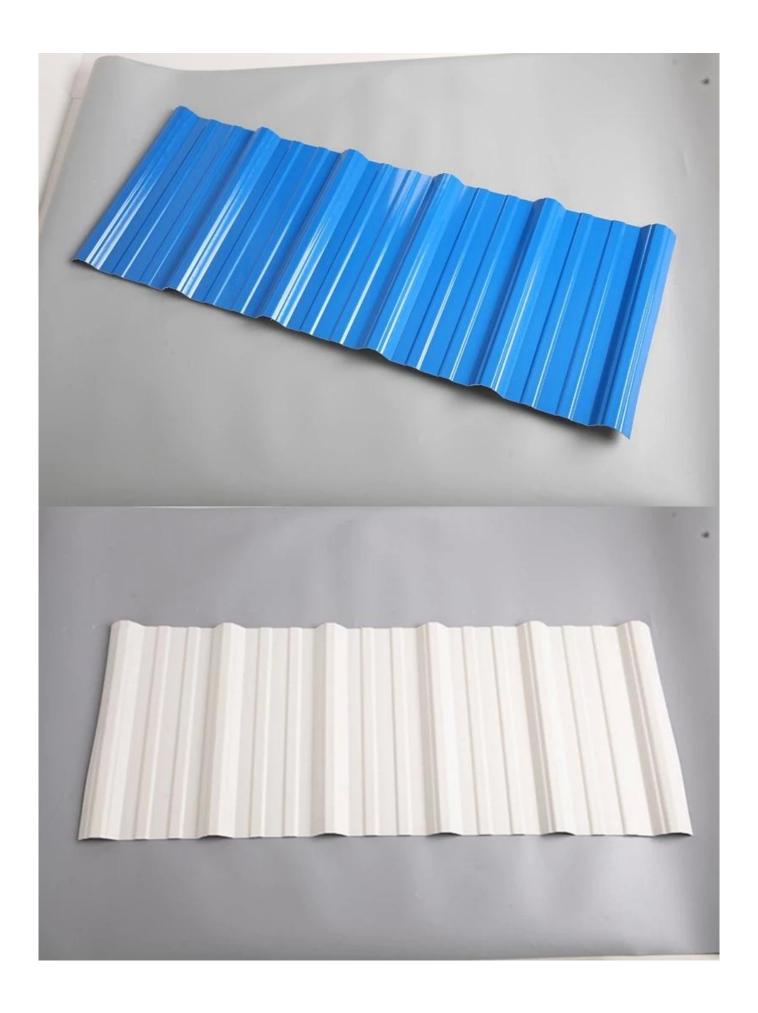

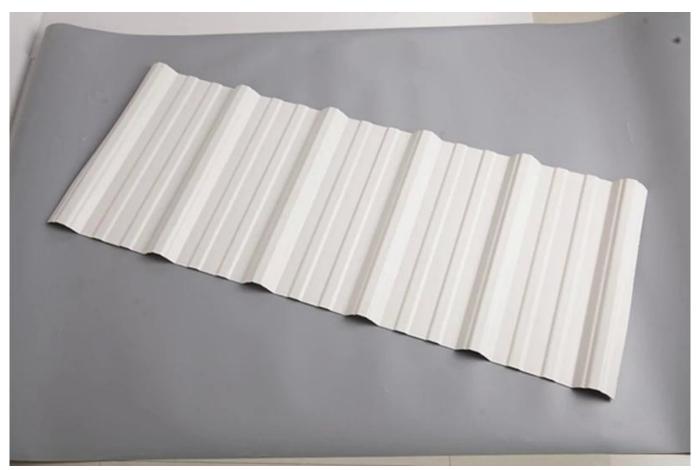

Feature

• Anti-corrosion

• ZhongXingCheng PVC plastic roofing sheet in the long term against acid, alkali, salt and other corrosive chemicals. Experiments prove that: In the salt, alkali and 60% following a 24-hour soaking in acid, no chemical reaction. Very suitable for acid rainprone areas and coastal use, the effect was particularly significant.

• חחח חחחח

• ZhongXingCheng PVC plastic roofing sheet's surface materials is co-extruded in ultra-weather surface layer resin to ensure the durability of products (for 15 years in quality assurance).

• 000 00000

• ZhongXingCheng PVC plastic roofing sheet is a flame retardant materials, through the national fire authority of the department according to GB8624-2006 standards for testing, fire safety performance \geq B1 grade.

Heat Insulation

 \bullet ZhongXingCheng PVC plastic roofing sheet's thermal conductivity coefficient is 0.325w/mk, clay tile is about 1 / 310, cement tile 1 / 5, 0.5mm thick color steel tile 1 / 2000. Therefore, without considering the case of insulation layer increases, the PVC plastic roofing sheet can still achieve the best thermal insulation properties.

• 00000 00000

• The tests prove that: in suffering heavy rain, high winds the impact of outside noise, ZhongXingCheng PVC plastic roofing sheet has a good absorption of the noise effect,noise down 30dB than color steel tile.