

Product show

ZXC [00000000 0000 00 0000 ASA](#) 0000 0000 000000 000000 0000 0000 000000 0000 .00000000 000000 30 ,00000000 000000 ,0000000000 0000000000 00000000 0000 .0000 0000 000000 000000 .0000 00000000 000000 000000 0000 000000 00000000 ,000000 0000 ,00000000 ,0000 000000 ,000000 000000 00000000 .00000000 00000000 000000 00000000 000000 000000 000000 00000000 000000 00000000 000000 ,0000 000000.


ASA SYNTHETIC RESIN ROOFING TILES

Scenic areas and the pastoral farmhouse
use the most roofing tiles.


A photograph of a traditional Chinese gate structure. The gate has a dark, tiled roof with ornate, upturned eaves. A large, light-colored wooden sign is mounted on the front of the gate, featuring the Chinese characters "龙洲岛生态田园欢迎您" (Longzhou Island Ecological Garden Welcomes You) in black calligraphy. The gate is set against a backdrop of lush green trees and a clear blue sky. The overall scene suggests a scenic or pastoral setting, likely a farm or a park.

ASA SYNTHETIC RESIN ROOFING TILES

Scenic areas and the pastoral farmhouse
use the most roofing tiles.

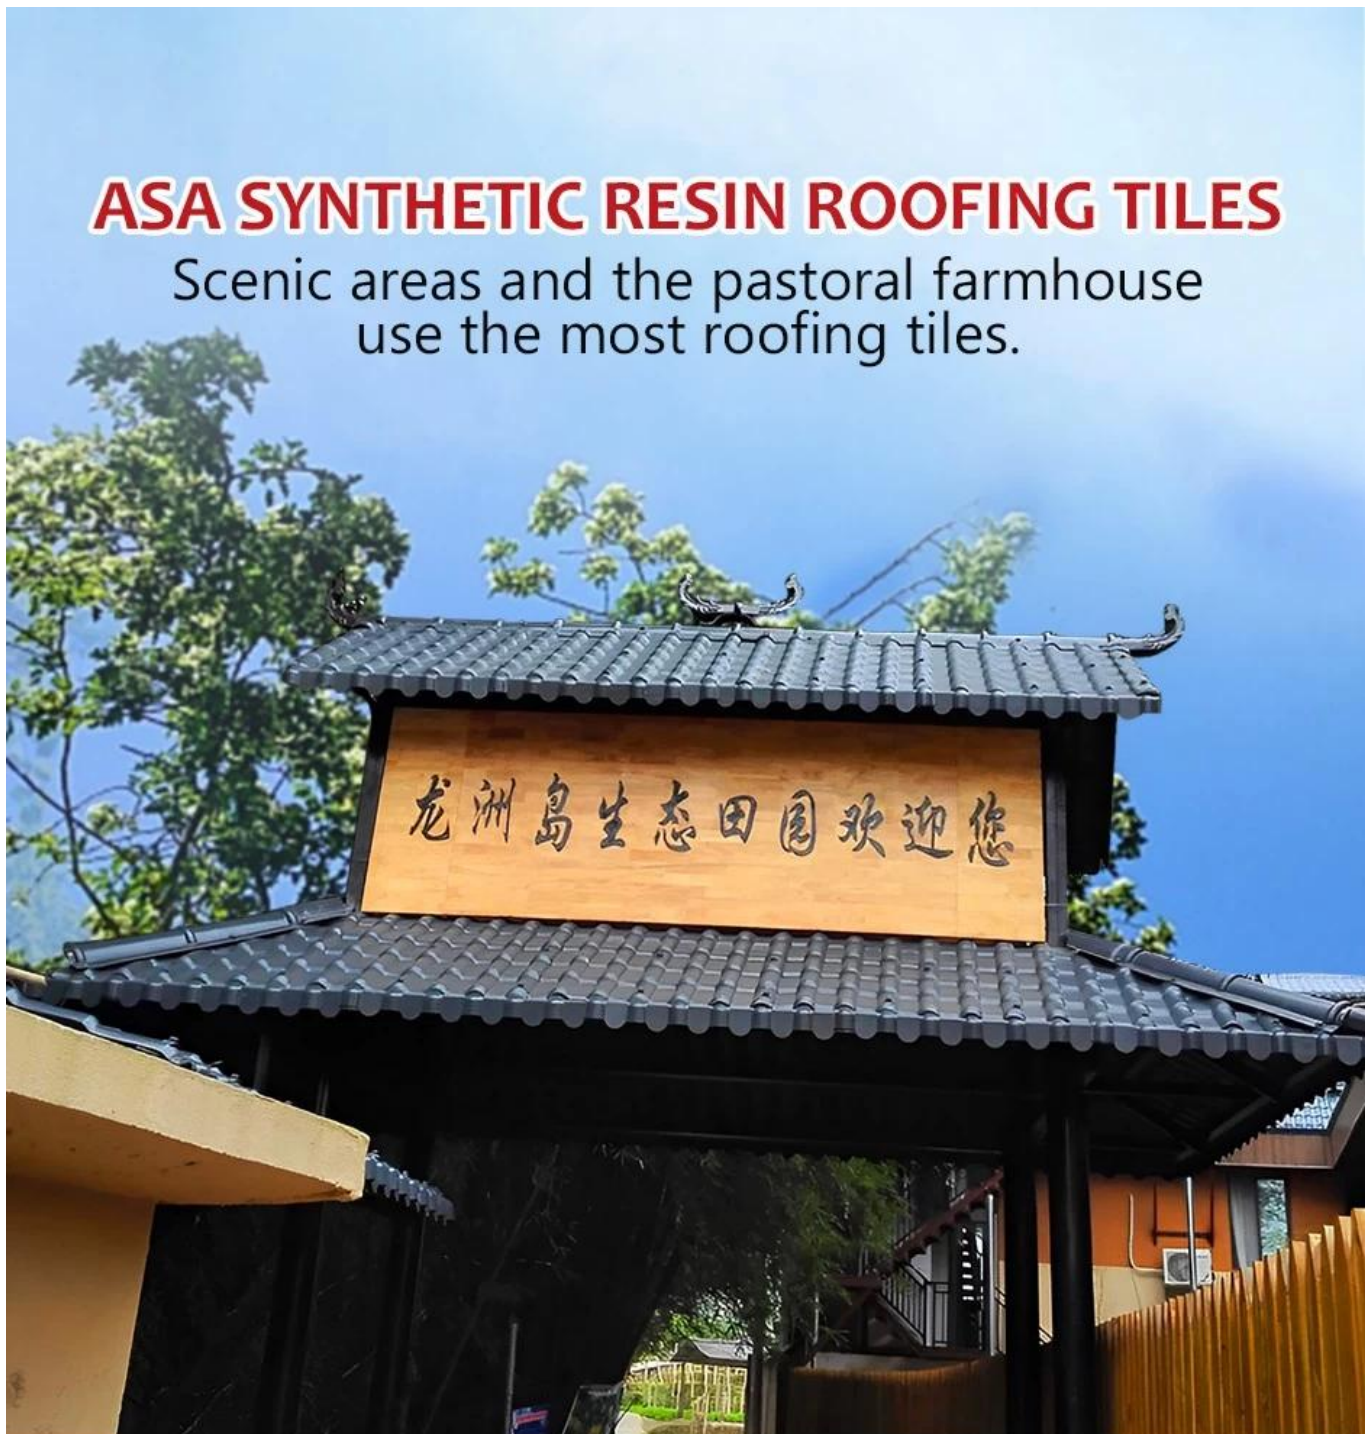A photograph of a traditional Chinese gate structure. The gate has a dark, tiled roof with ornate, curved eaves. A large, light-colored wooden sign is mounted on the front of the gate, featuring the Chinese characters "龙洲岛生态田园欢迎您" (Longzhou Island Ecological Garden Welcomes You) in black calligraphy. The gate is set against a backdrop of lush green trees and a clear blue sky. The overall scene suggests a scenic or pastoral setting, likely a farm or a park.



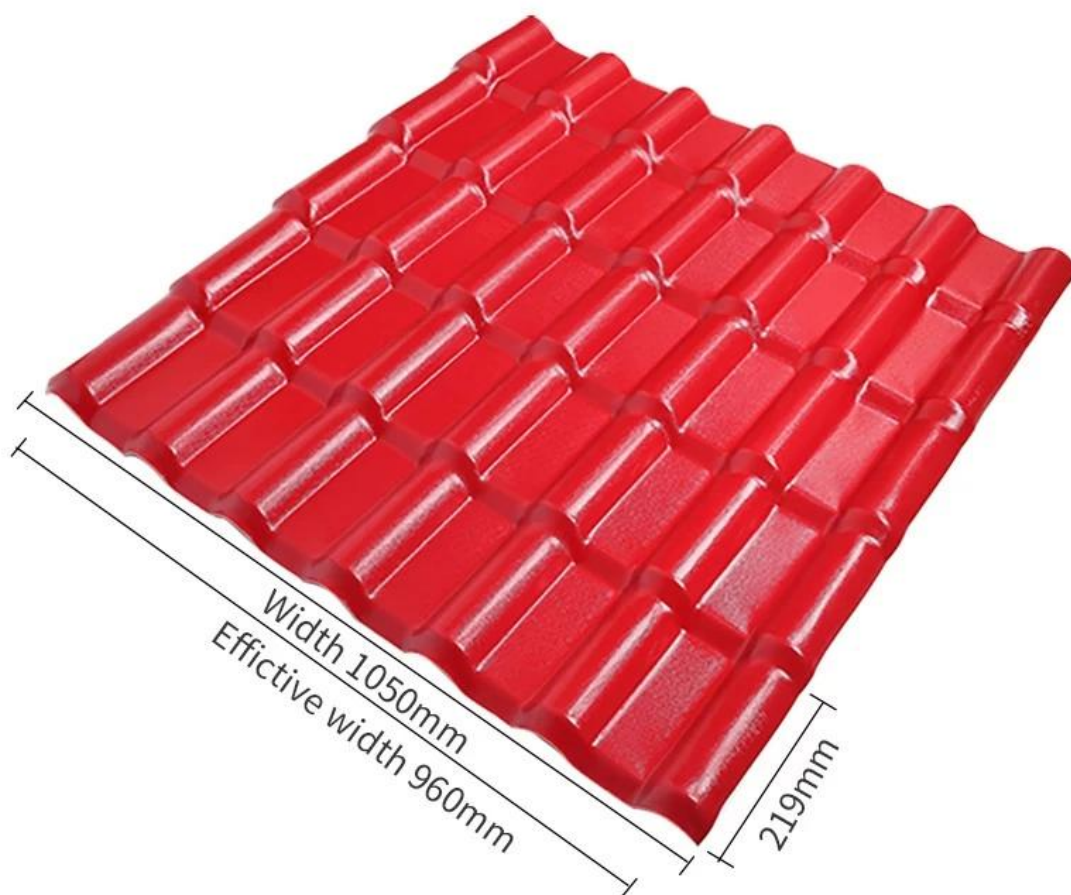

Name: synthetic resin

Model:1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

Roofing accessories

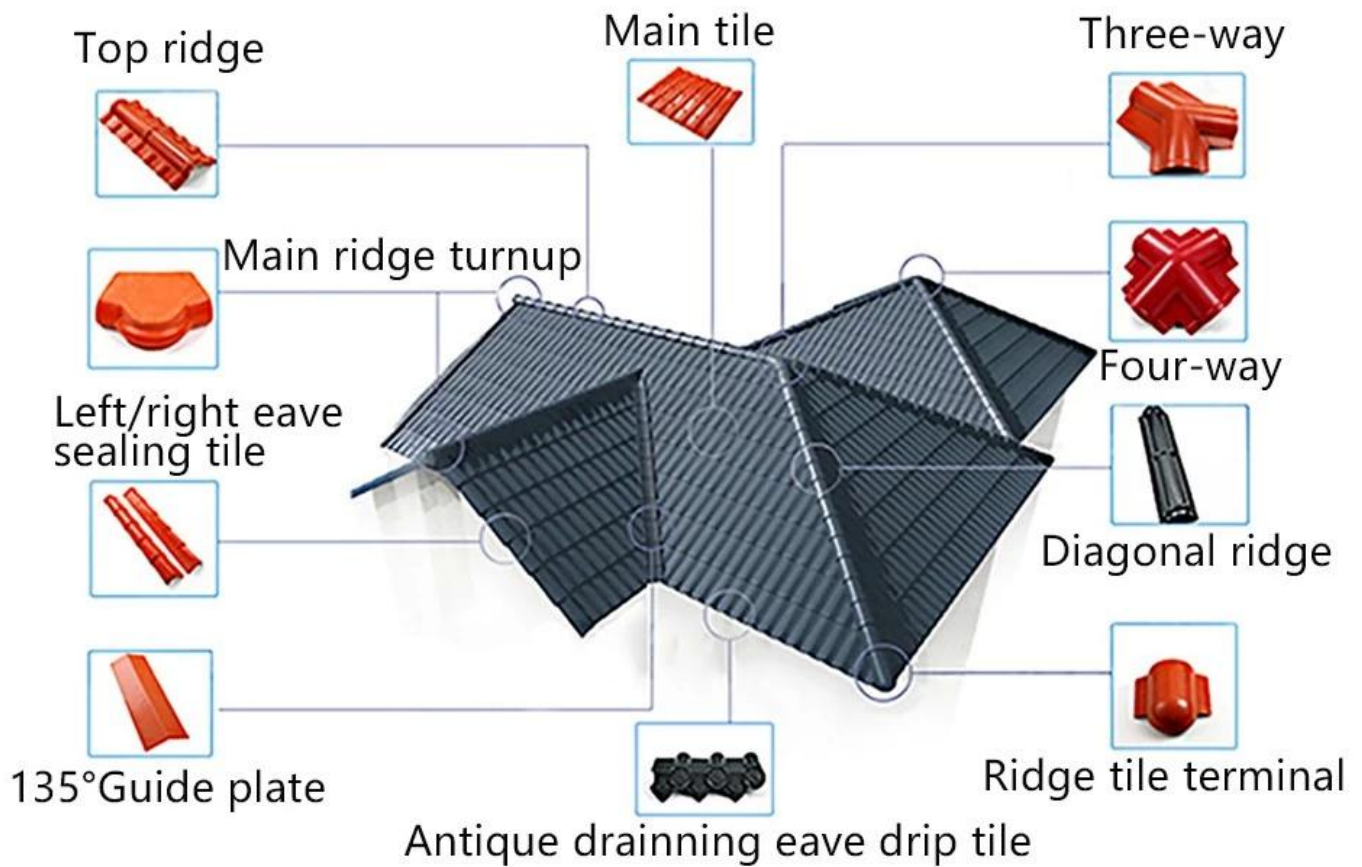


Installation considerations

1. The purlins can use square pipe (60x40x3mm)
2. The purlins can use C-shaped steel (100x50x20x3mm)
3. The purlins can use anti-corrosion wood square (60x40mm)
4. purlin spacing of 660mm

Dimensional measurement method


both sides

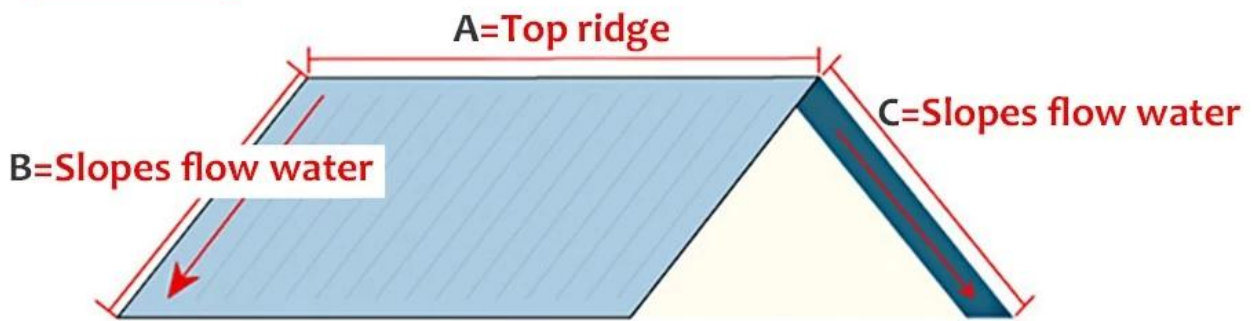

1. Measure the dimension of the **A** top ridge.
2. Measure the dimensions of **B**
3. Measure the dimensions of **C**

Measure all the dimensions (don't forget the eaves)

four sides

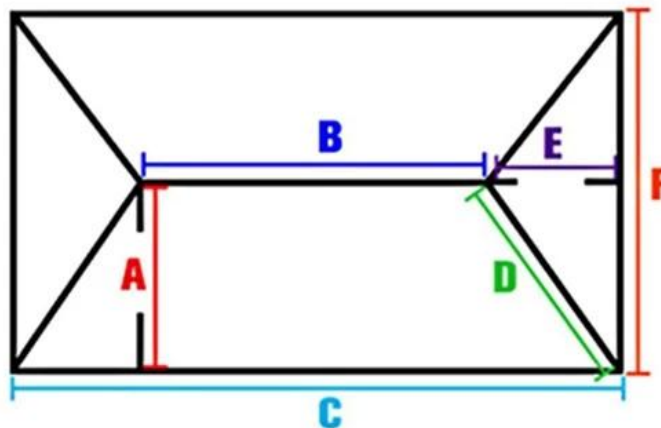

1. Measure the dimension of the **B** top ridge.
2. Measure the dimensions of ramp **A**
3. Measure the width of **C**
4. Measure the dimensions of the **D** diagonal ridge.
5. Measure the dimensions of ramp **E**
6. Measure the width of **F**

Measure all the dimensions (don't forget the eaves)

Our Factory

Zhongxingcheng New Material Co., Ltd 專業生產 各種規格 各種顏色 各種厚度 ,各種 各種 各種 ,各種 各種 各種 各種 各種 ASA, 各種 各種 各種 各種 APVC, 各種 PVC 各種 ,各種 各種 各種 PVC, 各種 PVC, 各種 各種 各種 FRP, PVC, 各種 各種 各種 各種.



Factory display



9 production lines



Raw material warehouse



Product comparison

Learn all about our products

Dacheng resin roofing tile



Brand new raw materials imported
bright color, long service life
30~50 years

Recyclable resin roofing tiles



Recycled materials, dull color, easy
to have black spots in appearance
very short life.



Brand new material, good
plasticization, long service life



Recyclable material, reduced
toughness, many impurities,
easy to break



ASA surface thickness 0.1~0.15mm
does not foam and does not fall off



The thickness of the surface layer of
the film is 0.05~0.1mm, which is
easy to blister and fall off

Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

*? 0000 00 0000 000 000

00000 0000 00000 ,000 00000 0000 0000 000 00 .0000 00000 000000 00000 00 ,00000 0000 00000 ,00* .0000 00000 00000 000000 000000 000000 00000 000 ,00 00000 000 00000000

[illegible]

? 0000 00000000 00 0000 000000 00 000000 00 00000 00000 0000 0000*

1. OEM & ODM. 2. MOQ 1000pcs. 3. Lead time 15-20 days.

4. Payment: T/T 30% in advance, 70% before shipment.

5. Shipping: FOB, CIF, DDP.

6. Quality: 100% inspection before shipment.