


Resin tile dormer modeling design



Product Name	Resin tile ZXC
Product Description	Resin tile ZXC, 25 years warranty, ISO9001 / SGS / CE
Material	1x20GP 1, 6x40GP 7
Weight	219 kg
Length	1050 mm
Width	960 mm
Thickness	2.3 mm 3.0 / 2.8 / 2.5 mm
Color	Red
Installation	160 mm

בקשה ספקי רעפי גג שרף סינתטי ללמוד 'יותר

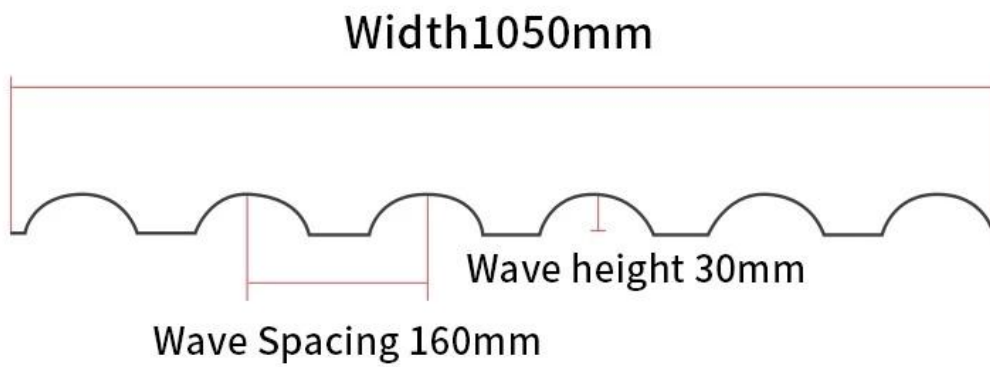

Brick red



Purplished red



Dark green



Gray




Blue

Application

- 1: It has long-lasting color
- 2: light weight,
- 3: self-waterproof,
- 4: tough, thermal insulation,
- 5: sound insulation
- 6: corrosion resistance
- 7: wind and shock resistance
- 8: hail resistance, and stain resistance
- 9: .Green environmental protection
- 10: fire prevention, insulation
- 11: easy installation

Dimensional measurement method


bothsides

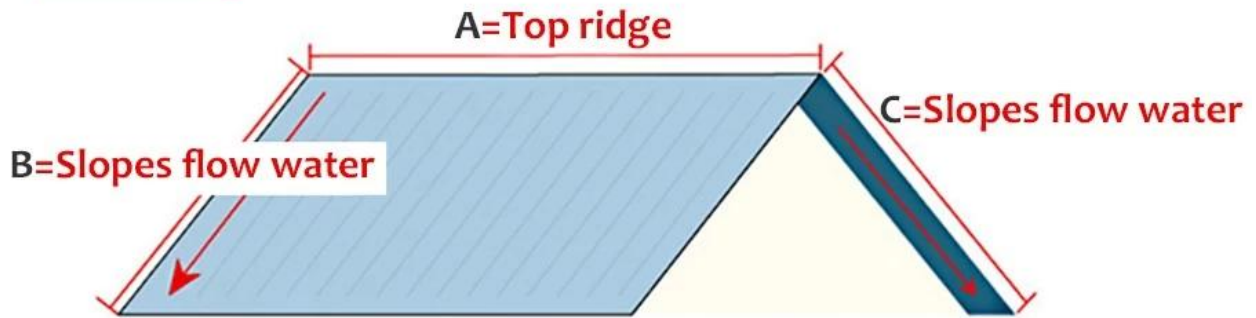

1. Measure the dimension of the **A** top ridge.
2. Measure the dimensions of **B**
3. Measure the dimensions of **C**

Measure all the dimensions (don't forget the eaves)

four sides

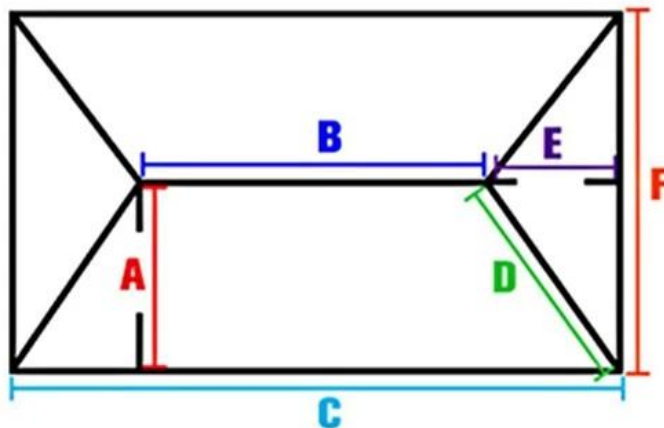

1. Measure the dimension of the **B** top ridge.
2. Measure the dimensions of ramp **A**
3. Measure the width of **C**
4. Measure the dimensions of the **D** diagonal ridge.
5. Measure the dimensions of ramp **E**
6. Measure the width of **F**

Measure all the dimensions (don't forget the eaves)

Project show pictures

Guangxi bungalow renovation



Qingyuan Scenic Area



Foshan residential roof



Renovation of old houses in Guangzhou



Product comparison

We're not afraid of contrast. Quality is the last word.

Zhongxingsheng



General manufacturers




Long-lasting color, durable



Inferior resin tiles are easy to fade



Only three layers of brand new material are produced.

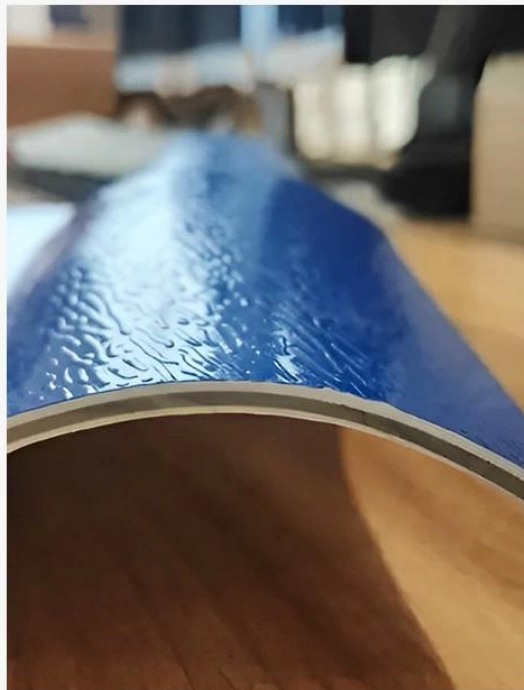

Four layers are compressed and mostly recycled material

Our Factory

Zhongxingcheng New Material Co., Ltd 專業生產 各種規格 瓦片 , 瓦片 瓦片 瓦片 , 瓦片 瓦片 瓦片 , 瓦片 瓦片 瓦片 瓦片 瓦片 瓦片 ASA, 瓦片 瓦片 瓦片 瓦片 瓦片 APVC, 瓦片 PVC 瓦片 , 瓦片 瓦片 瓦片 PVC, 瓦片 PVC, 瓦片 瓦片 瓦片 FRP, PVC, 瓦片 瓦片 瓦片.



Factory display



9 production lines



Raw material warehouse



Exhibition



Certificate

Official quality inspection, quality assurance

In line with the national roofing building materials standard.



.0000 000000 000000 000 00000000 00 000000 000000 00 ,00000 00000 000000*

?0000 00000000 00 0000 000000 00 000000 00 000000 0000 0000 0000 0000*

000000 00000000 000000 ,00 * OEM & ODM. .0000 000000 00 00000 0000 00000000 000000 0000

?0000 000000 00 000000000 0000*

.00000000 0000000 0000000 0000 00 ,00000 00000000 00000 00 0000 0000 0000*

?00000000 00 00000000 00000 00 0000000 0000 000000000 00 00000 00000 0000 0000*

0000 0000 0000 ?00000000 00000 00 00000 00000 0000 0000 ,00000 000000000 00 00000 00000000 000000 .00000000 000000 ,00*
.000000 00000000 000000 00

?0000 00000 000000 0000*

000000 * : T/T 30% .000000000 000000 000000 ,000000

.30% 00 0000000 000000 0000000 0000 7 00000 :0000000 0000000 0000 •

0000000 0000 • FOB: 000000 ,0000'0000000000 ,0000000